



1 2 3 4 5 6 7 8


A

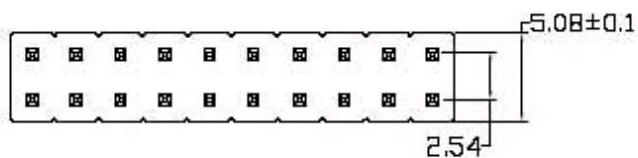

B

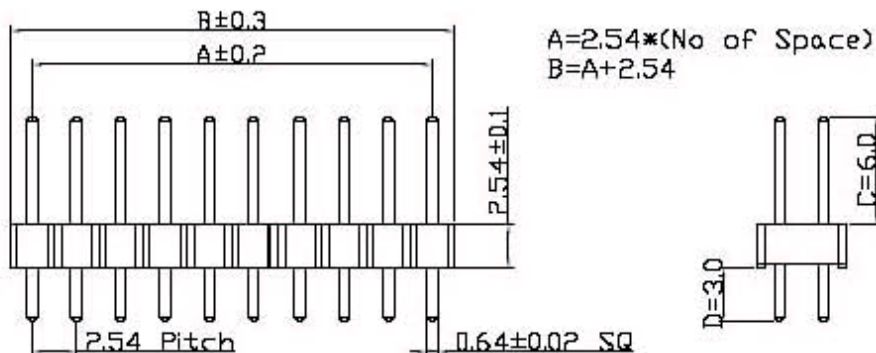

D




SPECIFICATIONS

Current Rating: 3 Amps
Dielectric Withstanding: AC 500V
Operating Temperature: -40°C to +105°C
Max Processing Temp: 230° for 30-60 seconds
(260° for 10 seconds)

MATERIAL&FINISH

Contact: Brass
Insulator Material: PBT
Color: Black
Finish: Gold Flash Plated Over Nickel

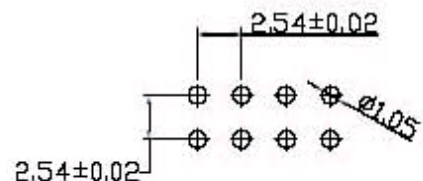

P.C.Board Layout

E

F

G

T&T Connection System Co., Ltd.

UNIT

SCALE

PART NAME

MM

2:1

2.54X2.54 Pin Header Dual Row
Straight Type(C=6.0 D=3.0)

H

制表日:2003/07/15

DRAWING.

APPROVED

APPD.

CKD.

TOLERANCE

PART NO.

REV.

JEFFREY

± 0.3

PHDS-xx-6/3

A

1 2 3 4 5 6 7 8