


1 2 3 4 5 6 7 8

A


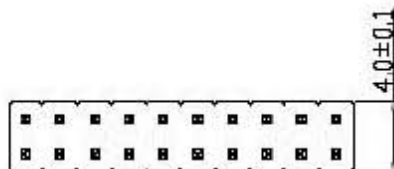


$$A=2.0 \times (\text{No of Space})$$

$$B=A+2.0$$

B

C

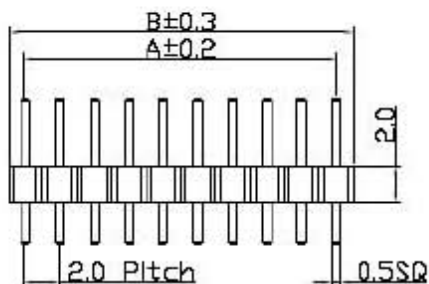

D

E

F

G

H

A

B

C

D

E

F

G


H

SPECIFICATIONS

Current Rating: 2 Amps
Dielectric Withstanding: AC 500V
Operating Temperature: -40°C to +105°C
Max Processing Temp: 230° for 30-60 seconds
(260° for 10 seconds)

MATERIAL&FINISH

Contact: Brass
Insulator Material: PBT
Color: Black
Finish: Gold Flash Plated Over Nickel

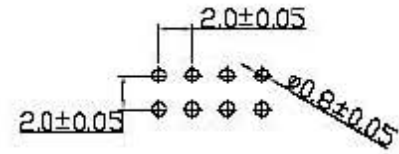

P.C.Board Layout

T&T Connection System Co., Ltd.

UNIT

SCALE

PART NAME

MM

2:1

2.0x2.0 Pin Header Dual Row
Straight H=2.0(C=3.9 D=2.8)

APPD.

CKD.

TOLERANCE

PART NO.

REV.

制表日: 2003/07/15

DRAWING.

APPROVED

JEFFREY

± 0.3

A

1 2 3 4 5 6 7 8