

1 2 3 4 5 6 7 8

A

B

C

D

E

F

G

H

A

B

C



D

E

F


G

H

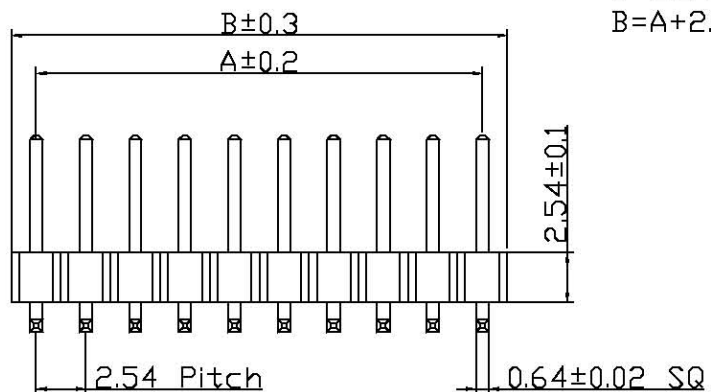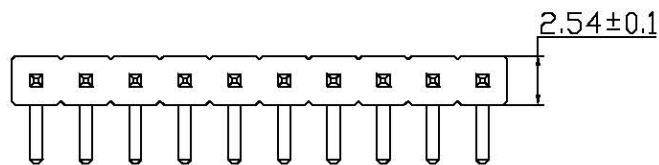

$$A = 2.54 * (\text{No of Space})$$

$$B = A + 2.54$$




SPECIFICATIONS

Current Rating: 3 Amps
Dielectric Withstanding: AC 500V
Operating Temperature: -40°C to +105°C
Max Processing Temp: 230° for 30~60 seconds
(260° for 10 seconds)

MATERIAL&FINISH

Contact: Brass
Insulator Material: PBT
Color: Black
Finish: Gold Flash Plated Over Nickel



P.C.Board Layout

T&T Connection System Co., Ltd.

UNIT

SCALE

PART NAME

MM

2 : 1

2.54 Pin Header Single Row
Right Angle (C=6.0 D=3.0 E=1.18)

APPD.

CKD.

TOLERANCE

PART NO.

REV.

DATE: 2003/07/15

DRAWING.

APPROVED

Jane

± 0.3

PHSR-xx

A

1 2 3 4 5 6 7 8