
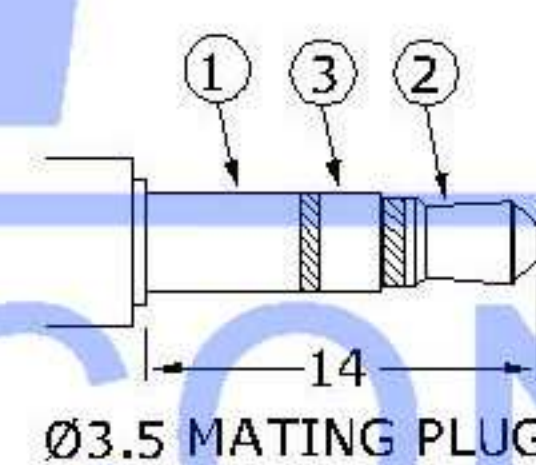
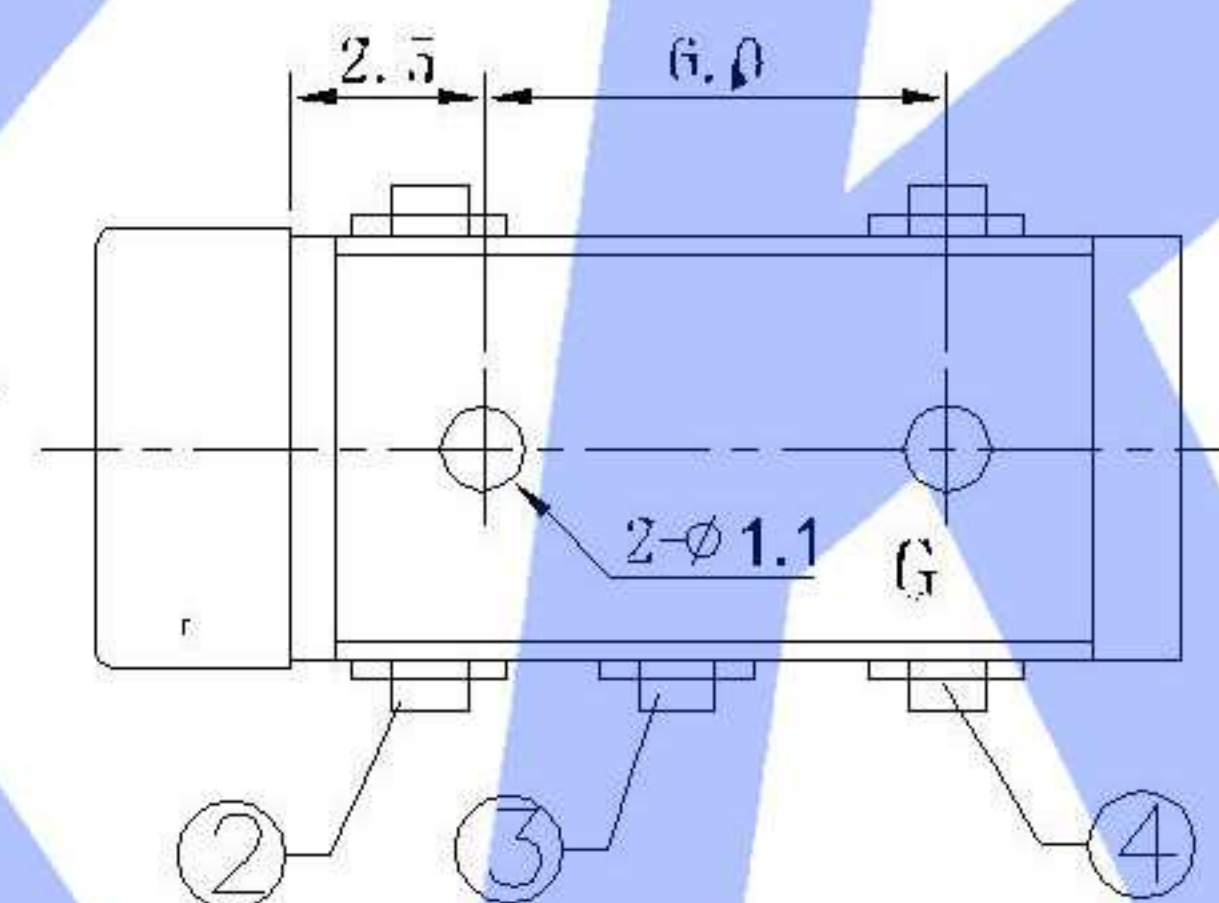
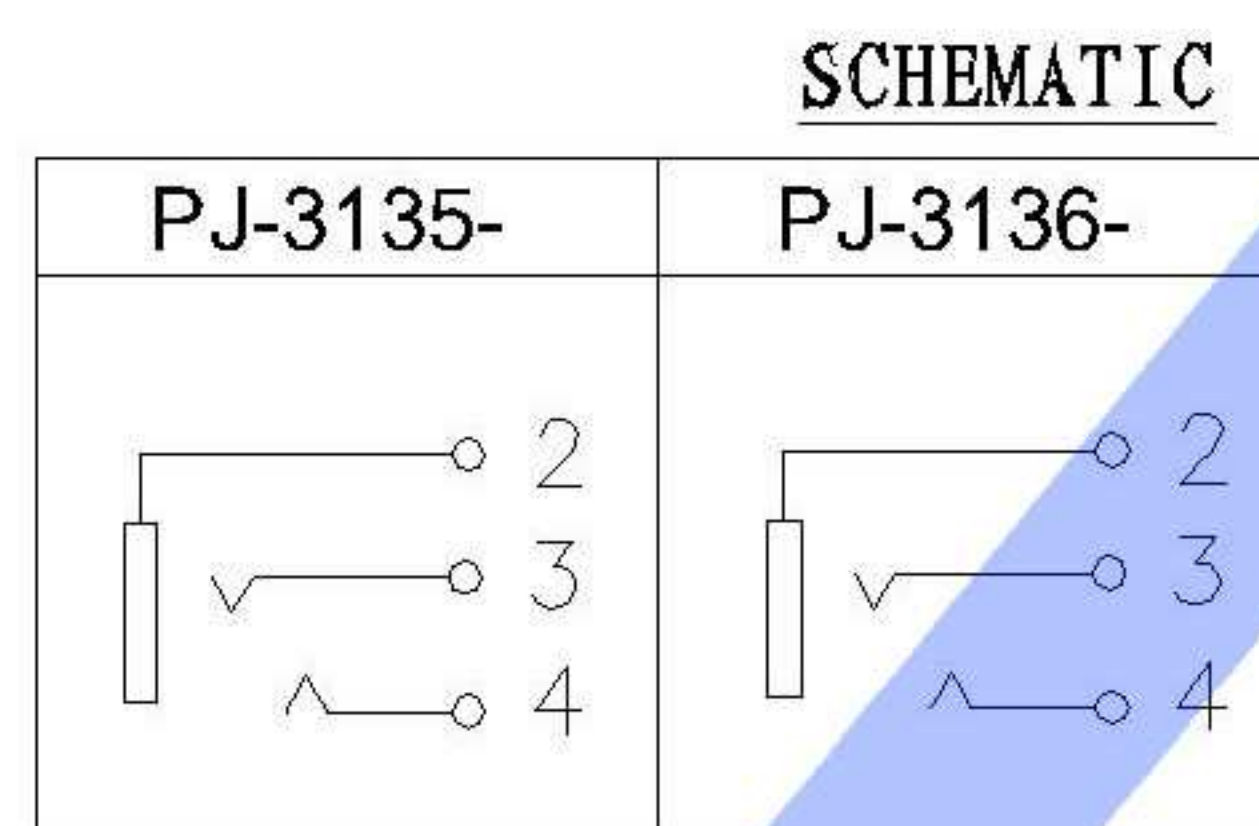
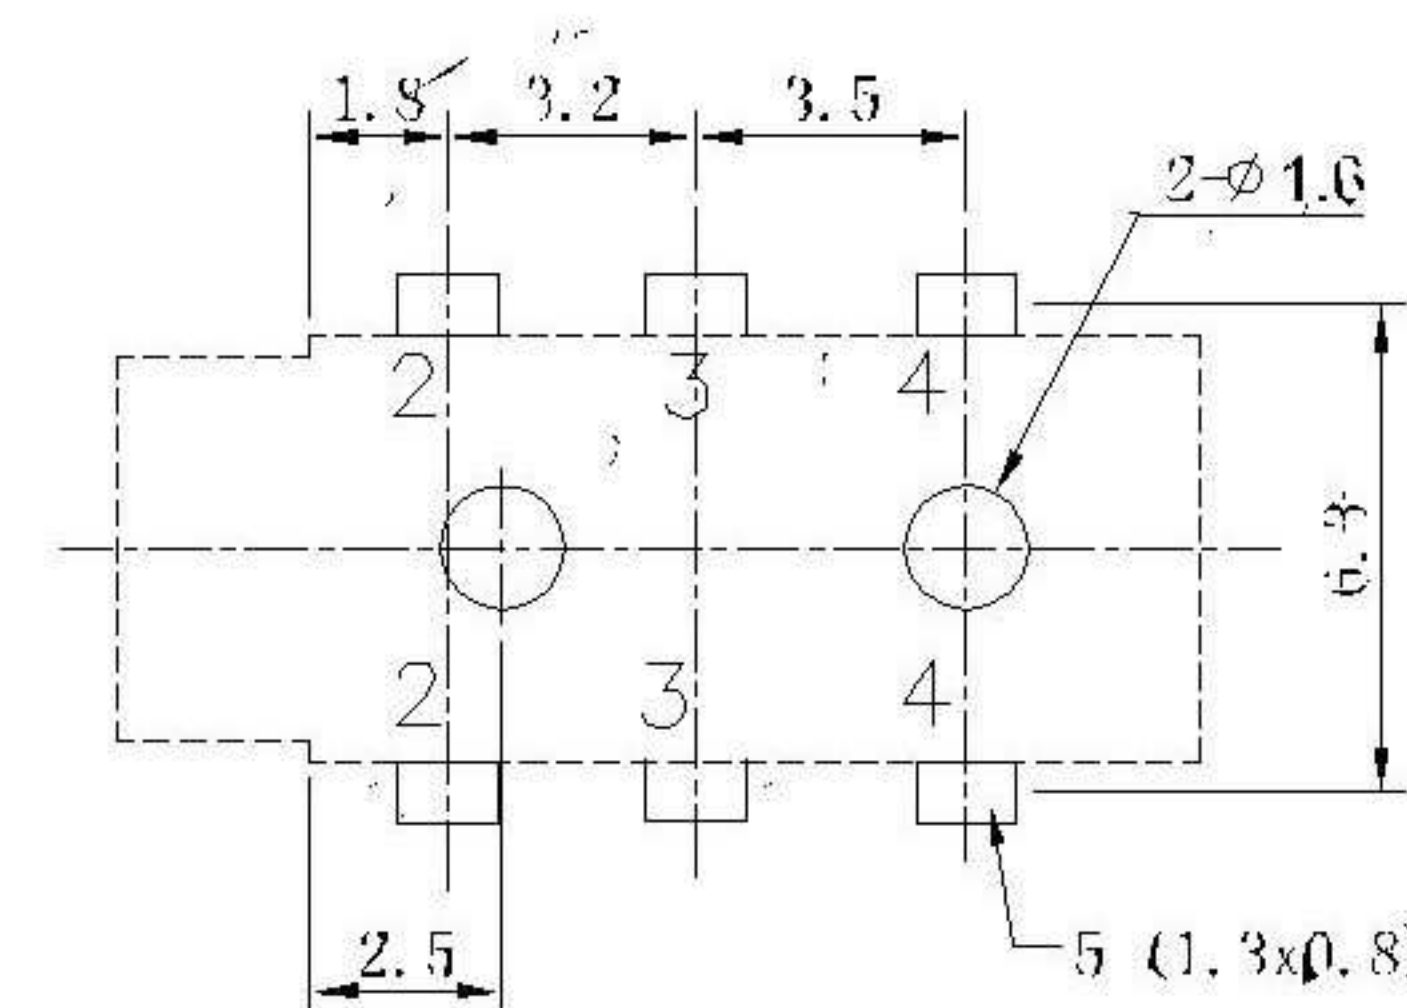
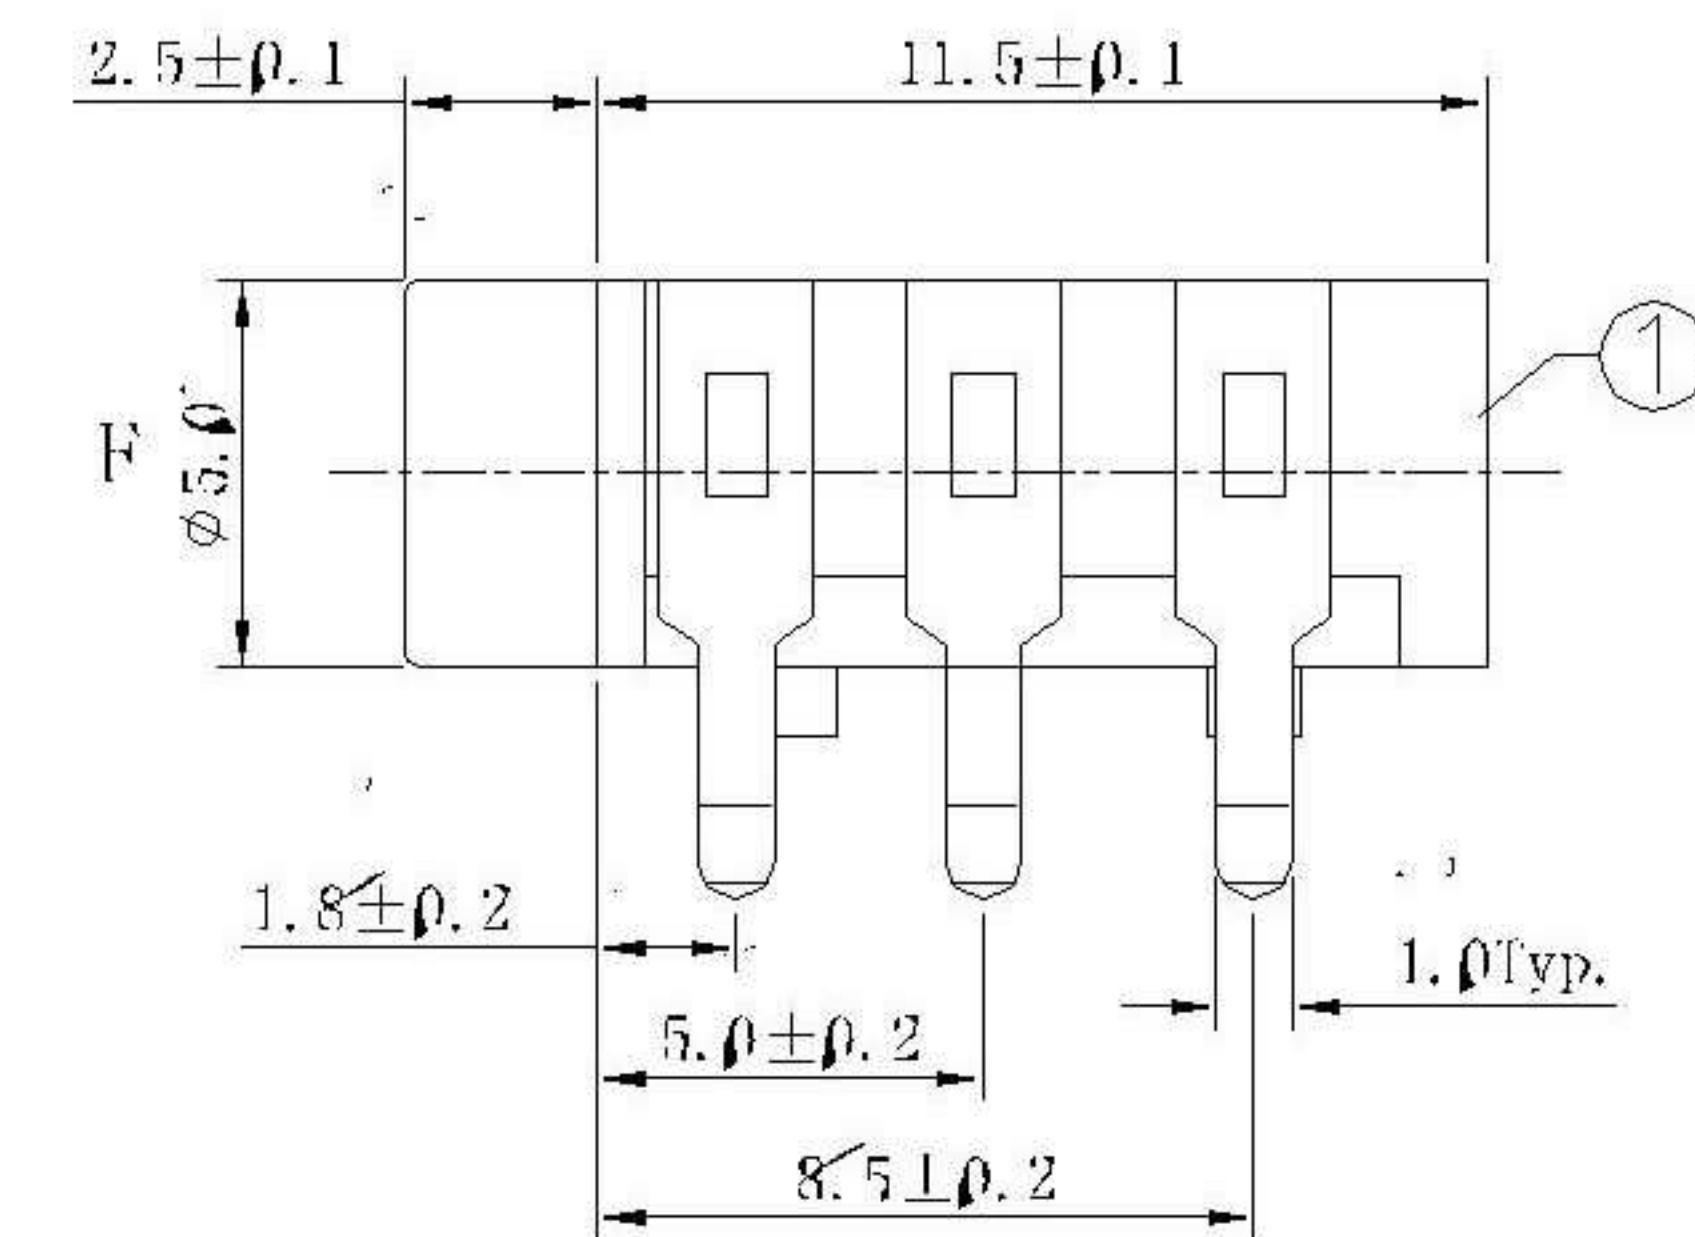
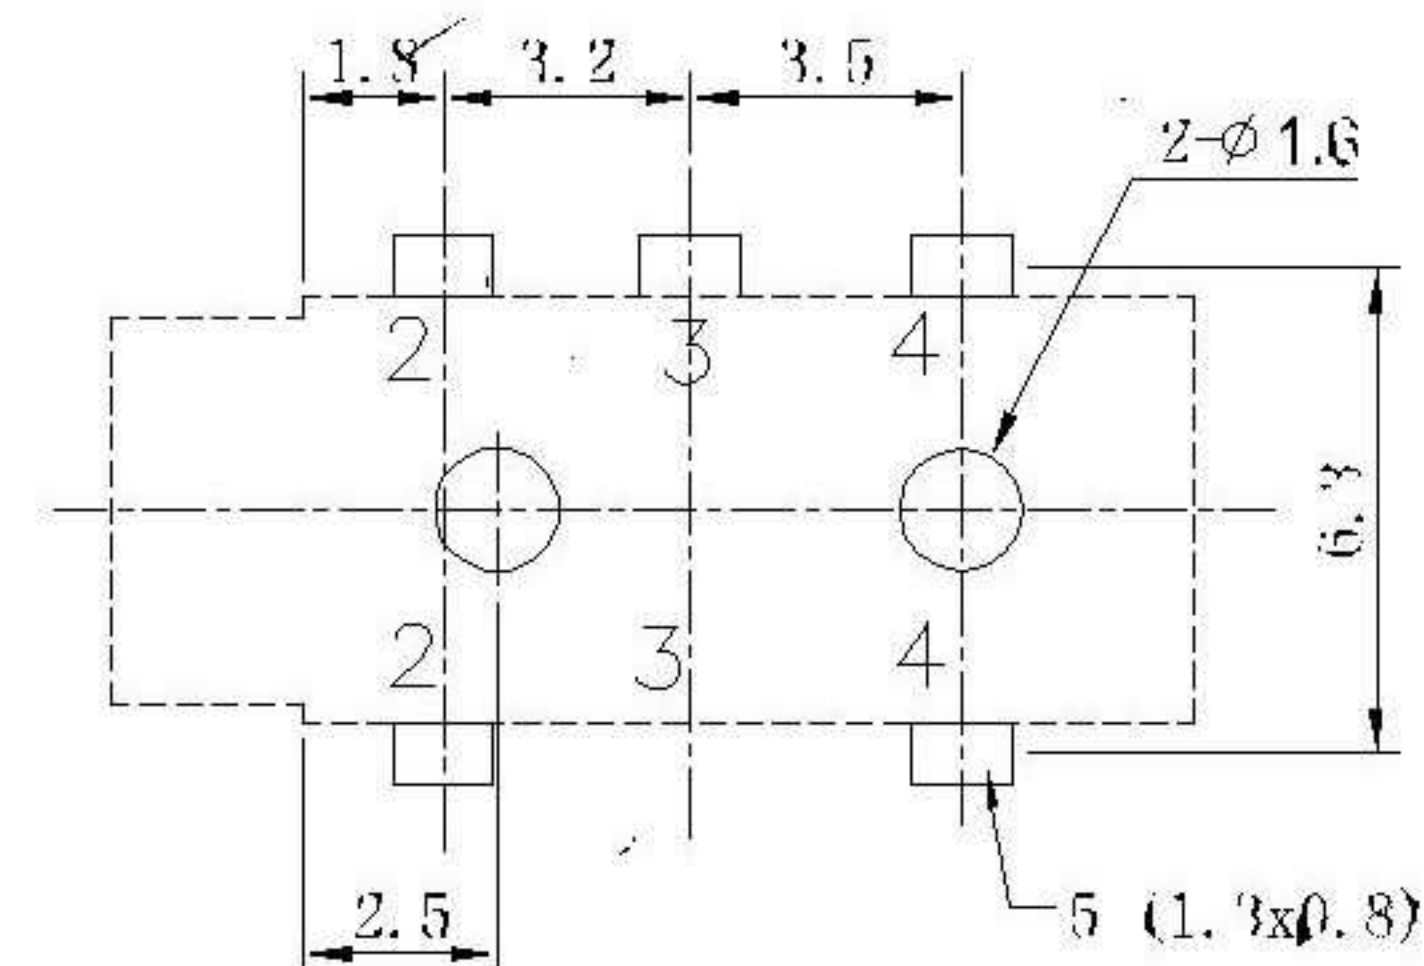
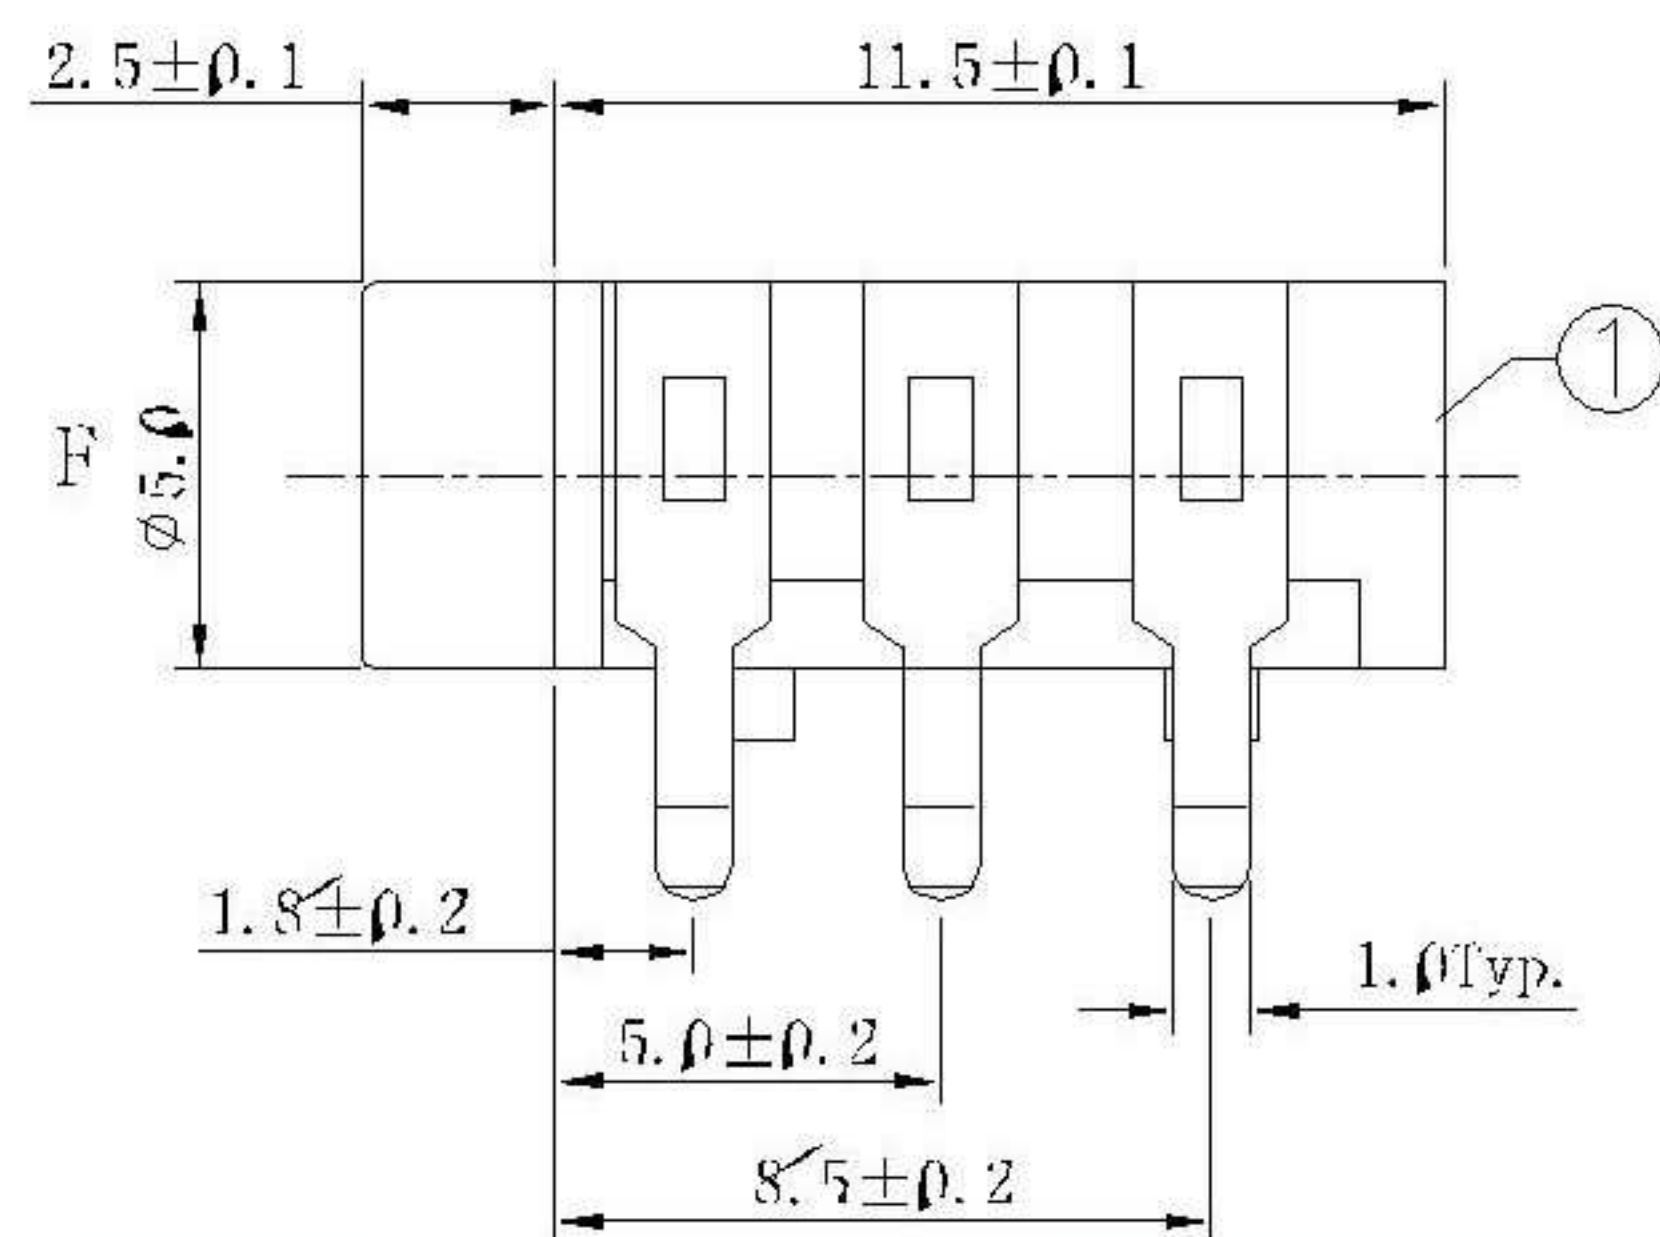


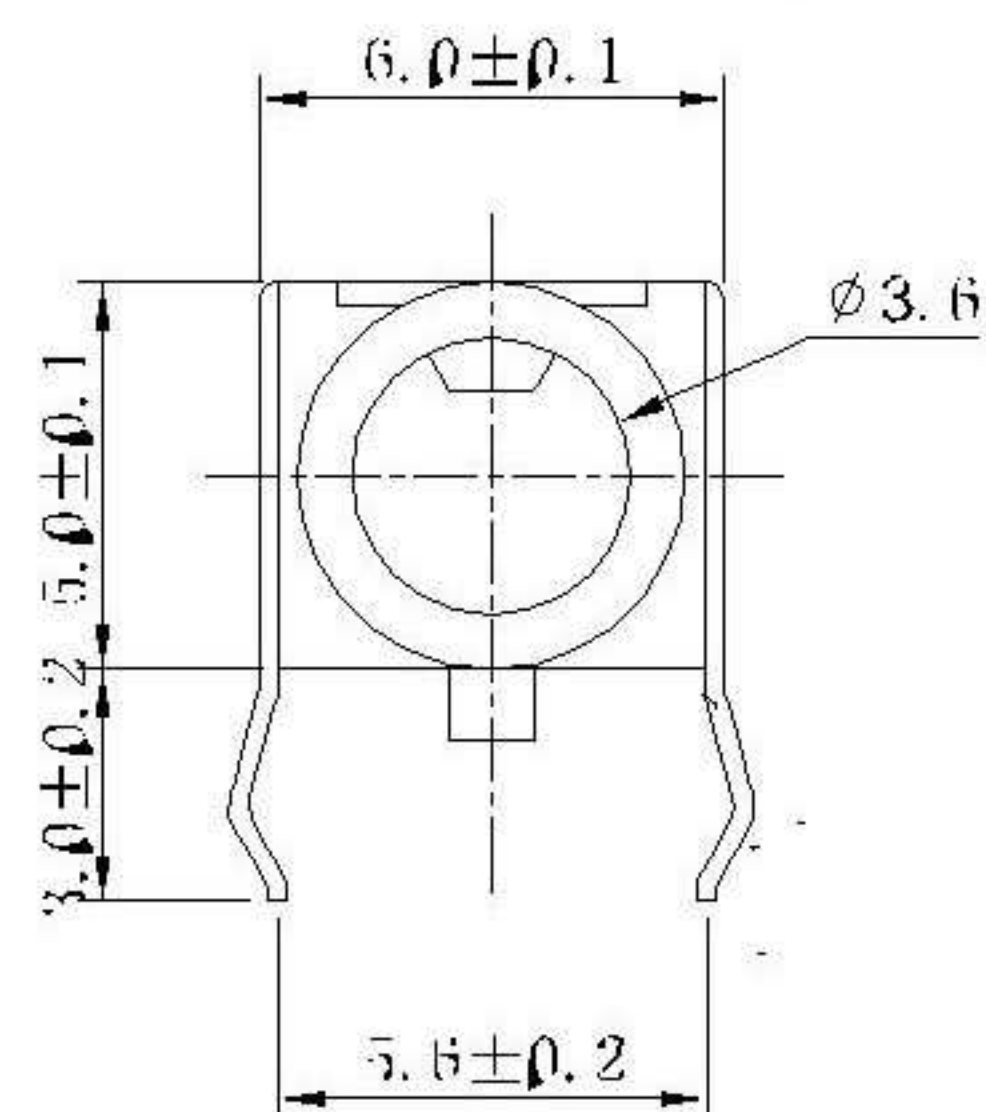

PJ-3135-

SPECIFICATION

- 1 Rating : DC 30V 10A
- 2 Contact resistance : $\leq 30m\Omega$
- 3 Insulation resistance : $\geq 100M\Omega$
- 4 Withstand voltage : 500VAC
- 5 Insertion and extraction force : 3-20N
- 6 life test : 5,000 cycles

PJ-3136-

R:red	G:green
Y:yellow	B:black
W:white	T:transparent

	MATERIAL	PLATING
terminal 1	copper all oy	silver
terminal 2	copper all oy	silver
terminal 3	copper all oy	silver
terminal 4	copper all oy	silver
plastic	PA9T	

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
△X					ANGULAR
△X					$L \leq 4$
△X					$4 < L \leq 16$
					$16 < L \leq 63$
					$L > 63$

DSND	DATE	SCALE: N/A	MODEL TYPE:
DWN	DATE	VIEW:	3.5 PHONE JACK
CHKD	DATE	UNIT: mm	PART NO.:
APPD	DATE	SIZE: A4	DWG NO.: PJ-313X-X
XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT
			1.0g
			SHEET
			1/1
			REVISION
			A0