

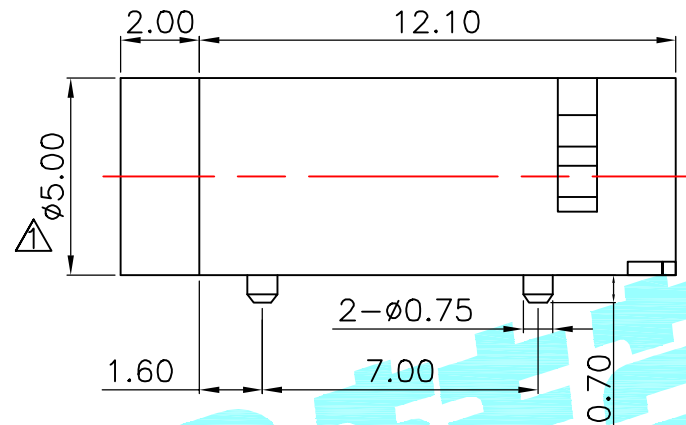
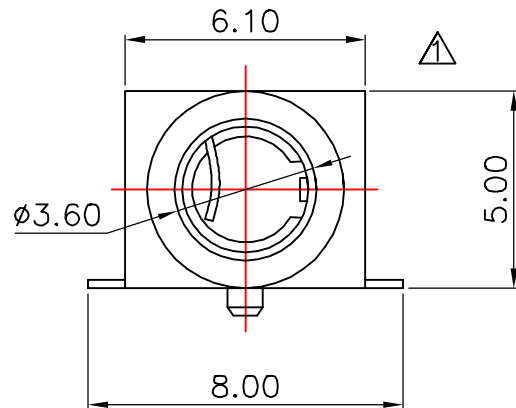


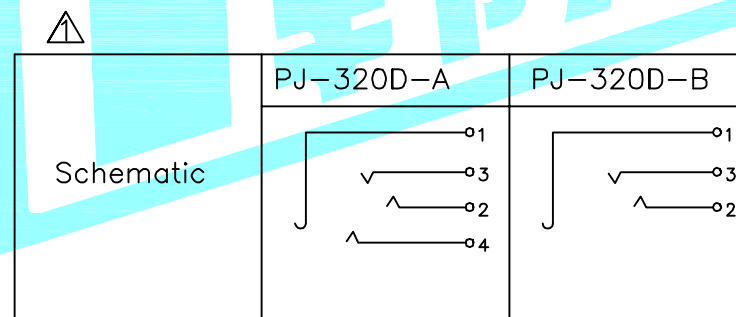

P.C.B Layout (TOP view)

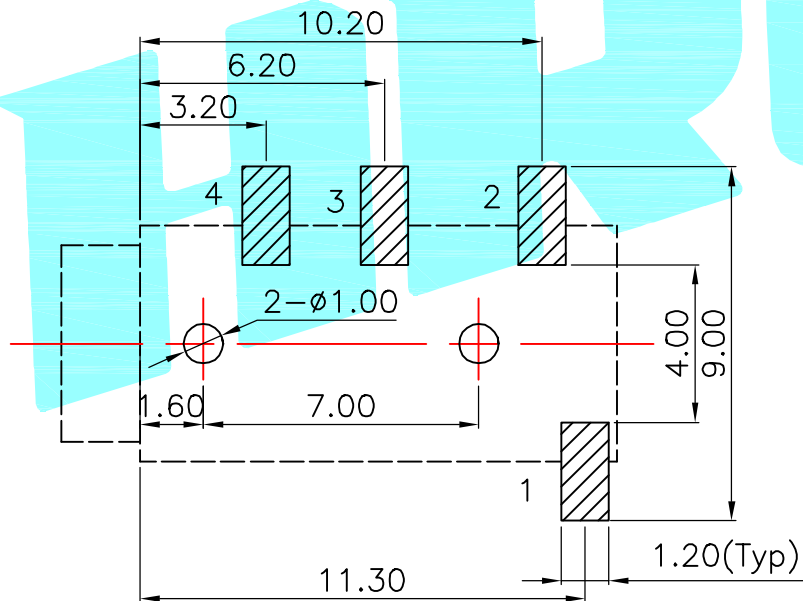

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles

②	Terminal	——	4	Phosphor bronze	Au Plating	——
①	Housing	——	1	Nylon	Black	——
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE		HRO 華強 ELECTRONICS CO.,LTD	
DRAWN		J.X.Zhang	2016/5/3			
CHECKED			TITLE:			
APPROVALS			PART NO.			
					PHONE JACKS	
					PJ-320D	
TOLERANCES ARE		30~100 μm	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			
		5~10	±0.15			
		~ 5	±0.10			
		±2'		DRAWING NO.	——	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	B					
	A					