



SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃

Contact Material:Brass





Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PBT

Max.Processing Temp: 180℃ for 30-60 seconds
(200℃ for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

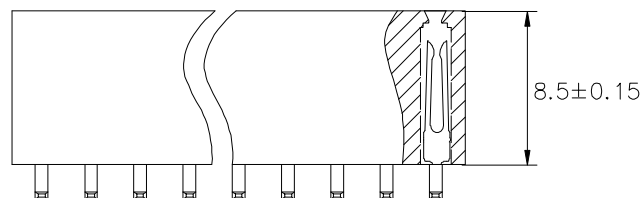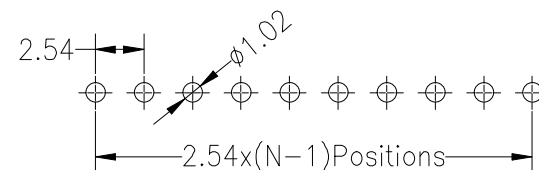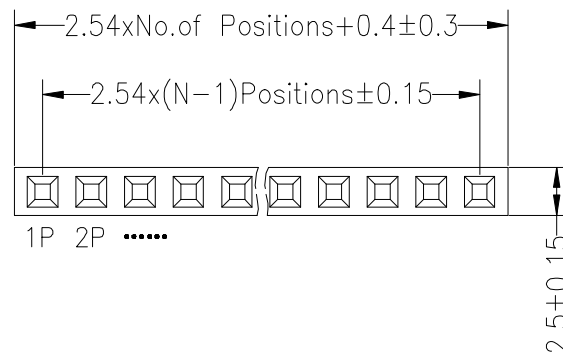

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

CHECK

APPROVE

YiYuSheng

12.03.28

SCALE

UNIT

SIZE

SHEET

PROJ.

FIT

mm

A4

1/1

1/1

1/1

深圳市华灿天禄电子有限公司

PART NO.

PM254-1-N-W-8.5

TITLE:

2.54PF H8.5mm 1xNpin 180° W2.5mm

A0 2012.03.28 NEW DRAWING

REV DATE MODIFICATION DESCRIPTION

CHANGE