16mm SIZE METAL SHAFT POTENTIOMETERS

ALPHA

Rotary 16mm size metal shaft potentiometers

- 18-teeth shaft
- shaft diameter: 6mm
- shaft length: 30mm (POM16, POS16)
  15mm (POM1615)

Technical parameters:

Total rotation angle:	300° ±5°	
Value tolerance:	±30%	
Power rating:	lin: 0,2 W	log: 0,1 W
Max. operating voltage:	lin: 200 V	log: 150 V
Insulation resistance:	min. 100 MOhm at 500 VDC	
Rotational life:	> 15000 cycles	
Operating temperature:	-10°C ... +70°C	
Packing:	200 pcs	

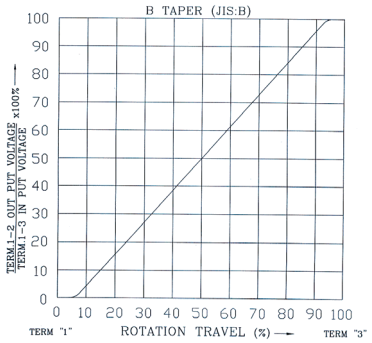

taper linear

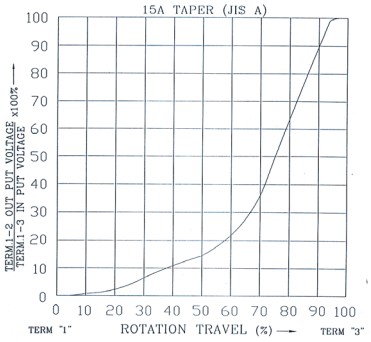

taper logarithmic

Potentiometers MONO

POM16

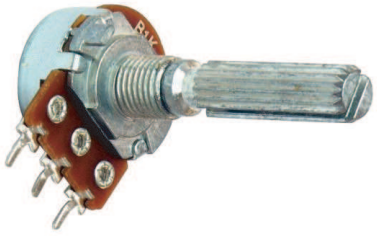

POM1615



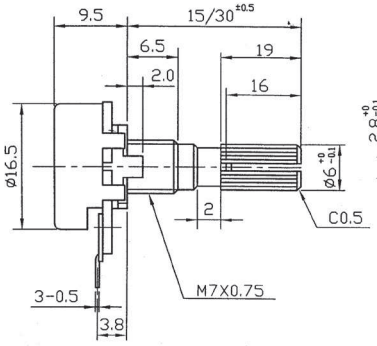

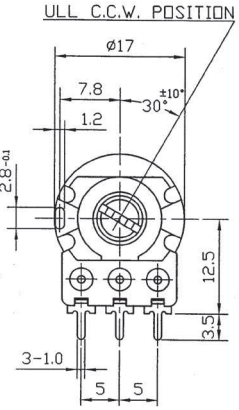

RoHS

Type	Value	Taper
POM16 LIN 1K B	1 K	LIN
POM16 LIN 5K B	5 K	LIN
POM16 LIN 10K B	10 K	LIN
POM16 LIN 50K B	50 K	LIN
POM16 LIN 100K B	100 K	LIN
POM16 LIN 200K B	200 K	LIN
POM16 LIN 500K B	500 K	LIN
POM16 LIN 1M B	1 M	LIN
POM16 LOG 1K A	1 K	LOG
POM16 LOG 5K A	5 K	LOG
POM16 LOG 10K A	10 K	LOG
POM16 LOG 50K A	50 K	LOG
POM16 LOG 100K A	100 K	LOG
POM16 LOG 200K A	200 K	LOG
POM16 LOG 500K A	500 K	LOG
POM16 LOG 1M A	1 M	LOG
POM1615 LIN 1K B	1 K	LIN
POM1615 LIN 5K B	5 K	LIN
POM1615 LIN 10K B	10 K	LIN
POM1615 LIN 50K B	50 K	LIN
POM1615 LIN 100K B	100 K	LIN
POM1615 LIN 500K B	500 K	LIN

Potentiometers STEREO

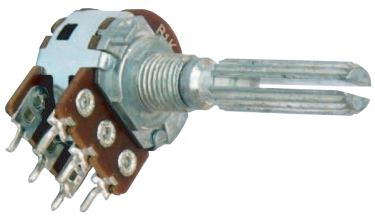

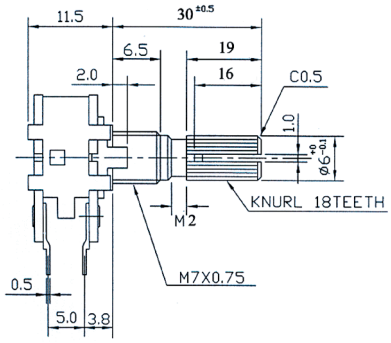

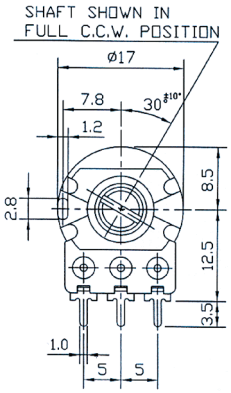

RoHS

Type	Value	Taper
POS16 LIN 1K B	1 K	LIN
POS16 LIN 5K B	5 K	LIN
POS16 LIN 10K B	10 K	LIN
POS16 LIN 50K B	50 K	LIN
POS16 LIN 100K B	100 K	LIN
POS16 LIN 200K B	200 K	LIN
POS16 LIN 500K B	500 K	LIN
POS16 LIN 1M B	1 M	LIN
POS16 LOG 1K A	1 K	LOG
POS16 LOG 5K A	5 K	LOG
POS16 LOG 10K A	10 K	LOG
POS16 LOG 50K A	50 K	LOG
POS16 LOG 100K A	100 K	LOG
POS16 LOG 200K A	200 K	LOG
POS16 LOG 500K A	500 K	LOG
POS16 LOG 1M A	1 M	LOG