


Specification:

- 1) Rating (if not described next to the switch):
3 A 125 VAC; 1 A 250 VAC
- 2) Contact Resistance: 20 mΩ max.
- 3) Insulation Resistance: 500 VDC 100 MΩ min.
- 4) Dielectric strength: 1000 VAC, 1 minute
- 5) Electrical Life: 50000 cycles

PS10B2BK

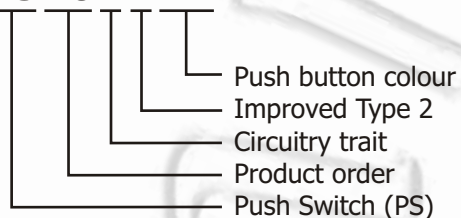

CIRCUITRY TRAIT

A	ON - OFF	Push on/Push off	With lock
B	OFF - (ON)	Push on	Momentary
C	ON - (OFF)	Push off	Momentary


() indicates momentary

PUSH BUTTON COLOUR


RD	red
GN	green
OR	orange
BU	blue
WH	white
BK	black
YL	yellow




PS11A ON-OFF
PS11B OFF-(ON)
PS11C ON-(OFF)

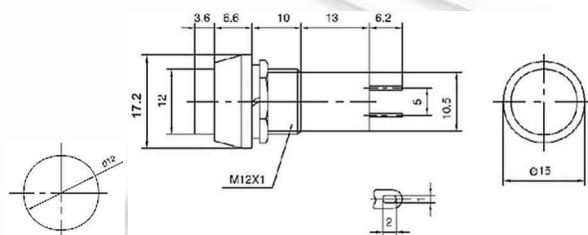


PS12A ON-OFF
PS12B OFF-(ON)
PS12C ON-(OFF)

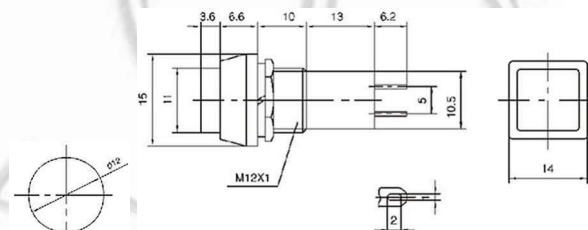


PS14A ON-OFF
PS14B OFF-(ON)
PS14C ON-(OFF)

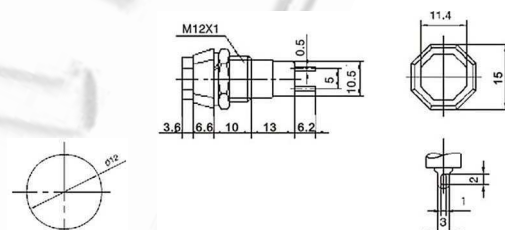


PS16A ON-OFF
PS16B OFF-(ON)
PS16C ON-(OFF)

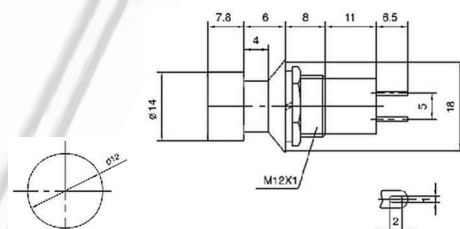

PS13B OFF-(ON)
PS13C ON-(OFF)
 8 A 125 VAC; 4 A 250 VAC

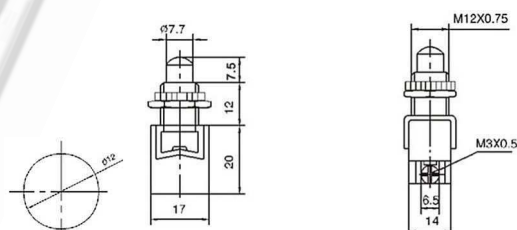


PS10B OFF-(ON)
 (plastic rod)

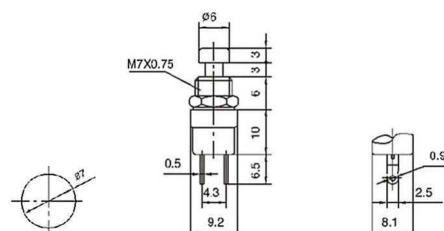





PS10B2 OFF-(ON)
PS10C2 ON-(OFF)
 (metal rod)

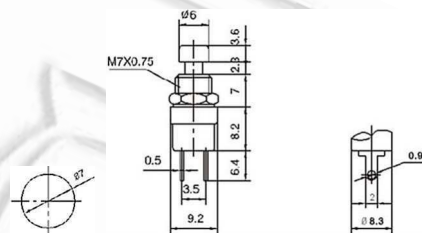


PS15A ON-OFF

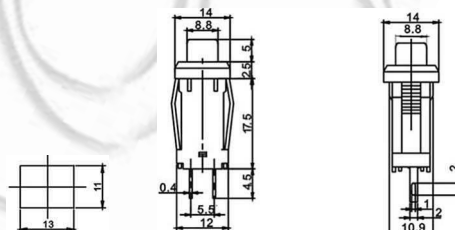


PS15B OFF-(ON)
PS15C ON-(OFF)

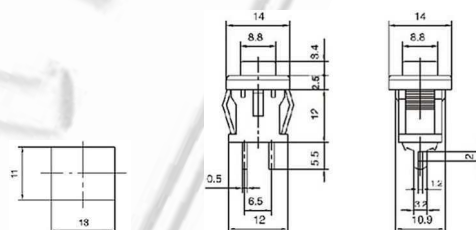


PS17A ON-OFF
 4 A 125 VAC; 2 A 250 VAC

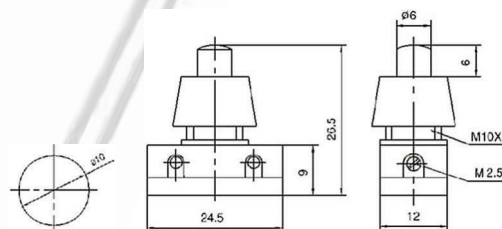

PS17A2 ON-OFF
 (PS17B)

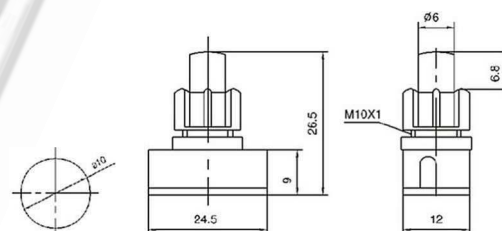


PS17A3 ON-OFF
 (PBS-17B)
 4 A 125 VAC; 2 A 250 VAC

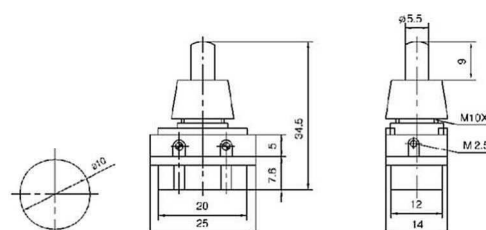





PS19B OFF-(ON)
PS19C ON-(OFF)
 5 A 125 VAC; 2.5 A 250 VAC

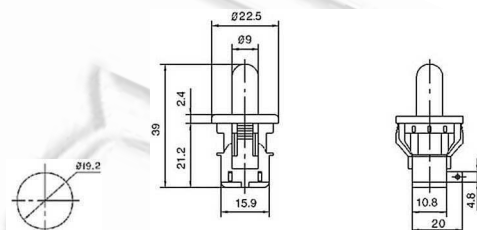


PS19B2 OFF-(ON)
PS19C2 ON-(OFF)
 5 A 125 VAC; 2.5 A 250 VAC

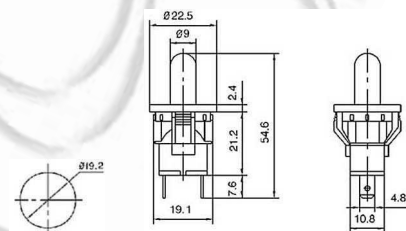


PS19B3 OFF-(ON)
PS19C3 ON-(OFF)
 5 A 125 VAC; 2.5 A 250 VAC

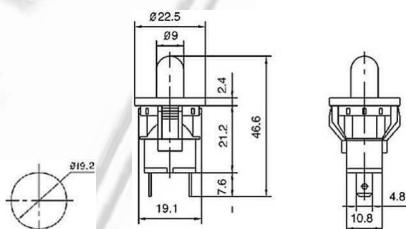


PS20A ON-OFF
PS20B OFF-(ON)

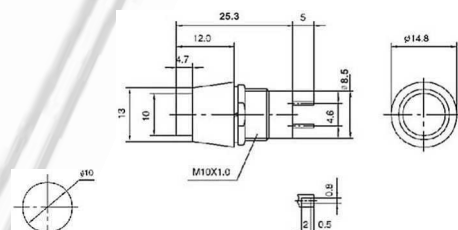

PS20A2 ON-OFF
PS20B2 OFF-(ON)

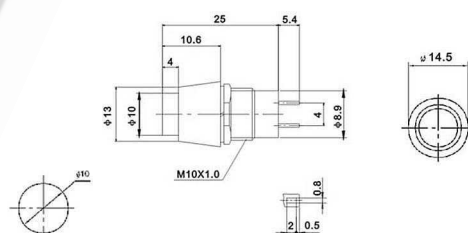


PS21A ON-OFF
PS21B OFF-(ON)

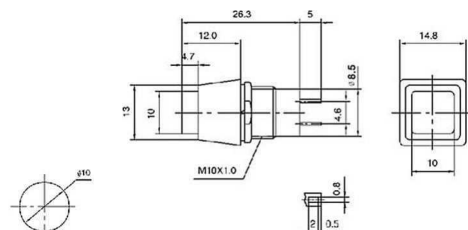





PS22A ON-OFF
PS22B OFF-(ON)

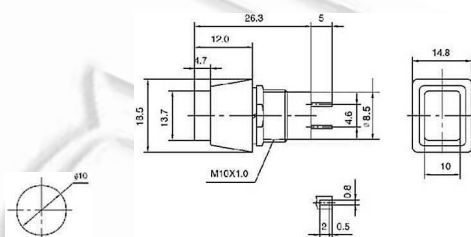


PS23B OFF-(ON)

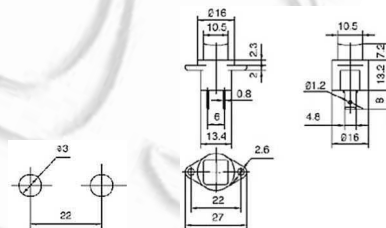


PS24B2 OFF-(ON)
PS24C2 ON-(OFF)
10 A 125 VAC; 2.5 A 250 VAC
SPST 2P

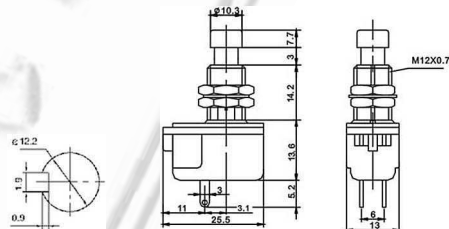


PS24102 ON-ON
PS24112 ON-(ON)
4 A 125 VAC; 2 A 250 VAC
SPDT 3P
(L=14.2, 11.8, 9.8)

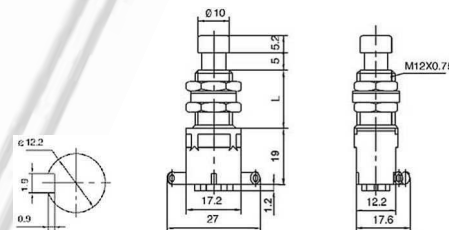

PS24202 ON-ON
PS24212 ON-(ON)
4 A 125 VAC; 2 A 250 VAC
DPDT 6P
(L=14.2, 11.8, 9.8)

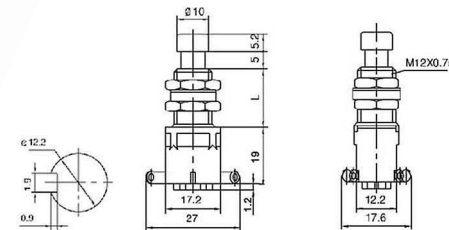

PS24102P ON-ON
PS24112P ON-(ON)
4 A 125 VAC; 2 A 250 VAC
SPDT 3P
(L=14.2, 11.8, 9.8)

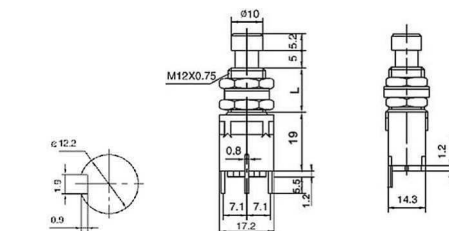



Technical drawing of a mechanical part. The drawing includes a perspective view on the left and a cross-sectional view on the right. The cross-sectional view shows the following dimensions:

- Overall height: 19
- Top flange thickness: 2.4
- Internal thread section height: 10
- Bottom flange thickness: 6
- Internal thread section diameter: $\phi 13.5$
- Top flange outer diameter: $\phi 19$
- Internal thread section outer diameter: $\phi 12$
- Internal thread section inner diameter: $\phi 16$
- Internal thread section length: 6
- Internal thread section thread: M16X0.75
- Internal thread section thread pitch: 0.8
- Internal thread section thread length: 3.4
- Internal thread section thread pitch: $\phi 1.5$





Technical drawing of a bolt with the following dimensions and features:

- Head diameter: $\varnothing 16.6$
- Head width: 3.6
- Head thickness: 2.6
- Head width at base: 5
- Thread length: 4.6
- Thread specification: M12X0.75
- Thread pitch: 0.75
- Thread diameter: $\varnothing 12$
- Thread length: 2.8
- Thread pitch: 0.7
- Thread diameter: $\varnothing 11.8$
- Thread pitch: 0.7
- Thread diameter: $\varnothing 17$
- Thread pitch: 0.7
- Thread diameter: $\varnothing 14$
- Thread pitch: 0.4
- Thread diameter: $\varnothing 22.5$
- Thread pitch: 14.5

