
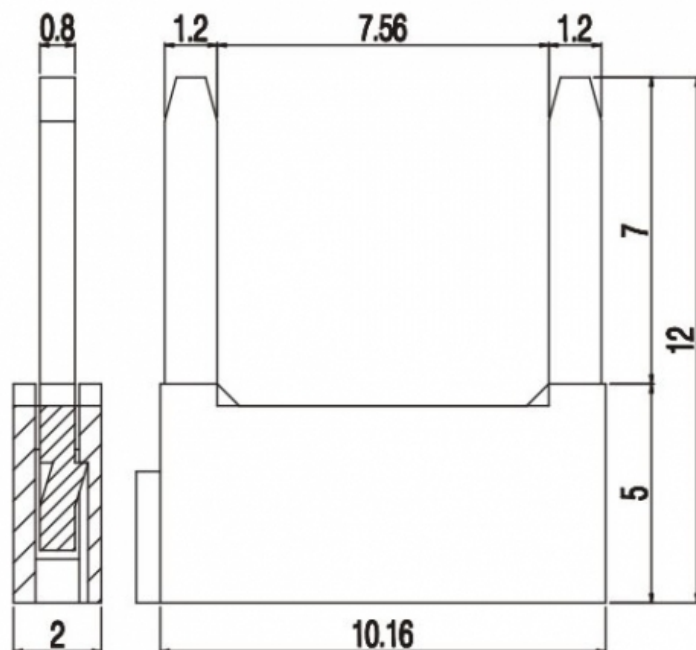


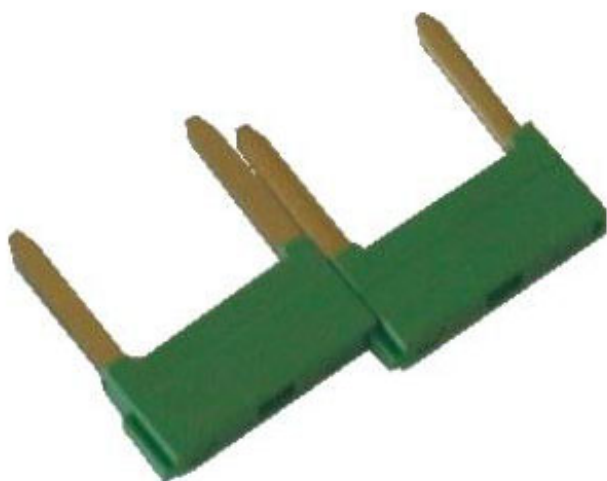

Insertion bridge - Pitch 10,16 - Modular

GENERAL INFORMATION

pitch:	10,16 mm
housing height:	5,00 mm
housing depth:	2 mm
dimensional class:	n/a
wire section:	-
clamp opening size:	-
wire stripping:	-
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	24A
voltage:	-V
impulse voltage:	- kV

MECHANICAL CHARACTERISTICS

APPROVALS DATA



current:
voltage:
FILE:

-
-
-

-
-
-

-
-
-

MATERIALS

housing:	PA - UL 94 V0
screw:	n/a
clamp/spring:	n/a
terminal:	Tin-plated copper alloy

AVAILABLE COLOURS



other colours:

upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	PT10	N/A	N/A	N/A