
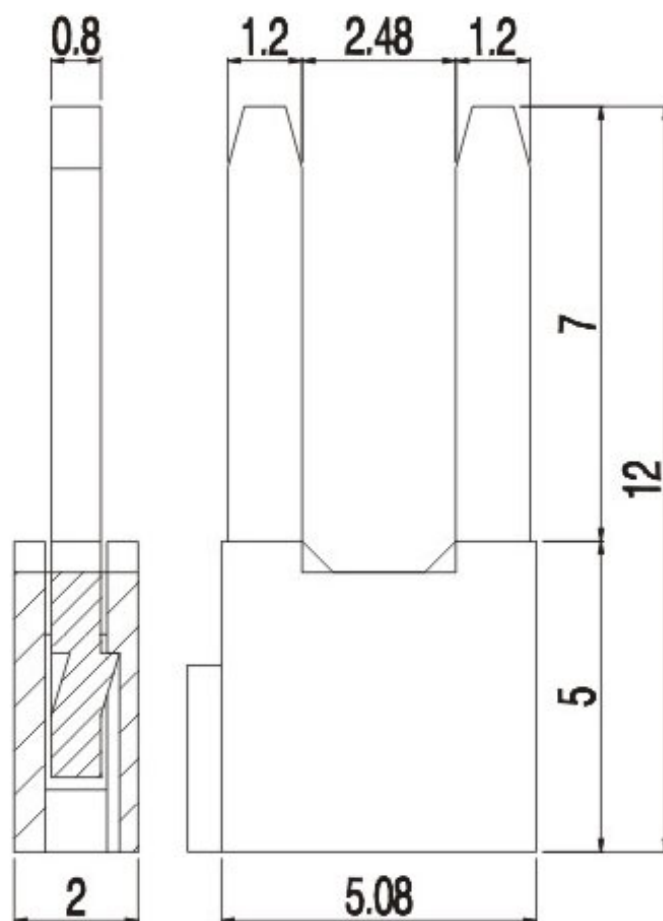


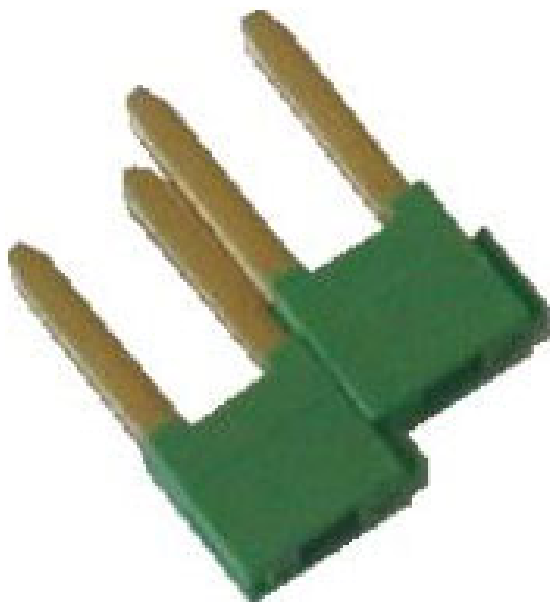

Insertion bridge - Pitch 5,08 - Modular

GENERAL INFORMATION

pitch:	5,08 mm
housing height:	5,00 mm
housing depth:	2 mm
dimensional class:	n/a
wire section:	-
clamp opening size:	-
wire stripping:	-
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	24A
voltage:	-V
impulse voltage:	- kV

MECHANICAL CHARACTERISTICS

APPROVALS DATA



current:
voltage:

-
-
-

-
-
-

-
-
-

FILE: - -

MATERIALS

housing: PA - UL 94 V0
screw: n/a
clamp/spring: n/a
terminal: Nickeled copper alloy

AVAILABLE COLOURS

GN **GY** **BK** **BL** **RD** **YL** **OG**
other colours: upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	PT5	N/A	N/A	N/A