



Rating	16A 125VAC	ULUS UL CE CCC CCC CCC CCC	Mounting Hole	
	10A 250VAC			
	10A 125VAC			
	6A 250VAC			
Contact Resistance	50m ohm Max.			
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute			
Operation Temperature	-20°C~85°C			
Switch Function	2P SPST ON-OFF			
			Thickness:2.0~3.0	Thickness:0.7~3.0







Material:

Frame: White (RAL9016) Gloss finish,
Nylon#66



Actuator: White (RAL9016) Gloss finish,
Nylon#66

Terminals: Silver plated, Copper alloy
Printed: Black , hot stamping

Circuit Diagram

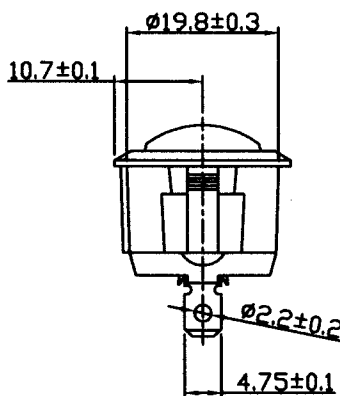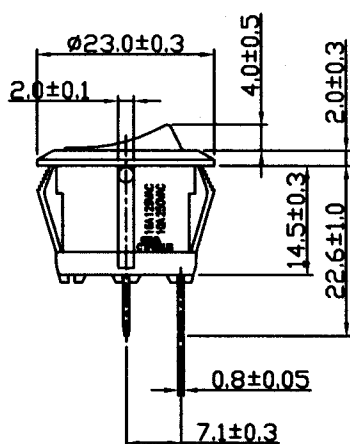

C8\R13\R13-112A5-02(1824303)

									△
									△
Date		Name	Description					NO	
Drawn	Checked	Approved	SCI BOM NO.	1824303		Model Name	ROCKER SWITCH		
曹盈芳			Customer No.			Model No.	R13-112A5-02	REV.	
08/26/'08	8/26/08	8/26/08	Unit	mm		SHIN CHIN INDUSTRIAL CO., LTD.			0