





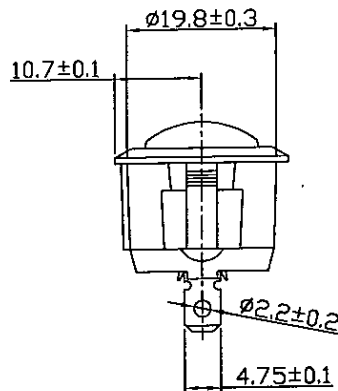
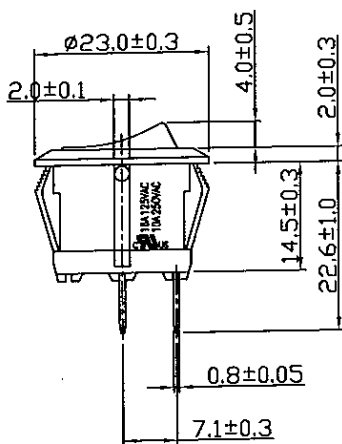


Rating	16A 125VAC		Mounting Hole		
	10A 250VAC				
	10A 125VAC				
	6A 250VAC				
Contact Resistance	50m ohm Max.		Thickness:2.0~3.0		
Insulation Resistance	DC 500V 100M ohm Min.		Thickness:0.7~3.0		
Dielectric Strength	AC 1500V 1 minute		Circuit Diagram		
Operation Temperature	-20°C~85°C				
Switch Function	2P SPST ON-OFF				

Material:


Frame: White Gloss finish, Nylon#66

Actuator: White Gloss finish, Nylon#66



原稿

C8\R13\R13-112A5-02(1821889)

						△	
						△	
Date		Name		Description		NO	
Drawn	Checked	Approved	SCI BOM NO.	1821889	Model Name	ROCKER SWITCH	
曹盈芳			Customer No.		Model No.	R13-112A5-02	REV. 0
01/12/'09		1/12/10	Unit	mm	SHIN CHIN INDUSTRIAL CO., LTD.		