








Rating	16A 125VAC, 10A 250VAC 	Mounting Hole		
	10A 125VAC, 6A 250VAC CQC			
	10(4)A 250V~ 			
	20A 12V DC, 10A 28V DC 			
Contact Resistance	50m ohm Max.	Thickness:2.0~3.0		
Insulation Resistance	DC 500V 100M ohm Min.	Thickness:0.7~3.0		
Dielectric Strength	AC 1500V 1 minute	Circuit Diagram		
Operation Temperature	-25°C~85°C			
Switch Function	2P SPST ON-OFF			

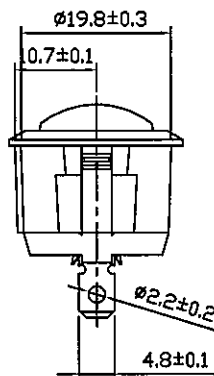

Material:
Frame: Black, Nylon#66
Actuator: Black, Nylon#66
Printed: None

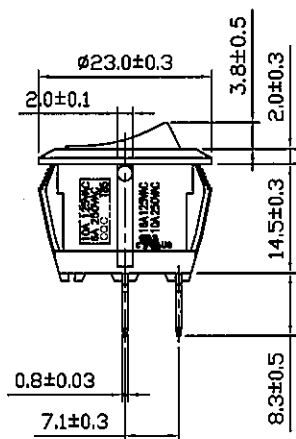

C8\R13\R13-112A-02(1820861)

06/13/'13	曹盈芳	依公司規定追加SCI Logo					
04/23/'10	曹盈芳	爲了整合安規取消CSA,追加ENEC\VED10的溫度刻字由T85提升25T85,追加CQC,					
		10A125VAC,6A250VAC,T85刻字。依客戶要求Rating追加20A 12V DC, 10A 28V DC					
Date	Name	Description					NO
Drawn	Checked	Approved	SCI BOM No.	1820860		Model Name	ROCKER SWITCH
曹盈芳			Customer No.			Model No.	R13-112A-02
06/13/'13		6/13/13	Unit	mm	 Shin Chin Industrial Co., Ltd.		Rev. 2