




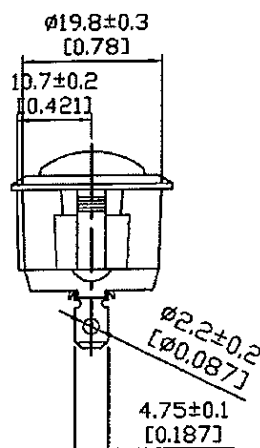
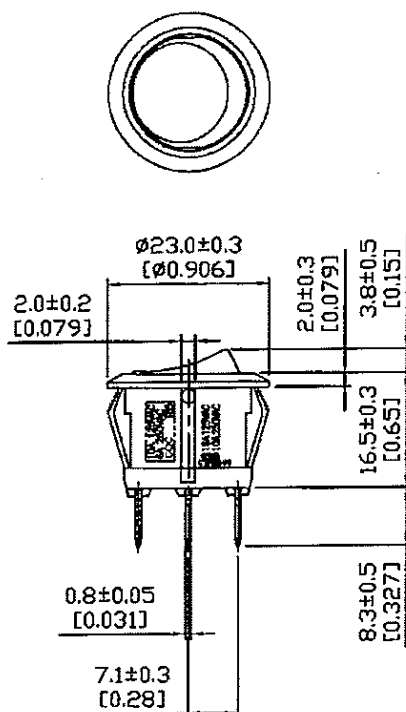


Rating	16A 125VAC, 10A 250VAC 	Mounting Hole 
	10A 125VAC, 6A 250VAC CQC	
	10(4)A 250V~ 	
	20A 12V DC	
Contact Resistance	50m ohm Max.	
Insulation Resistance	DC 500V 100M ohm Min.	
Dielectric Strength	AC 1500V 1 minute	
Operation Temperature	-25°C~85°C	
Switch Function	3P SPDT ON-ON	

Circuit Diagram



*MATERIAL—Frame: Nylon 66
Actuator: Nylon 66
Terminals: C1100
Contacts: AgSnO2InO3

*Snap-in mounting, easy to install Switch into Panel.

*.Black body, Black rocker.

C8\客戶圖面\DELICITY\R13-112C-02(7500021)(1821150)_1

04/23/'10	曹盈芳	為了整合安規取消CSA,追加ENEC\VED10的溫度刻字由T85提升25T85,追加CQC,10A125VAC,6A250VAC,T85刻字				△
Date	Name	Description				△
Drawn	Checked	Approved	SCI BOM NO.	1821150	Model Name	ROCKER SWITCH
曹盈芳			Delcity No.	7500021	Model No.	R13-112C-02
04/23/'10			Unit	mm/(inch)	SHIN CHIN INDUSTRIAL CO., LTD.	
						REV. 1