		Mounting Hole	Circuit Diagram
Rating	6A 125V AC/3A 250V AC		
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1000V 1 minute		
Operation Temperature	-20°C~85°C		
Switch Function	3P SPDT ON-ON		

Material:
Frame: Black, PF
Toggle: Copper Alloy, Ni Plated
Terminals: Copper Alloy

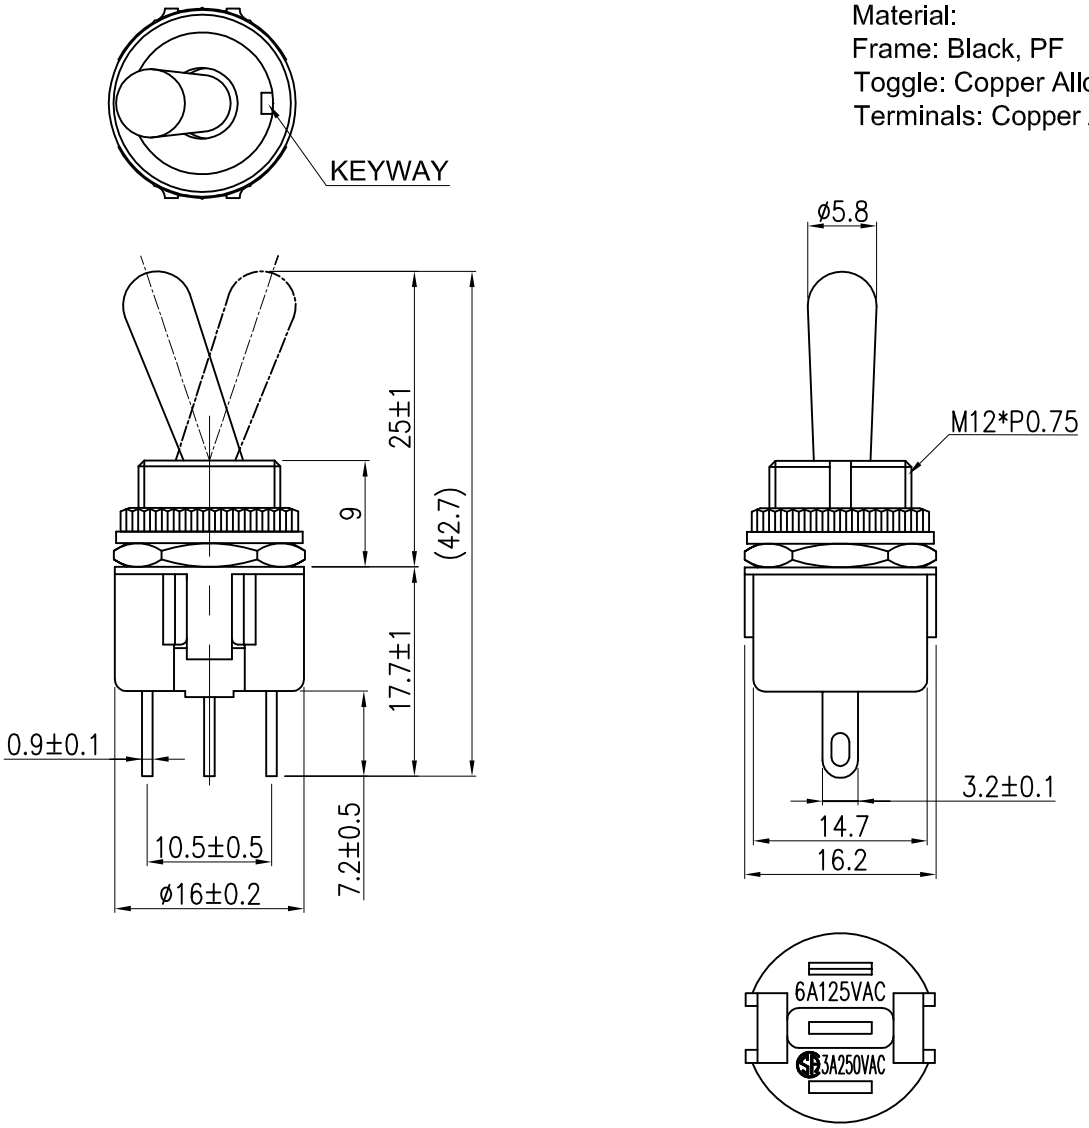

1、Tolerances Unless Otherwise Specified ±0.3

							△
							△
Date	Name	Description					No.
Drawn	Checked	Approved	SCI BOM No.	1810178	Model Name	TOGGLE SWITCH	
邱 權	Ruby	李元生	Customer No.		Model No.	R13-37C-05	Rev. 0
02/19/'11	03/17/'11	03/23/'11	Unit	mm	Shin Chin Industrial Co., Ltd.		