




Rating	3A 125V AC 1.5A 250V AC	C  US	Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm Max.			
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1000V 1 minute			
Switch Function	2P SPST OFF-(ON)			






Material:

Housing: Black, Nylon#66

Button: Red/Black/Yellow/Green, Nylon#66

Bottom Cover: Black, PBT+30%GF

Terminals: Copper Alloy

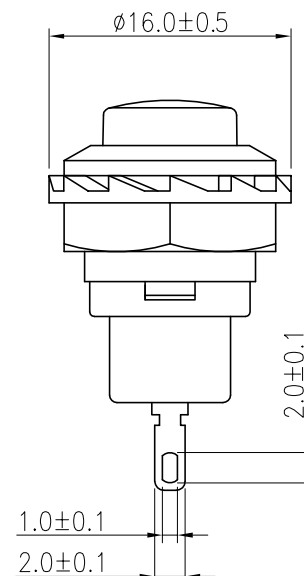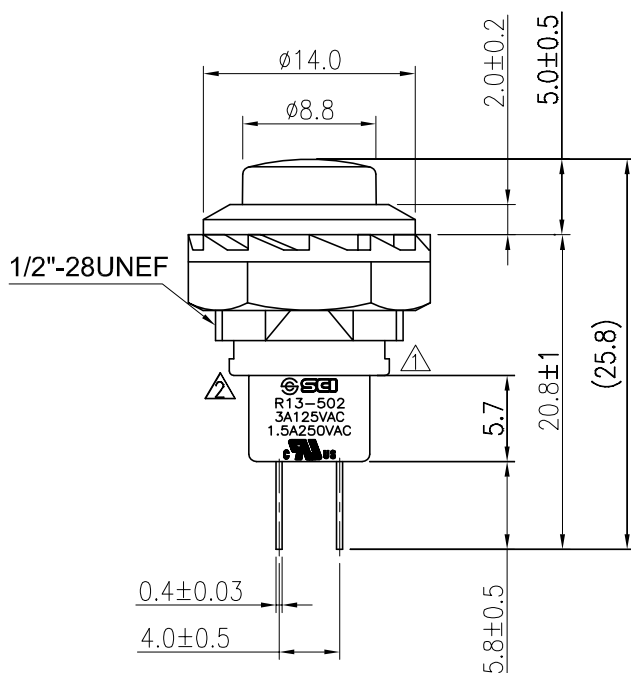

Tolerances Unless Otherwise Specified ± 0.3

C8/R13-502/R13-502A

07/30/'12	柳新強	增加SCI LOGO					
11/09/'09	李日紅	本體與底座改卡扣式新結構設計					
Date	Name	Description					No.
Drawn	Checked	Approved	SCI BOM No.		Model Name	PUSH SWITCH	
柳新強	徐洲迎	李元生	Customer No.		Model No.	R13-502A-05	Rev.
07/30/'12	07/31/'12	07/31/'12	Unit	mm	 Shin Chin Industrial Co., Ltd.		2