





Rating	10A 125V AC 1/8HP, 6A 250V AC 1/3HP 10A 125V AC, 6A 250V AC 6A(2) 250V~	Mounting Hole		Circuit Diagram	
Contact Resistance	50m ohm Max.				
Insulation Resistance	DC 500V 100M ohm Min.				
Dielectric Strength	AC 1500V 1 minute				
Operation Temperature	-25°C~85°C				
Switch Function	2P SPST OFF-(ON)	Thickness 0.75~1.25 1.25~2 2~3	X 19.2-0.1 19.4-0.1 19.8-0.1	Y 13+0.1 13+0.1 13+0.1	

Material:
Frame: Black, Nylon#66
Actuator: Red, Nylon#66

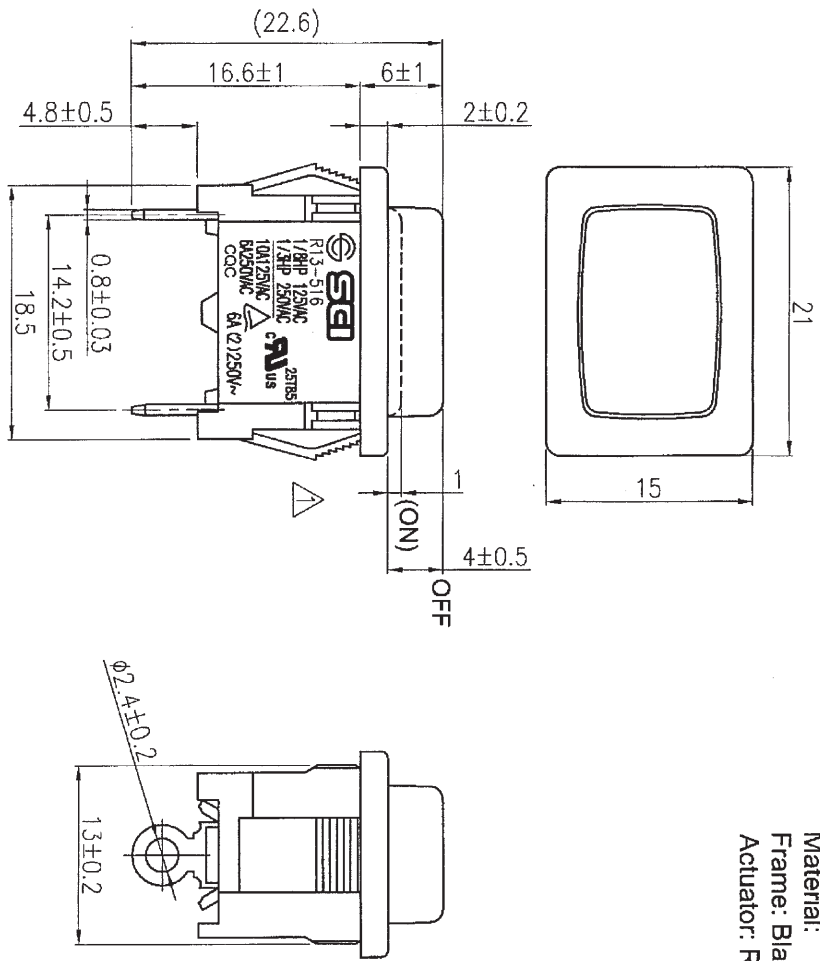

Tolerances Unless Otherwise Specified ±0.3

10/08/12	柳新強	增加SCI LOGO及CQC刻字				
Date	Name	Description	No.			
Drawn	Checked	Approved	SCI BOM No.	1830460	Model Name	PUSH SWITCH
柳新強	符子明	Simon	Customer No.		Model No.	R13-516A-12
10/08/12	10/8-12	10/8-12	Unit	mm		Rev. 1
					Shin Chin Industrial Co., Ltd.	