
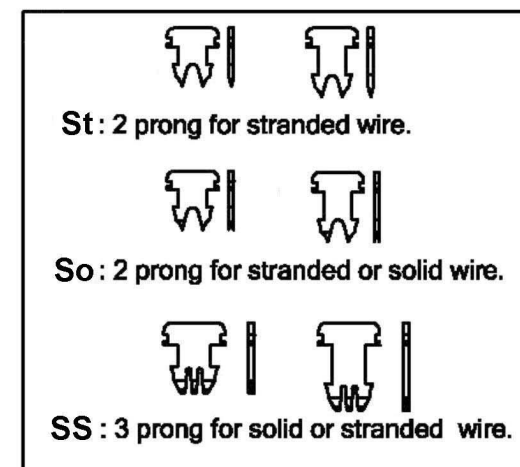
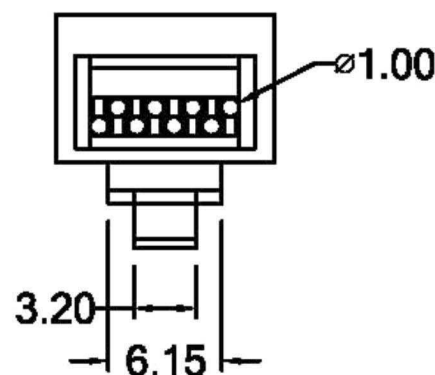
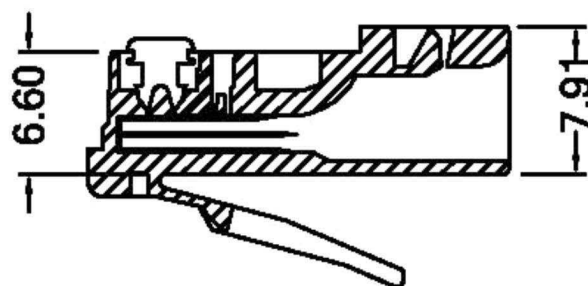
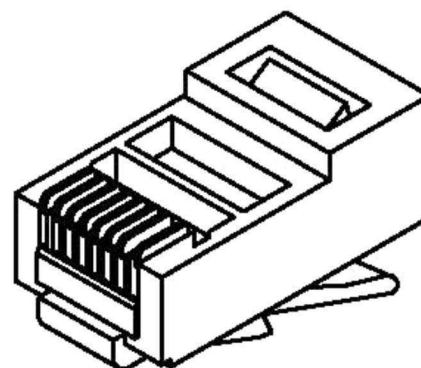


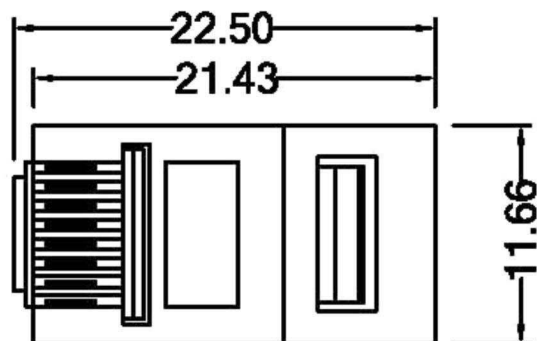

MATERIAL & FINISH

Body: Polycarbonate, UL94V-2, clean

Terminal: 0.35 mm thickness copper alloy, underplated with 100 uin Nickel, and plated with selective Gold in contact region and gold flash on remainder of terminal.

SPECIFICATION:

Voltage : 125 VAC

Current : 1.5 A

Contact Resistance : 30 milliohms max.

Insulation Resistance : 500 megaohms min.

Dielectric Withstanding Voltage : 1000 VAC

***Durability: 1000 times**

RoHS
Compliant

T&T Connection System Co., Ltd.

APPD.
核准 HELEN

DWG.
製圖 ABBY

DATE 制表日
2013/04/22

SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1

TOLERANCE
容許公差
.0 ± 0.1
.00 ±
ANG. ±

SIZE
紙張尺寸 A 4

REV.
版次 B

PART NAME 品名

8P8C MODULAR JACK
FOR CAT6 CABLE

PART NO.

料號 RJ45-8P8C-CAT6-xx