


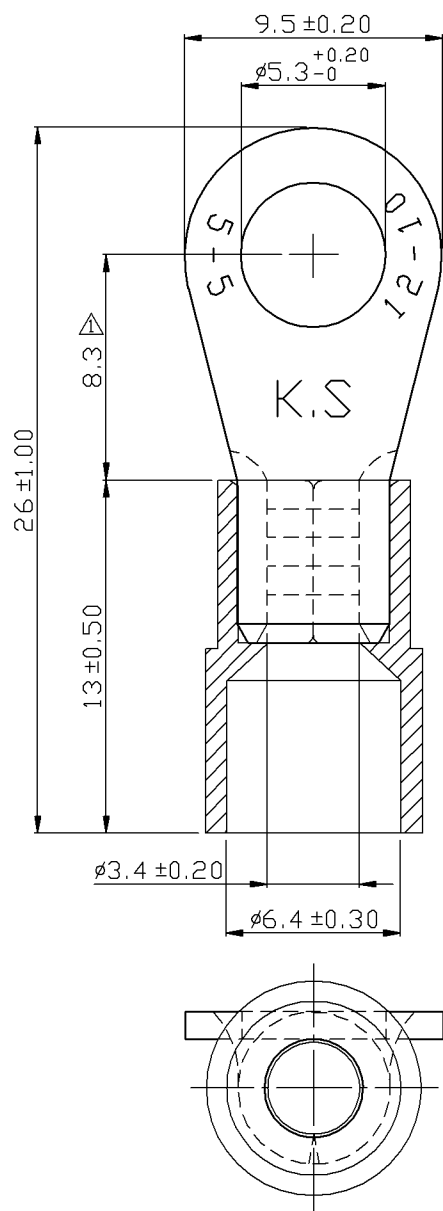

| REV | DESCRIPTION | DATE           |
|-----|-------------|----------------|
| △   | RDK-97127   | 謝婉如 2009/10/16 |
| △   | RDK-98020   | 謝婉如 2009/10/16 |

NOTE:

1. MAXIMUM ELECTRIC CURRENT : 

|        |    |    |  |
|--------|----|----|--|
| A.W.G. | 12 | 10 |  |
| AMP.   | 35 | 50 |  |
2. MAXIMUM ELECTRICAL RATING : 125°C 600 VOLTS MAX.
3. INSULATION MATERIAL : PC
4. INSULATION COLOR : YELLOW
5. TERMINAL MATERIAL : COPPER
6. WIRE RANGE : 12-10 A.W.G.( 4 - 6 mm<sup>2</sup>)
7. TERMINAL SURFACE TREATMENT : TIN PLATED
8. TERMINAL THICKNESS : 1.00 mm

| Tolerance Unless<br>Otherwise Specified |      |      |         |
|-----------------------------------------|------|------|---------|
| 0                                       | >    | mm ± | ANGLE   |
| >                                       | mm ± | 0°   | ° REF ± |
| >                                       | mm ± | °    | ° ±     |
| >                                       | mm ± | °    | ° ±     |

|          |                                |          |       |         |         |     |  |
|----------|--------------------------------|----------|-------|---------|---------|-----|--|
| NAME     | PC-INSULATED<br>RING TERMINALS |          |       |         | UNIT    | mm  |  |
| PART NO. | RN15-5                         | MATERIAL | ----- | APPROVE |         |     |  |
| NUMBER   | KA-961155-C                    | SCALE    | SHEET | PAGE    | CHECKED |     |  |
| DATE     | 2007/11/16                     | 4/1      | 1-2   | 10F2    | DRAWN   | 吳金賢 |  |

**KST. K.S. TERMINALS INC.**