


VINYL-INSULATED (EASY ENTRY)
RING TERMINALS

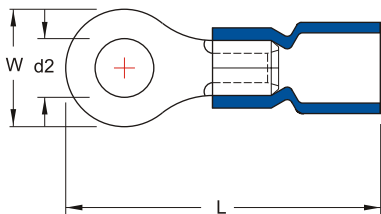

MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16	14
AMP.	9	12	17	18	30

MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.

INSULATION MATERIAL : VINYL

TERMINAL MATERIAL : COPPER


A.W.G.	BRAZED SEAM	BUTTED SEAM	d2 mm(inch)	W mm(inch)	L mm(inch)	COLOR
22-16	RVEB1-3.2	RVE1-3.2	3.2 (.126)	5.5 (.217)	18.7 (.736)	RED
	RVEBS1-3.7	RVES1-3.7	3.7 (.146)			
	RVEBM1-3.7	RVEM1-3.7	3.7 (.146)	6.6 (.260)	20.6 (.811)	
	RVEBL1-3.7	RVEL1-3.7	3.7 (.146)	8.0 (.315)	22.0 (.866)	
	RVEBS1-4	RVES1-4	4.3 (.169)	6.6 (.260)	20.6 (.811)	
	RVEBL1-4	RVEL1-4	4.3 (.169)	8.0 (.315)	22.0 (.866)	
	RVEB1-5	RVE1-5	5.3 (.209)			
	RVEBL1-5	RVEL1-5	5.3 (.209)	11.6 (.457)	28.0 (1.102)	
	RVEB1-6	RVE1-6	6.4 (.252)			
	RVEB1-8	RVE1-8	8.4 (.331)			
	RVEB1-10	RVE1-10	10.5 (.413)	13.6 (.535)	31.7 (1.248)	
	RVEB1-12	RVE1-12	13.0 (.512)	19.6 (.772)	36.6 (1.441)	
	RVEB1-14	RVE1-14	15.0 (.591)	27.0 (1.063)	45.5 (1.791)	
	RVEB1-16	RVE1-16	17.0 (.669)			
RVEB1-20	RVE1-20	21.0 (.827)				
16-14	RVEB2-3.2	RVE2-3.2	3.2 (.126)	6.6 (.260)	19.3 (.760)	BLUE
	RVEBS2-3.7	RVES2-3.7	3.7 (.146)		20.9 (.823)	
	RVEBM2-3.7	RVEM2-3.7	3.7 (.146)			
	RVEBL2-3.7	RVEL2-3.7	3.7 (.146)	8.5 (.335)	23.3 (.917)	
	RVEBS2-4	RVES2-4	4.3 (.169)	6.6 (.260)	20.9 (.823)	
	RVEBL2-4	RVEL2-4	4.3 (.169)	8.5 (.335)	23.3 (.917)	
	RVEBS2-5	RVES2-5	5.3 (.209)			
	RVEBL2-5	RVEL2-5	5.3 (.209)	9.5 (.374)	23.3 (.917)	
	RVEB2-6	RVE2-6	6.4 (.252)	12.0 (.472)	28.3 (1.114)	
	RVEB2-8	RVE2-8	8.4 (.331)			
	RVEB2-10	RVE2-10	10.5 (.413)	13.6 (.535)	32.0 (1.260)	
	RVEB2-12	RVE2-12	13.0 (.512)	19.2 (.756)	36.9 (1.453)	
	RVEB2-14	RVE2-14	15.0 (.591)	27.0 (1.063)	45.8 (1.803)	
	RVEB2-16	RVE2-16	17.0 (.669)			
RVEB2-20	RVE2-20	21.0 (.827)				

UL cUL ALL LISTED

INSULATED COPPER TERMINALS



**VINYL-INSULATED (EASY ENTRY)
RING TERMINALS**

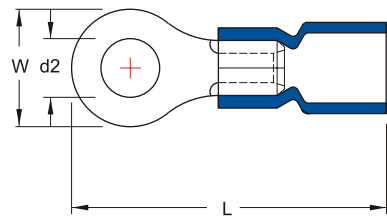

MAXIMUM ELECTRIC CURRENT :

A.W.G.	12	10
AMP.	35	50

MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.

INSULATION MATERIAL : VINYL

TERMINAL MATERIAL : COPPER


A.W.G.	BRAZED SEAM	BUTTED SEAM	d2 mm(inch)	W mm(inch)	L mm(inch)	COLOR
12-10	RVEB5-3.7	RVE5-3.7	3.7 (.146)	7.2 (.283)	23.8 (.937)	YELLOW
	RVEBS5-4	RVES5-4	4.3 (.169)			
	RVEBL5-4	RVEL5-4	4.3 (.169)	9.5 (.374)	27.1 (1.067)	
	RVEB5-5	RVE5-5	5.3 (.209)			
	RVEB5-6	RVE5-6	6.4 (.252)	12.0 (.472)	30.6 (1.205)	
	RVEBM5-6	RVEM5-6	6.4 (.252)			
	RVEB5-8	RVE5-8	8.4 (.331)	15.0 (.591)	35.1 (1.382)	
	RVEB5-10	RVE5-10	10.5 (.413)			
	RVEB5-12	RVE5-12	13.0 (.512)	19.2 (.756)	39.7 (1.563)	
	RVEB5-14	RVE5-14	15.0 (.591)			
	RVEB5-16	RVE5-16	17.0 (.669)	32.0 (1.260)	55.3 (2.177)	
	RVEB5-20	RVE5-20	21.0 (.827)			

ALL LISTED

INSULATED COPPER TERMINALS



**VINYL-INSULATED (EASY ENTRY)
MULTIPLE-STUD RING TERMINALS**

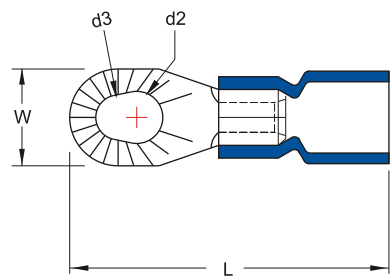

MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16	14	12	10
AMP.	9	12	17	18	30	35	50

MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.

INSULATION MATERIAL : VINYL

TERMINAL MATERIAL : COPPER

A.W.G.	ITEM NO.	ITEM NO.	d3-d2 mm(inch)	W mm(inch)	L mm(inch)	COLOR
22-16	MSRVEB1-3753	MSRVE1-3753	3.7 (.146)	8.6 (.339)	25.7 (1.102)	RED
			4.3 (.169)			
			5.3 (.209)			
16-14	MSRVEB2-3753	MSRVE2-3753	3.7 (.146)	8.6 (.339)	26.0 (1.024)	BLUE
			4.3 (.169)			
			5.3 (.209)			
12-10	MSRVEB5-3753	MSRVE5-3753	3.7 (.146)	9.9 (.390)	30.6 (1.205)	YELLOW
			4.3 (.169)			
			5.3 (.209)			

ALL LISTED