

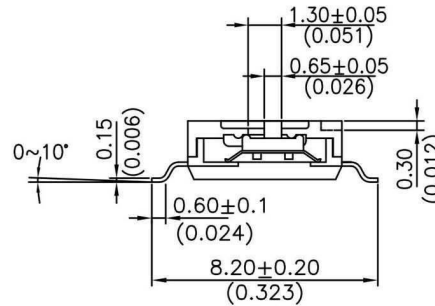
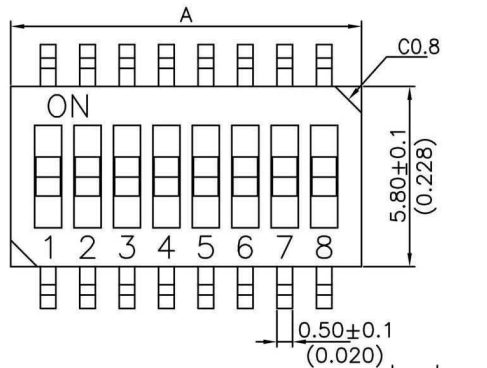



DIMENSION:(UNIT:mm/inches)

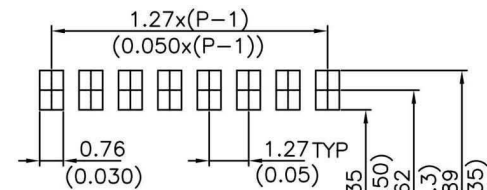


No.ofPOS	DIM.A	DIM.B
02	3.68(0.145)	1.27(0.050)
04	6.22(0.245)	3.81(0.150)
06	8.76(0.345)	6.35(0.250)
08	11.30(0.445)	8.89(0.350)
10	13.84(0.545)	11.43(0.450)

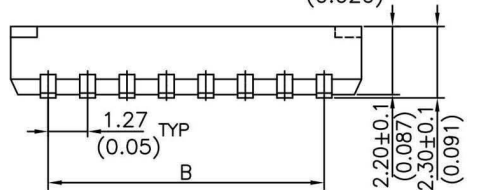

P.C.B. LAYOUT



CIRCUIT DIAGRAM

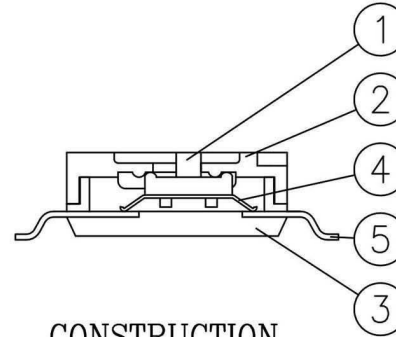

CONSTRUCTION

ITEM	DES	MATERIALS	TREATMENT
1	ACTUATOR	UL94V-0 NYLON THERMOPLASTIC	MOLDED WHITE
2	COVER	UL94V-0 NYLON THERMOPLASTIC	MOLDED BLACK
3	BASE	UL94V-0 NYLON THERMOPLASTIC	MOLDED BLACK
4	CONTACT	COPPER	GOLD PLATED
5	TERMINAL	BRASS	GOLD PLATED

RoHS Compliant		T&T Connection System Co., Ltd.	
APPD. 核准 BETTY	SCALE 比例 参考	TOLERANCE 容許公差 0-4 ±0.05 4-16 ±0.1 16-50 ±0.15	PART NAME 品名 SMT DIP SWITCH (TAPE SEALED)(1.27mm)
DWG. 製圖 KAREN	UNIT 單位 MM	SIZE 紙張尺寸 A 4	PART NO. 料號 SDIP-xxSMT
DATE 制表日 2013/04/15	PAGE 張數 1 OF 1	REV. 版次 A	