
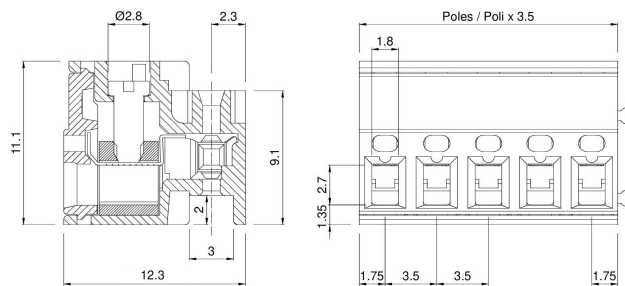


SHCS__-3,5-Q

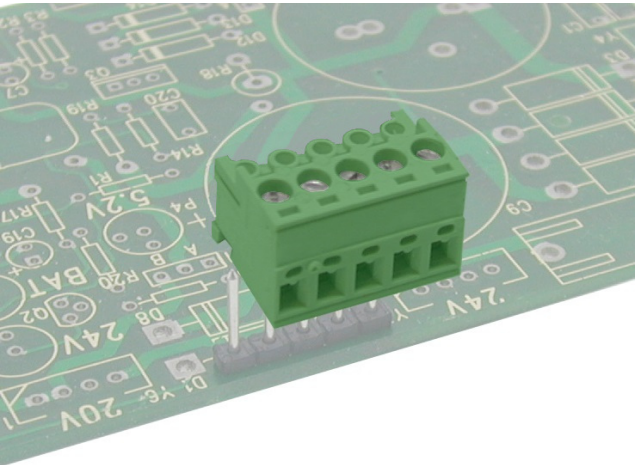

GENERAL INFORMATION

pitch	3,5 mm
Height	11.1 mm
Depth	12.3 mm
Dimensional class	Bassa
Wire section	2,5 mm² / 14 AWG
Clamp opening size	1,8 x 2,7 mm
Wire stripping	max 6,5 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	15 A
Voltage	250 V
impulse voltage	2.5 kV

MECHANICAL CHARACTERISTICS

Screw	M2
Recommended torque	0,25 Nm / 2,3 in.lbs

APPROVALS DATA



Current	-	-	-
Voltage	-	-	-
Wire section	-	-	-
Torque	-	-	-
FILE	-	-	-

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Copper alloy
SCIP Number	8f3ed649-5dcd-4973-a9c9-d71b7f8f530d

COLOURS

Standard	On request
----------	------------



POLES

02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24

NAME

SHCS02-3,5-Q
SHCS03-3,5-Q
SHCS04-3,5-Q
SHCS05-3,5-Q
SHCS06-3,5-Q
SHCS07-3,5-Q
SHCS08-3,5-Q
SHCS09-3,5-Q
SHCS10-3,5-Q
SHCS11-3,5-Q
SHCS12-3,5-Q
SHCS13-3,5-Q
SHCS14-3,5-Q
SHCS15-3,5-Q
SHCS16-3,5-Q
SHCS17-3,5-Q
SHCS18-3,5-Q
SHCS19-3,5-Q
SHCS20-3,5-Q
SHCS21-3,5-Q
SHCS22-3,5-Q
SHCS23-3,5-Q
SHCS24-3,5-Q

3D FILE

File available
File available
File available
File available
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product
File not available for this product