
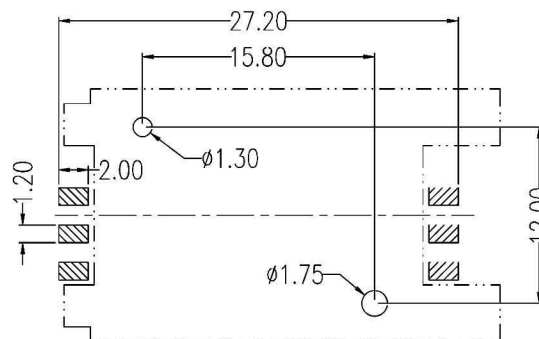
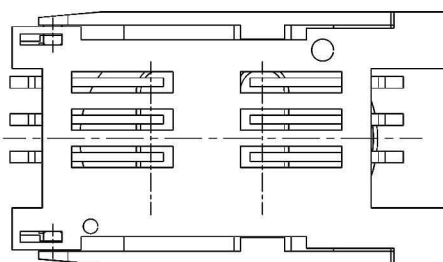


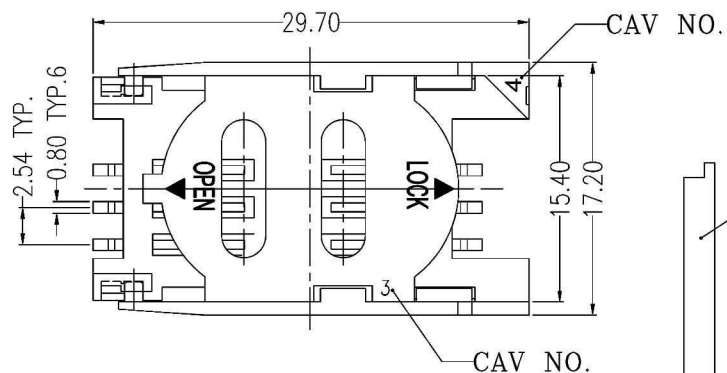

RECOMMEND P.C.B. LAYOUT
TOP VIEW

NOTES

*Material:

- 1.Body: PPS UL 94V-0 Rated, Color:Black;
- 2.Cover: PPS UL 94V-0 Rated, Color:Black;
- 3.Contact: Phosphor Bronze;
- 4.Contact Plating: Gold Plating Over Nickel
on Contact Area, Tin Plating
on Solder Tail.

*Specification:

- 1.Current Rating: 0.5 AMP. Max.;
- 2.Dielectric Withstanding Voltage:
500V AC R.M.S For One Minute;
- 3.Insulation Resistance: 1000 M Ohms Min.
AT 500V AC;
- 4.Contact Resistance: 30 M Ohms Max.;
- 5.Operating Temperature: -25°C to +85°C;
- 6.Processing Temp: 230°C for 30~60 Seconds Max.;
- 7.Durability: 5000 Cycles.

RoHS Compliant

**RoHS
Compliant**

T&T Connection System Co., Ltd.

APPD.
核准 Megan

DWG.
製圖 Hedy

DATE 制表日
2012/02/21



SCALE
比例 參考

UNIT
單位 MM

PAGE
張數 1 / 1

TOLERANCES ARE
X ± 0.38
XX ± 0.25
XXX ± 0.20
AWG

SIZE.
紙張尺寸 A 4

REV.
版次 B

PART NAME 品名

**HINGED COVER SIM CARD
6P BLOCK TYPE**

PART NO.

料號 **SIM-SL-06P-H**