

SCHEMATIC DIAGRAM

SLIDE SWITCH: MODEL SL13

RATING: 1A 125VDC





CIRCUIT: DOUBLE POLES TRIPLE THROW

CONTACT RESISTANCE: 20mΩ (MAX)

DIELECTRIC STRENGTH: 1000VAC FOR 1 MINUTE


CYCLE: 100,000.

OPERATION FORCE: 300±200g

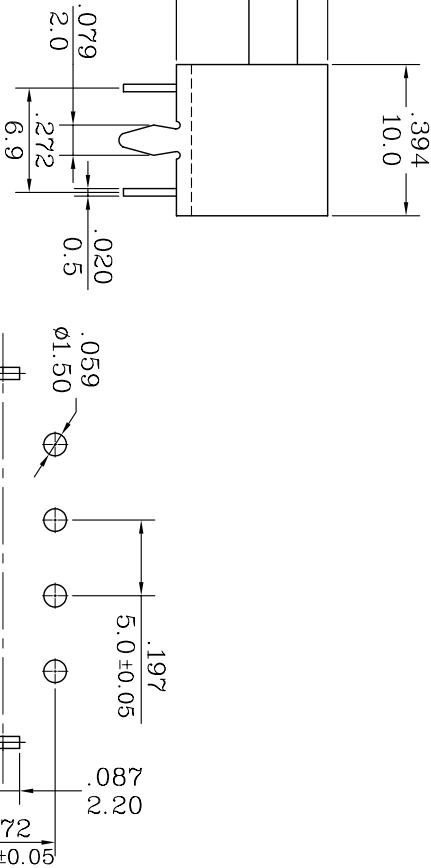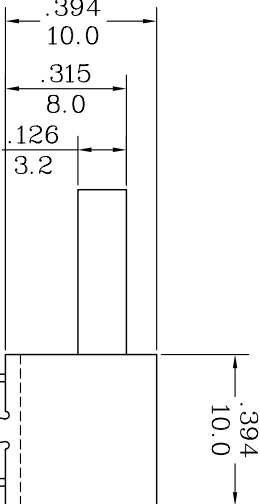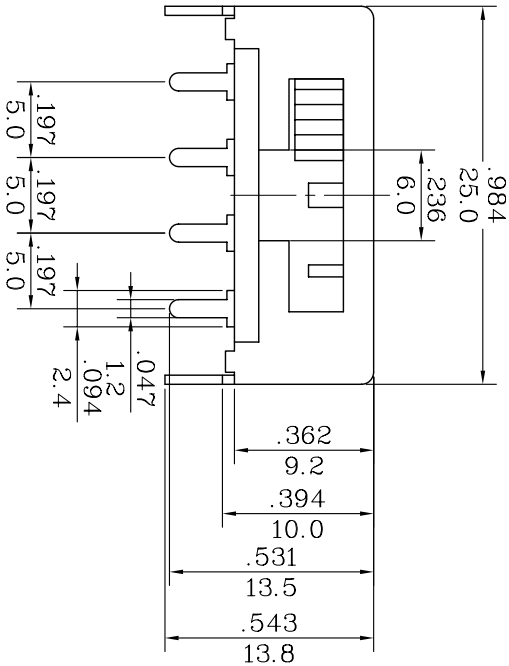

P.C.BOARD HOLE

NOTE:TOLERANCES UNLESS OTHERWISE SPECIFIED: $\pm \frac{.12}{0.3}$ (in/mm)

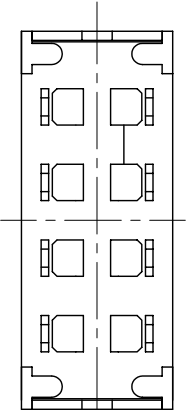

修正 REVISION	說明 DESCRIPTION	核准 APPROVAL BY	公差 TOLERANCES	設計 DESIGNED BY	日期 DATE	圖號 DRAWING NO	版次 VER	處理 FINISH
△			繪圖 DRAWN BY	馮紅茵	2003.03.05	SL13-213C		
△			核對 CHECKED BY	馮紅茵				
△			發圖章	2003.05.15				