

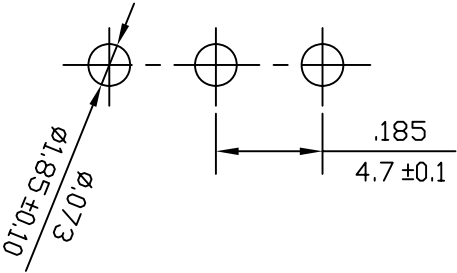


SPECIFICATION MODEL: "SL19" SERIES

6A 120VAC, 3A 250VAC (UL)
6A 28VAC (UL)
INITIAL CONTACT RESISTANCE : 10mΩ (max)
INSULATION RESISTANCE: 500VDC 100MΩ (min)
DIELECTRIC STRENGTH: 1,000VAC FOR 1 MINUTE
LIFE CYCLE : 30,000 CYCLES
TEMPERATURE RANGE: -20°C TO 85°C
CASE: DIALYL PHTHALATE (DAP)
HOUSING: STAINLESS STEEL
SLIDE HANDLE: NYLON66
CONTACT: COIN SILVER, SILVER PLATED
CENTER CONTACT & TERMINALS : BRASS SILVER PLATED

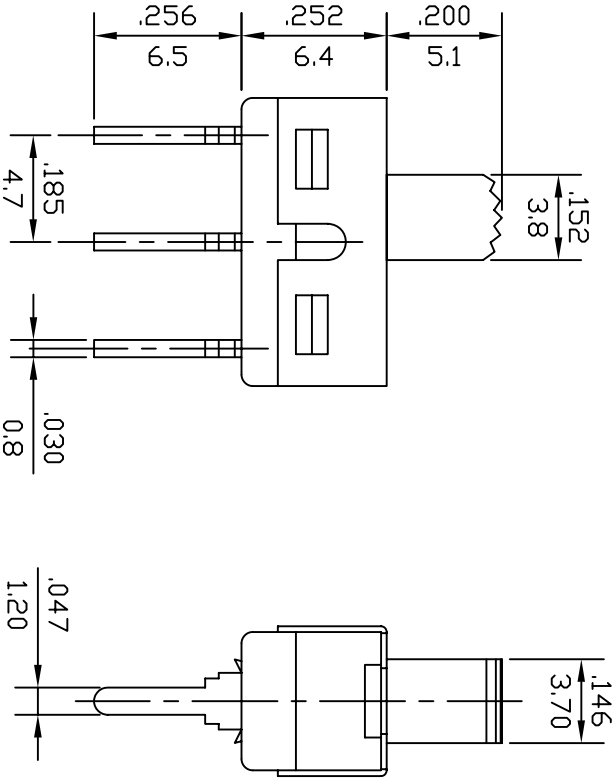

MOUNTING HOLE

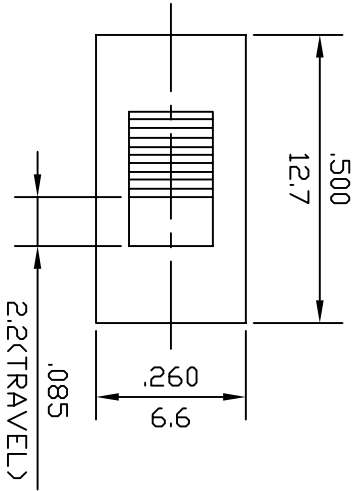

REVISION	DESCRIPTION	REVISED BY	TOLERANCES .X±0.3		ANGLE $\frac{1}{2}^\circ$	ϕ	UNIT	PART NAME	SL19 SPEC DRAWING	DWG NO
△			DRAWN BY	吳美玉	DESIGNED BY	ERIC	SCALE	3/1		WS0205A
△			CHECKED BY		APPROVED BY		DATE			
△	2005.12.14 換新圖框,重新出圖	吳美玉					2003.12.24	PART NO	SL19-121	