

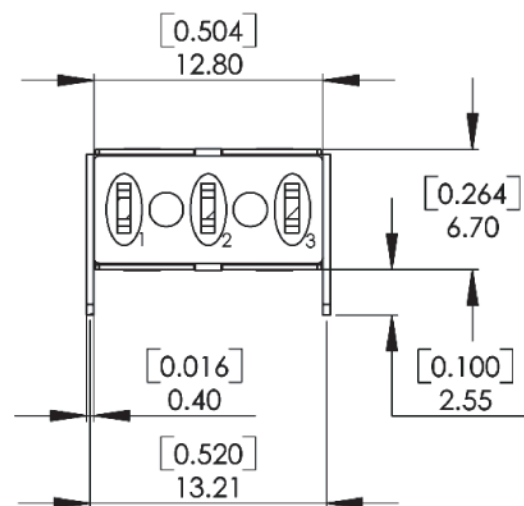


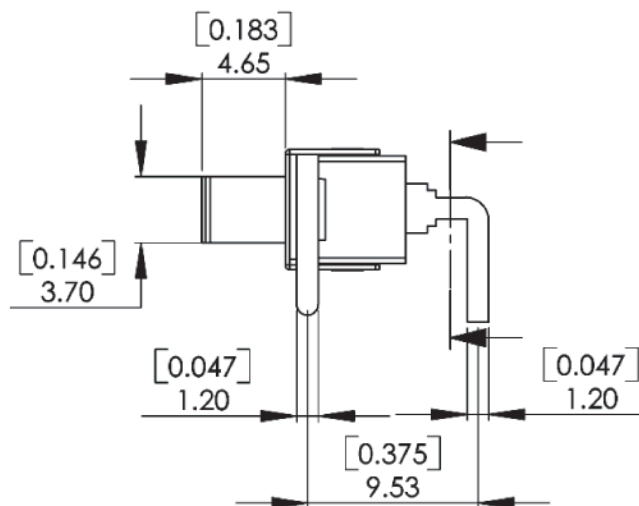

TOLERANCE	
XX.	± 0.5
X.	± 0.2
.XX	± 0.2

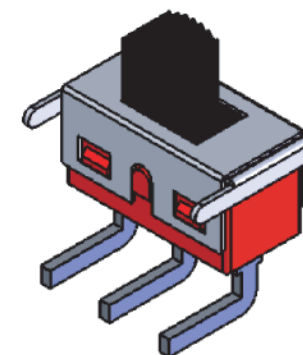

SPECIFICATIONS:

CONTACT RATING : 6 AMPS @ 120 V AC or 28 V DC.

3AMPS @250 V AC or 0.4 AMPS @ 20V AC or DC

ELECTRICAL LIFE : 30,000 make-and-break cycles at full load.

CONTACT RESISTANCE : 10 mΩ max. initial @ 2-4 V DC.

100 mA, for both silver and gold plated contacts.

INSULATION RESISTANCE : 1,000 MΩ min.

DIELECTRIC STRENGTH : 1,000 V RMS @ sea level.

OPERATING TEMPERATURE : -30 °C to 130 °C

MATERIALS:

CASE : Diallyl phthalate (DAP)(UL-94V-0).

ACTUATOR : Nylon.


BUSHING : Brass, nickel plated.

HOUSING : Stainless steel.

TERMINAL/CONTACT : Brass, with silver or gold plated.

or gold over silver

SWITCH SUPPORT : Brass, tin plated.

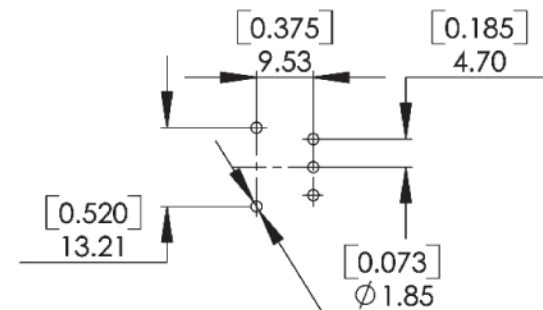

P.C. MOUNTING

REVISION	DESCRIPTION	REVISED BY	TOLERANCES .X .XX		ANGLE $\frac{1}{2}^\circ$				UNIT	mm	PART NAME	SL19 SPEC DRAWING	DWG NO
			DRAWN BY	Alice	DESIGNED BY	Eric	SCALE						PART NO
			CHECKED BY		APPROVED BY		DATE	2006.01.25					
 2006.01.25	換新圖框, 重新出圖	吳美玉											