
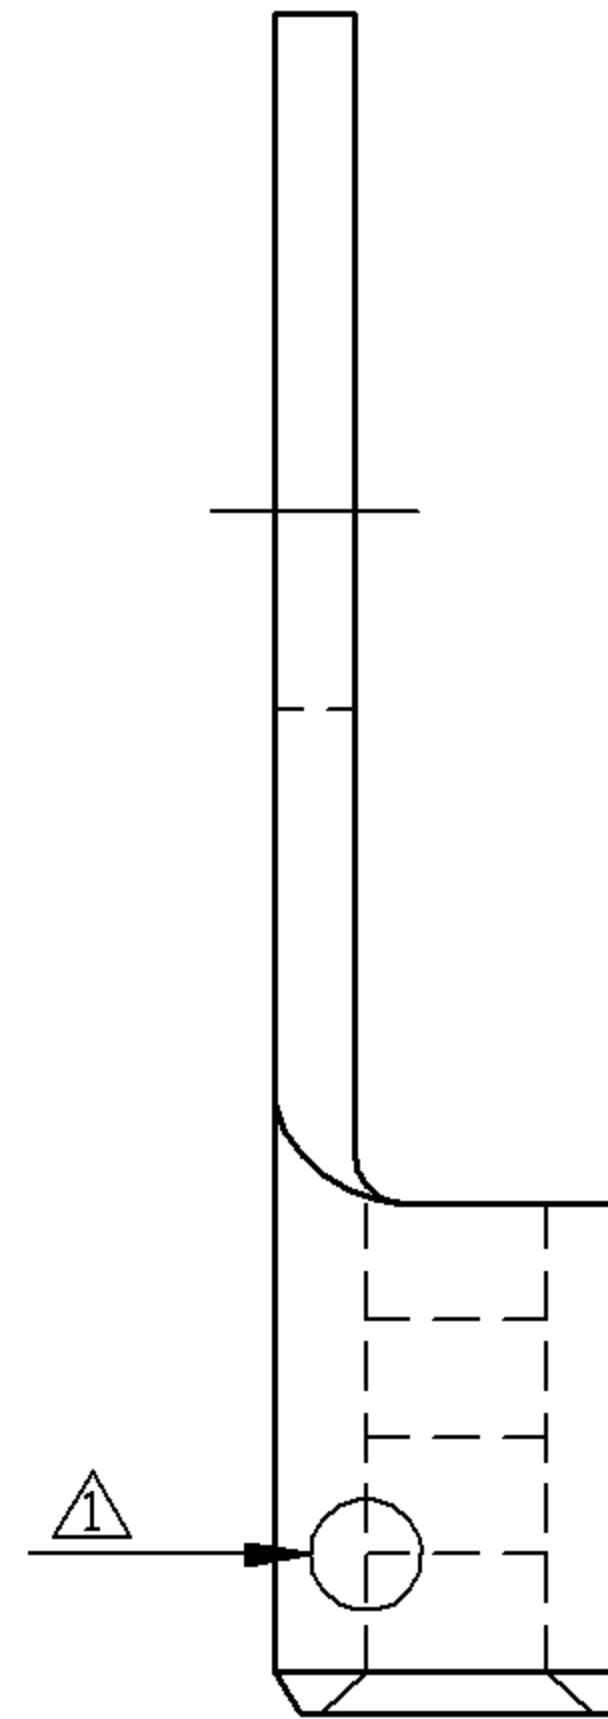


REV	DESCRIPTION	DATE
△	RDK-96036	張馨尹 2007/12/21
△	RDK-97127	謝婉如 2008/09/19
△	RDK-98020	張馨尹 2009/09/02

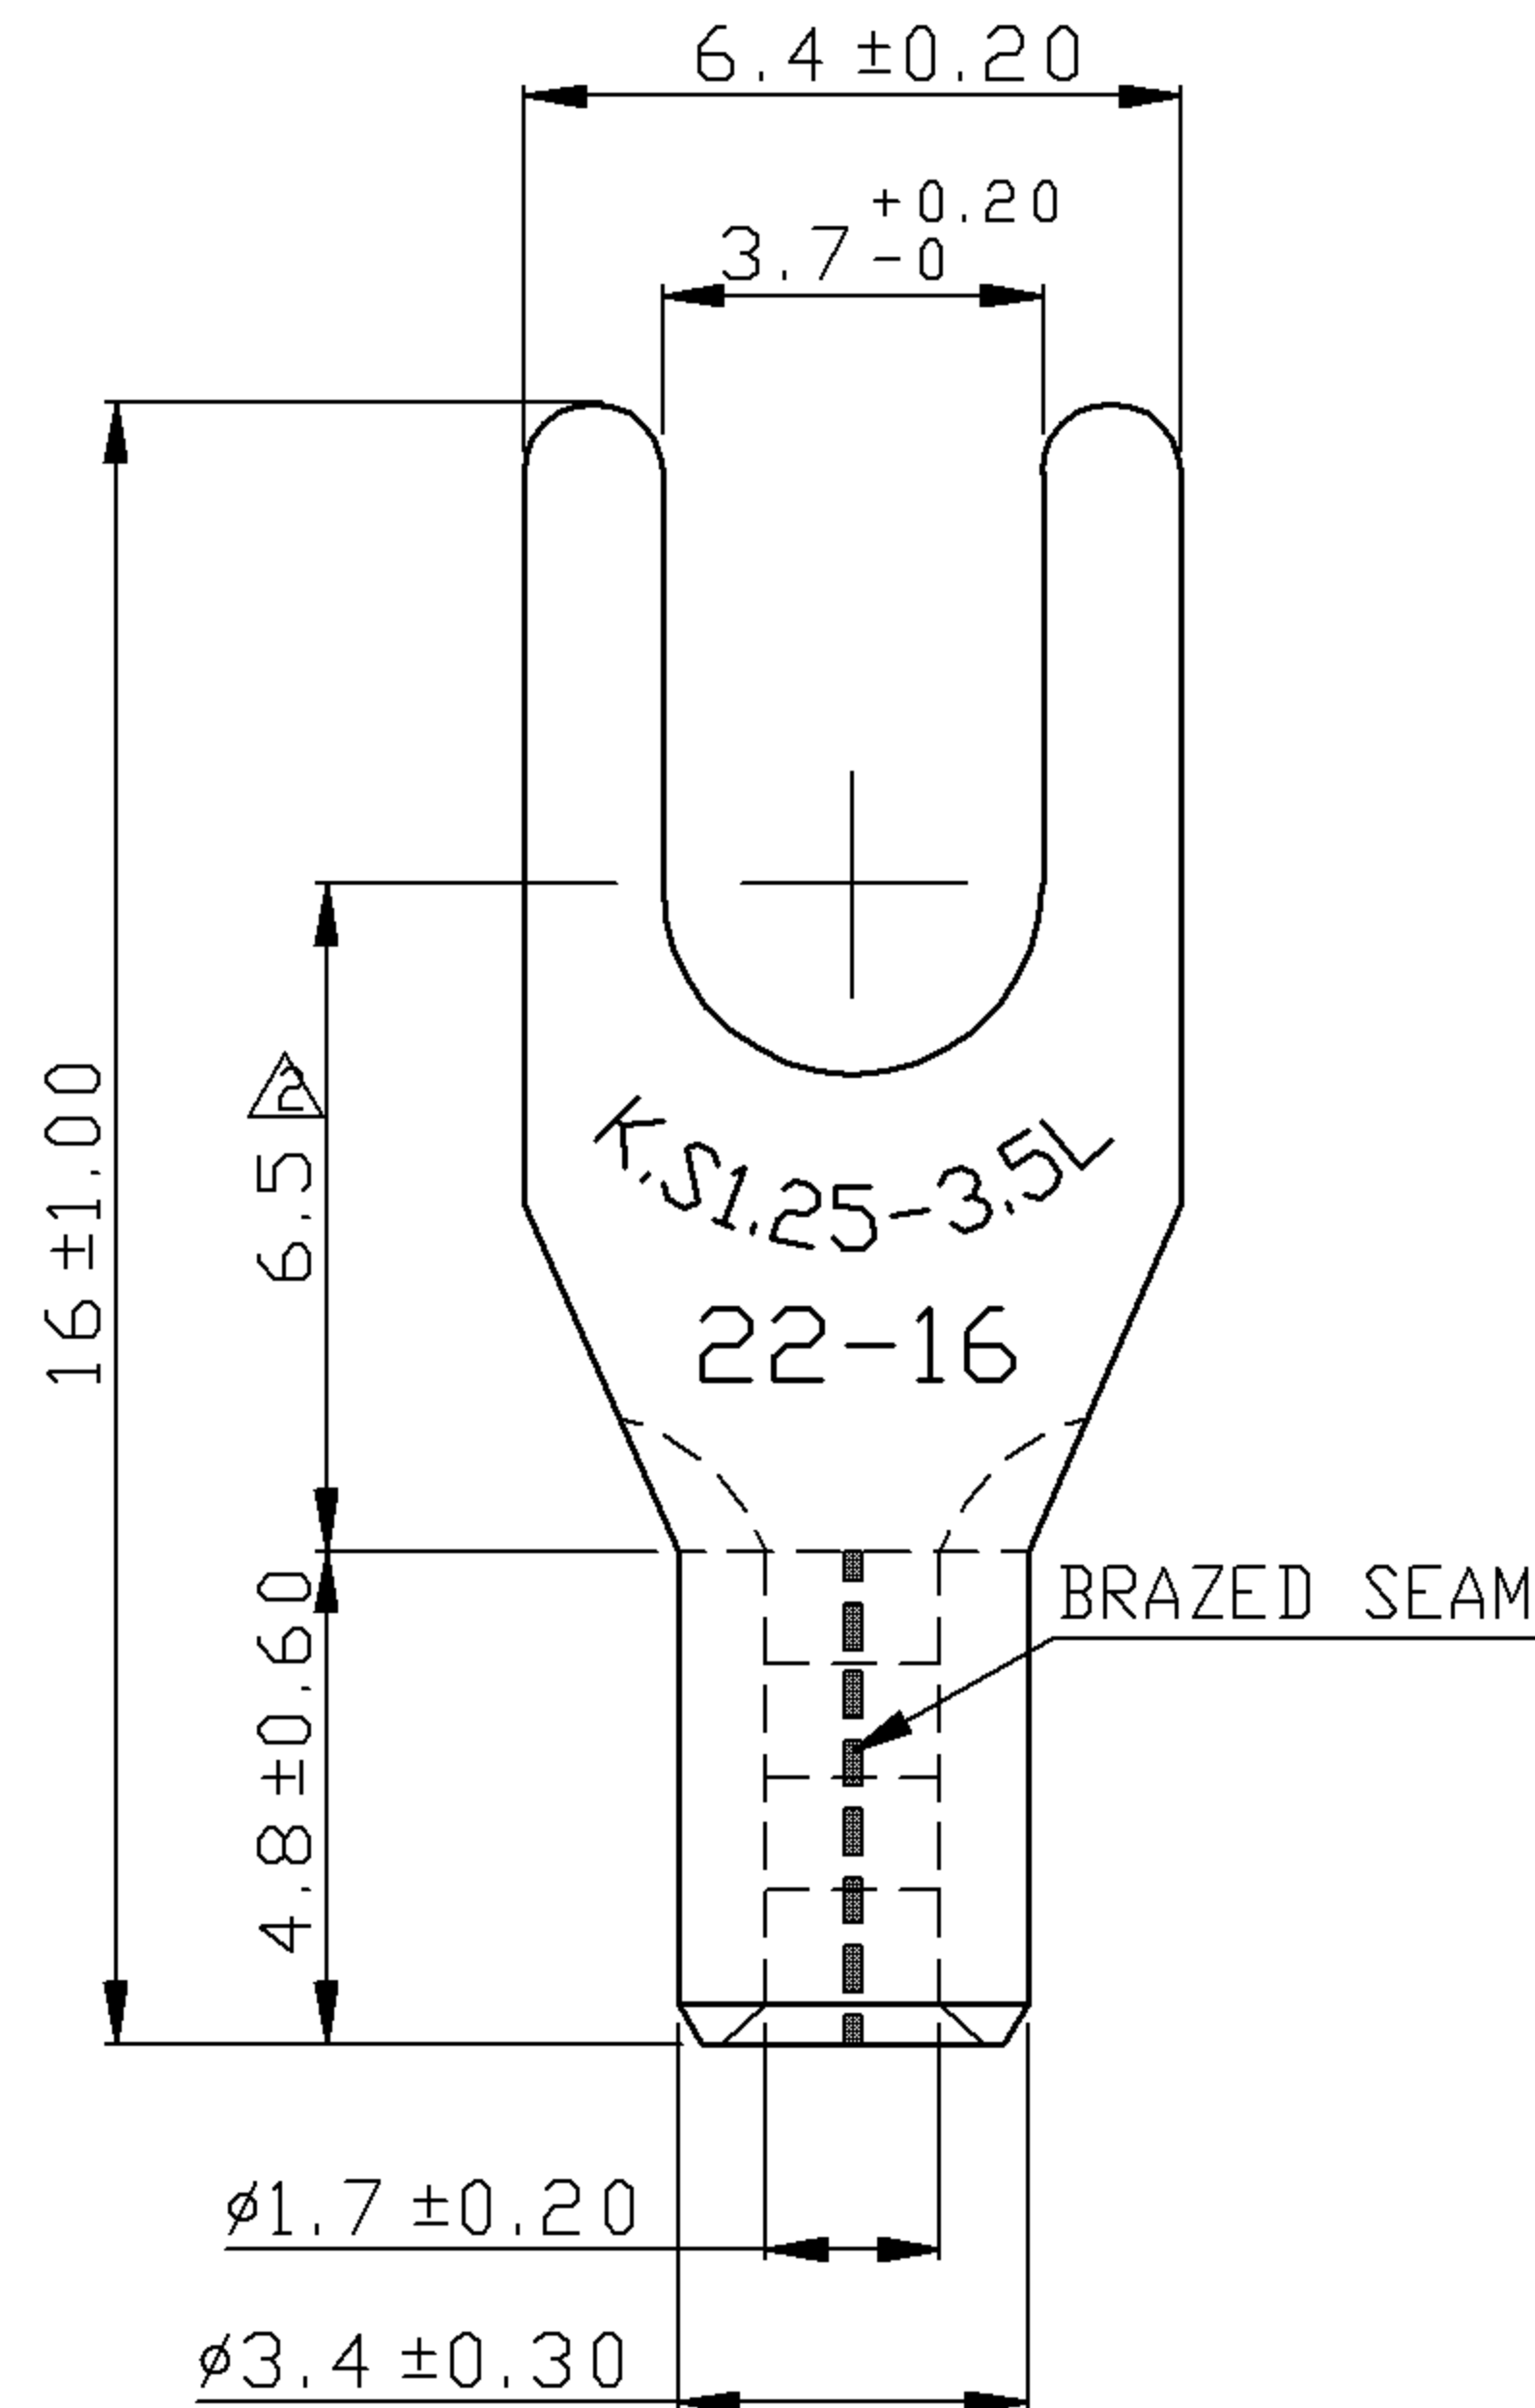

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16
AMP.	9	12	17	18
2. WIRE RANGE : 22-16 A.W.G. (0.5-1.5 mm²)
3. SURFACE TREATMENT : TIN PLATED
4. THICKNESS : 0.75 mm

△	Tolerance Unless Otherwise Specified		
0 >	mm ±	ANGLE	
>	mm ±	0° >	° REF ±
>	mm ±	° >	° ±
>	mm ±	° >	° ±

NAME	NON-INSULATED SPADE TERMINALS				UNIT	mm	
PART NO.	SNBL1-3.7	MATERIAL	COPPER		APPROVE		
NUMBER	KT-94433-C	SCALE	SHEET	PAGE	CHECKED		
DATE	2006/12/11	5/1	1-3	10F2	DRAWN	張馨尹	

KST. K.S. TERMINALS INC.