


1 2 3 4 5 6 7 8


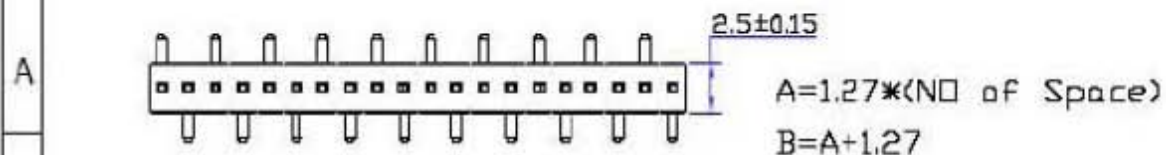


SPECIFICATIONS

Current Rating: 1 Amps
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°C to +105°C
 Max Processing Temp: 230° for 30-60 seconds
 (260° for 10 seconds)

MATERIAL&FINISH

Contact: Brass
 Insulator Material: Nylon 6T
 Color: Black
 Finish: Gold Flash Plated Over Nickel

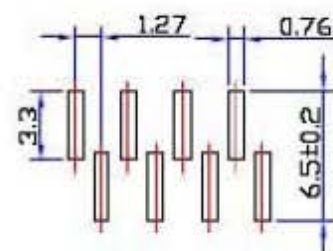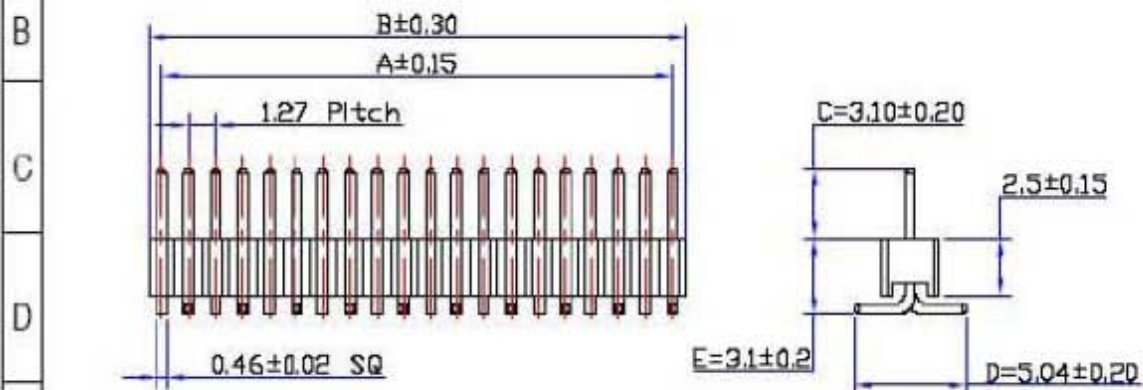

P.C Board Layout
 Type B

T&T Connection System Co., Ltd.

UNIT

SCALE

PART NAME

MM

3:1

1.27mm PIN HEADER H=2.5mm
 SMT SINGLE ROW(C=3.1 D=5.04 E=3.1)

APPD.

CKD.

TOLERANCE

PART NO.

REV.

制表日:2003/08/19

DRAWING.

APPROVED

JEFFREY

± 0.2

SPHSS127-Bxx

A

1 2 3 4 5 6 7 8