


1 2 3 4 5 6 7 8

A

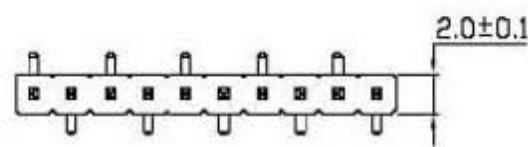




$A=2.0 \times (\text{No of Space})$
 $B=A+2.0$

SPECIFICATIONS
 Current Rating: 2 Amps
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°C to +105°C
 Max Processing Temp: 230° For 30~60 seconds
 (260° For 10 seconds)

B

MATERIAL&FINISH
 Contact: Brass
 Insulator Material: Nylon 6T
 Color: Black
 Finish: Gold Flash Plated Over Nickel

C

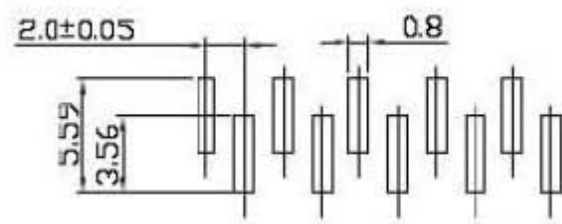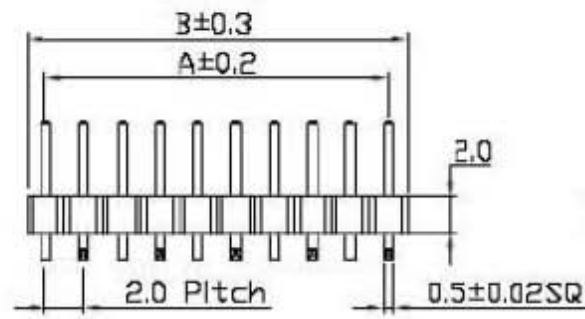

P.C.Board Layout

D

E

F

G

T&T Connection System Co., Ltd.

UNIT		SCALE	PART NAME	
MM		2:1	2.0x2.0 Pin Header Single Row H=2.0 SMT B Type(C=4.0 D=4.2 E=2.7)	
APPD.	CKD.	TOLERANCE	PART NO.	REV.
		± 0.3	SPHSS220-B02-4/3	A

制表日:2003/07/15

DRAWING. APPROVED
 JEFFREY

1 2 3 4 5 6 7 8