
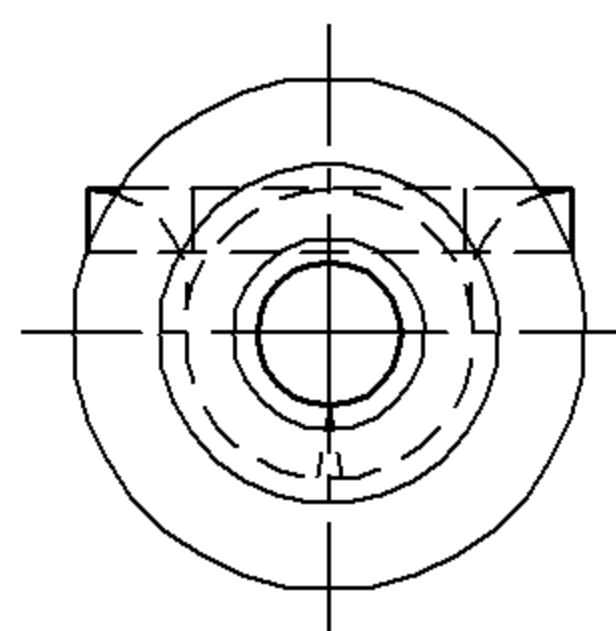
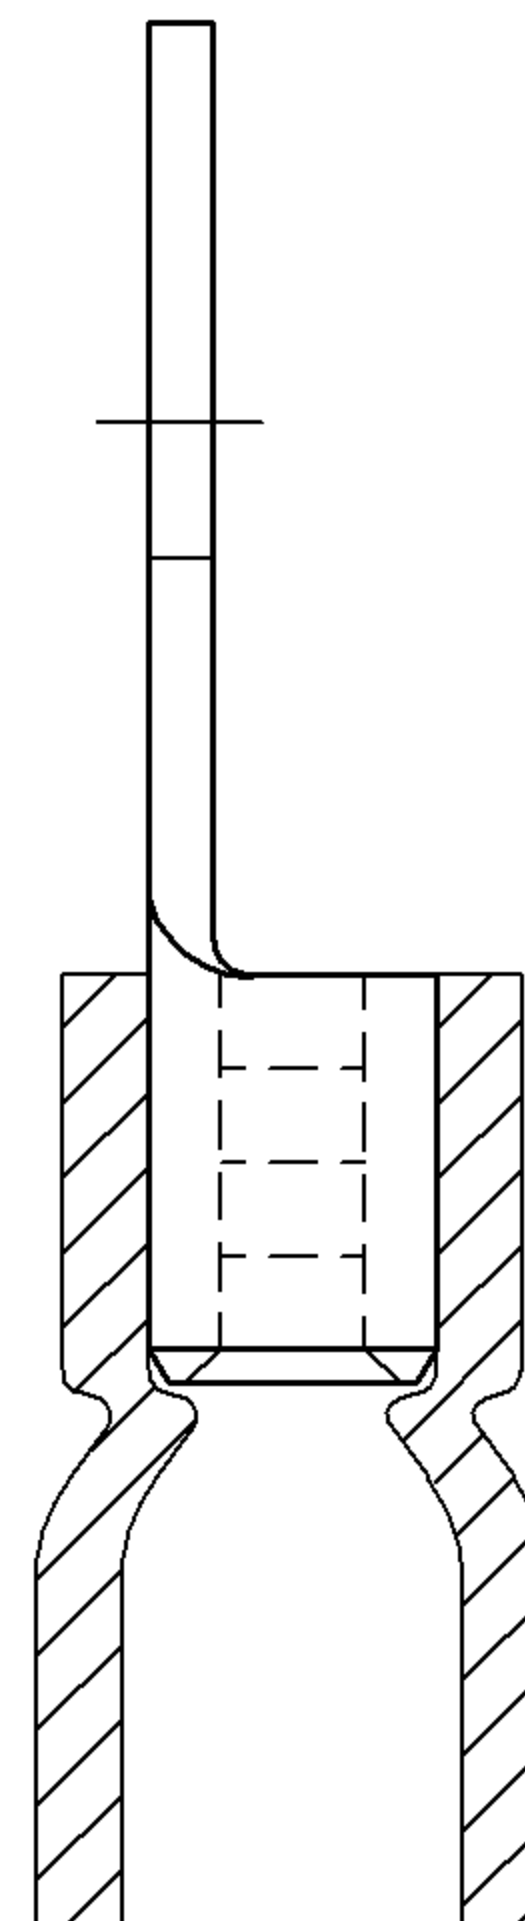


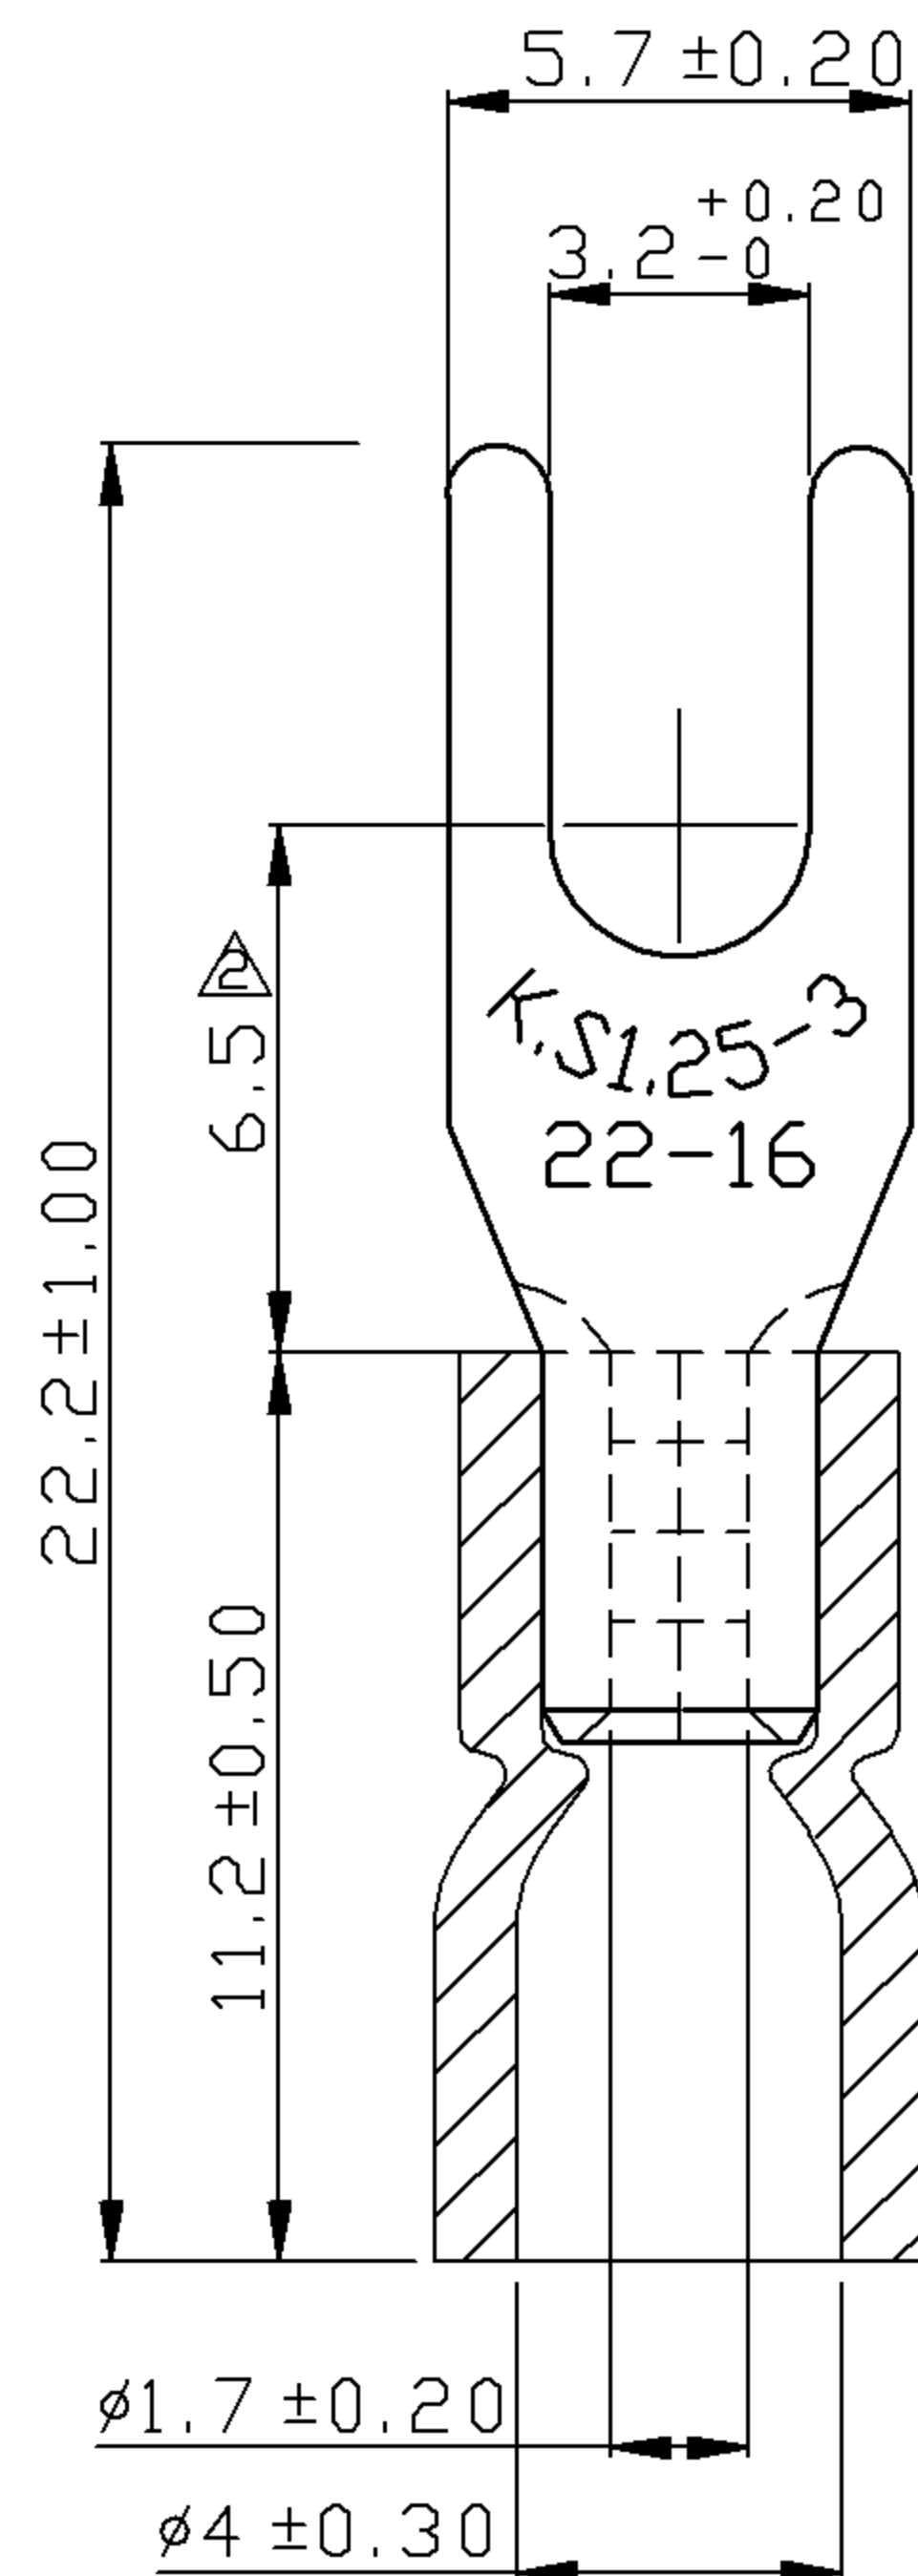

REV	DESCRIPTION	DATE
△	RDK-97048	張馨尹 2008/09/12
△	RDK-97127	張馨尹 2008/09/12
△	RDK-98020	張馨尹 2009/07/24

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16
AMP.	9	12	17	18
2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
3. INSULATION MATERIAL : VINYL
4. INSULATION COLOR : RED
5. TERMINAL MATERIAL : COPPER
6. WIRE RANGE : 22-16 A.W.G. (0.5-1.5 mm²)
7. TERMINAL SURFACE TREATMENT : TIN PLATED
8. TERMINAL THICKNESS : 0.75 mm

Tolerance Unless Otherwise Specified			
0 >	mm ±	ANGLE	
>	mm ±	0°	° REF ±
>	mm ±	°	° ±
>	mm ±	°	° ±

NAME	VINYL-INSULATED (EASY ENTRY) SPADE TERMINALS				UNIT	mm	⊙	⊙
PART NO.	SVE1-3.2	MATERIAL	-----	APPROVE				
NUMBER	KA-95652-C	SCALE	SHEET	PAGE	CHECKED			
DATE	2006/06/22	4/1	1-3	10F2	DRAWN	張馨尹		

KST. K.S. TERMINALS INC.