
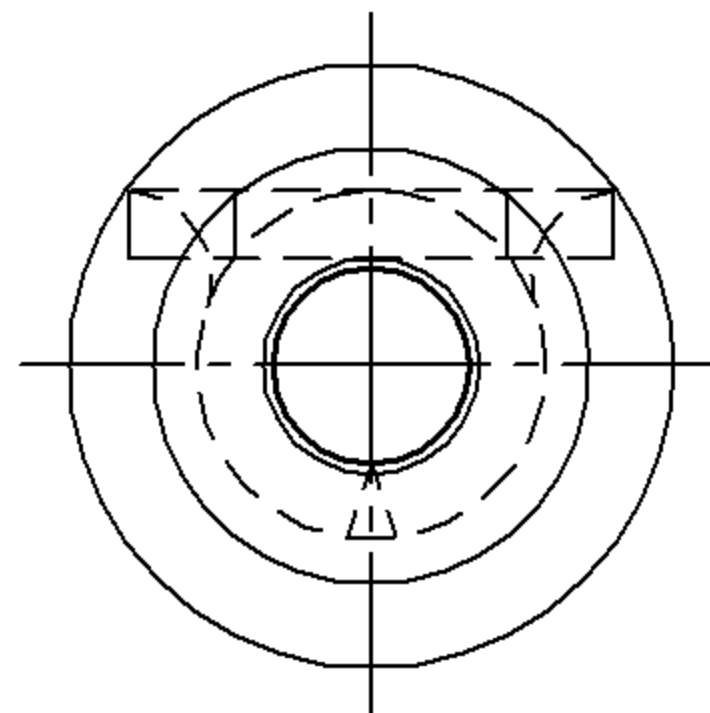
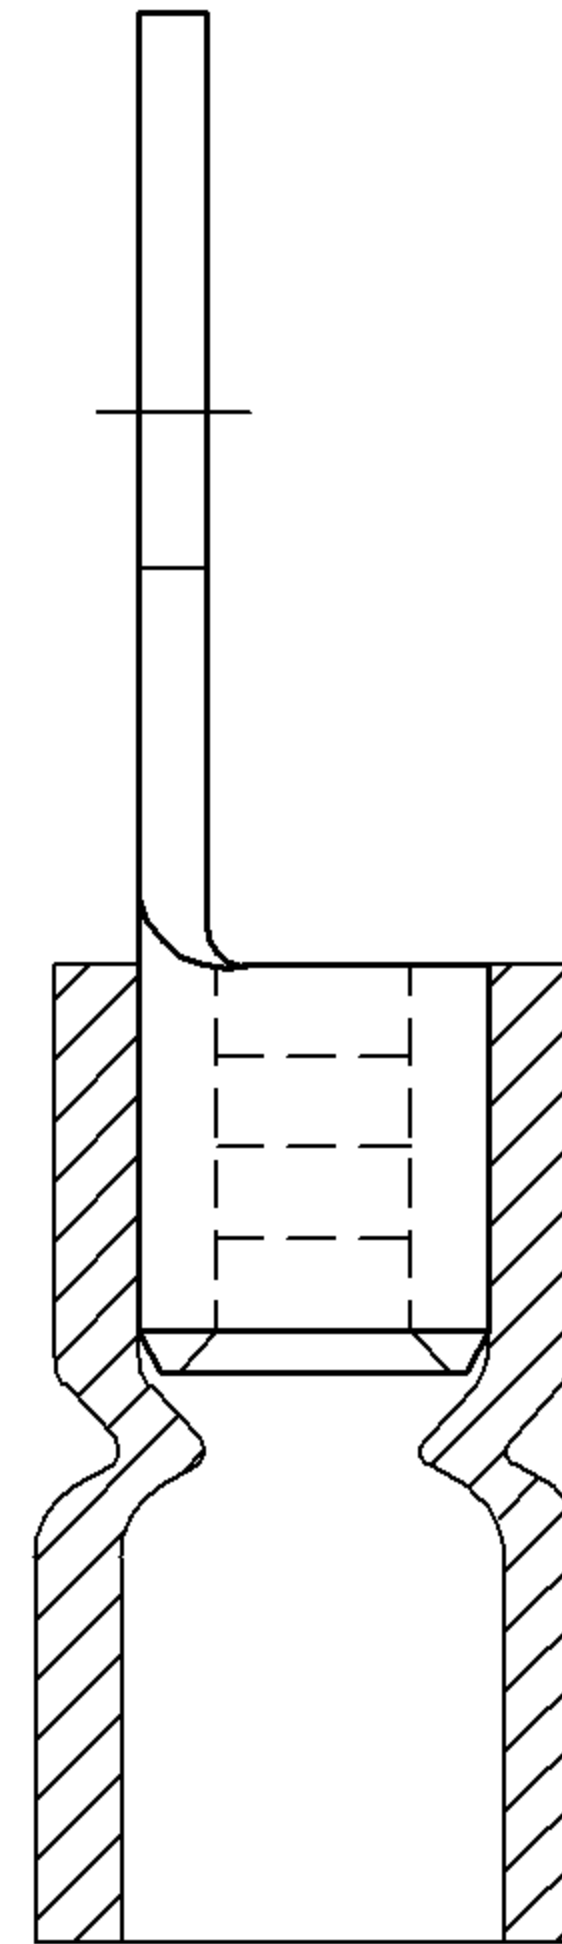


REV	DESCRIPTION	DATE
△	RDK-97048	張馨尹 2008/09/12
△	RDK-97127	張馨尹 2008/09/12
△	RDK-98020	張馨尹 2009/07/24

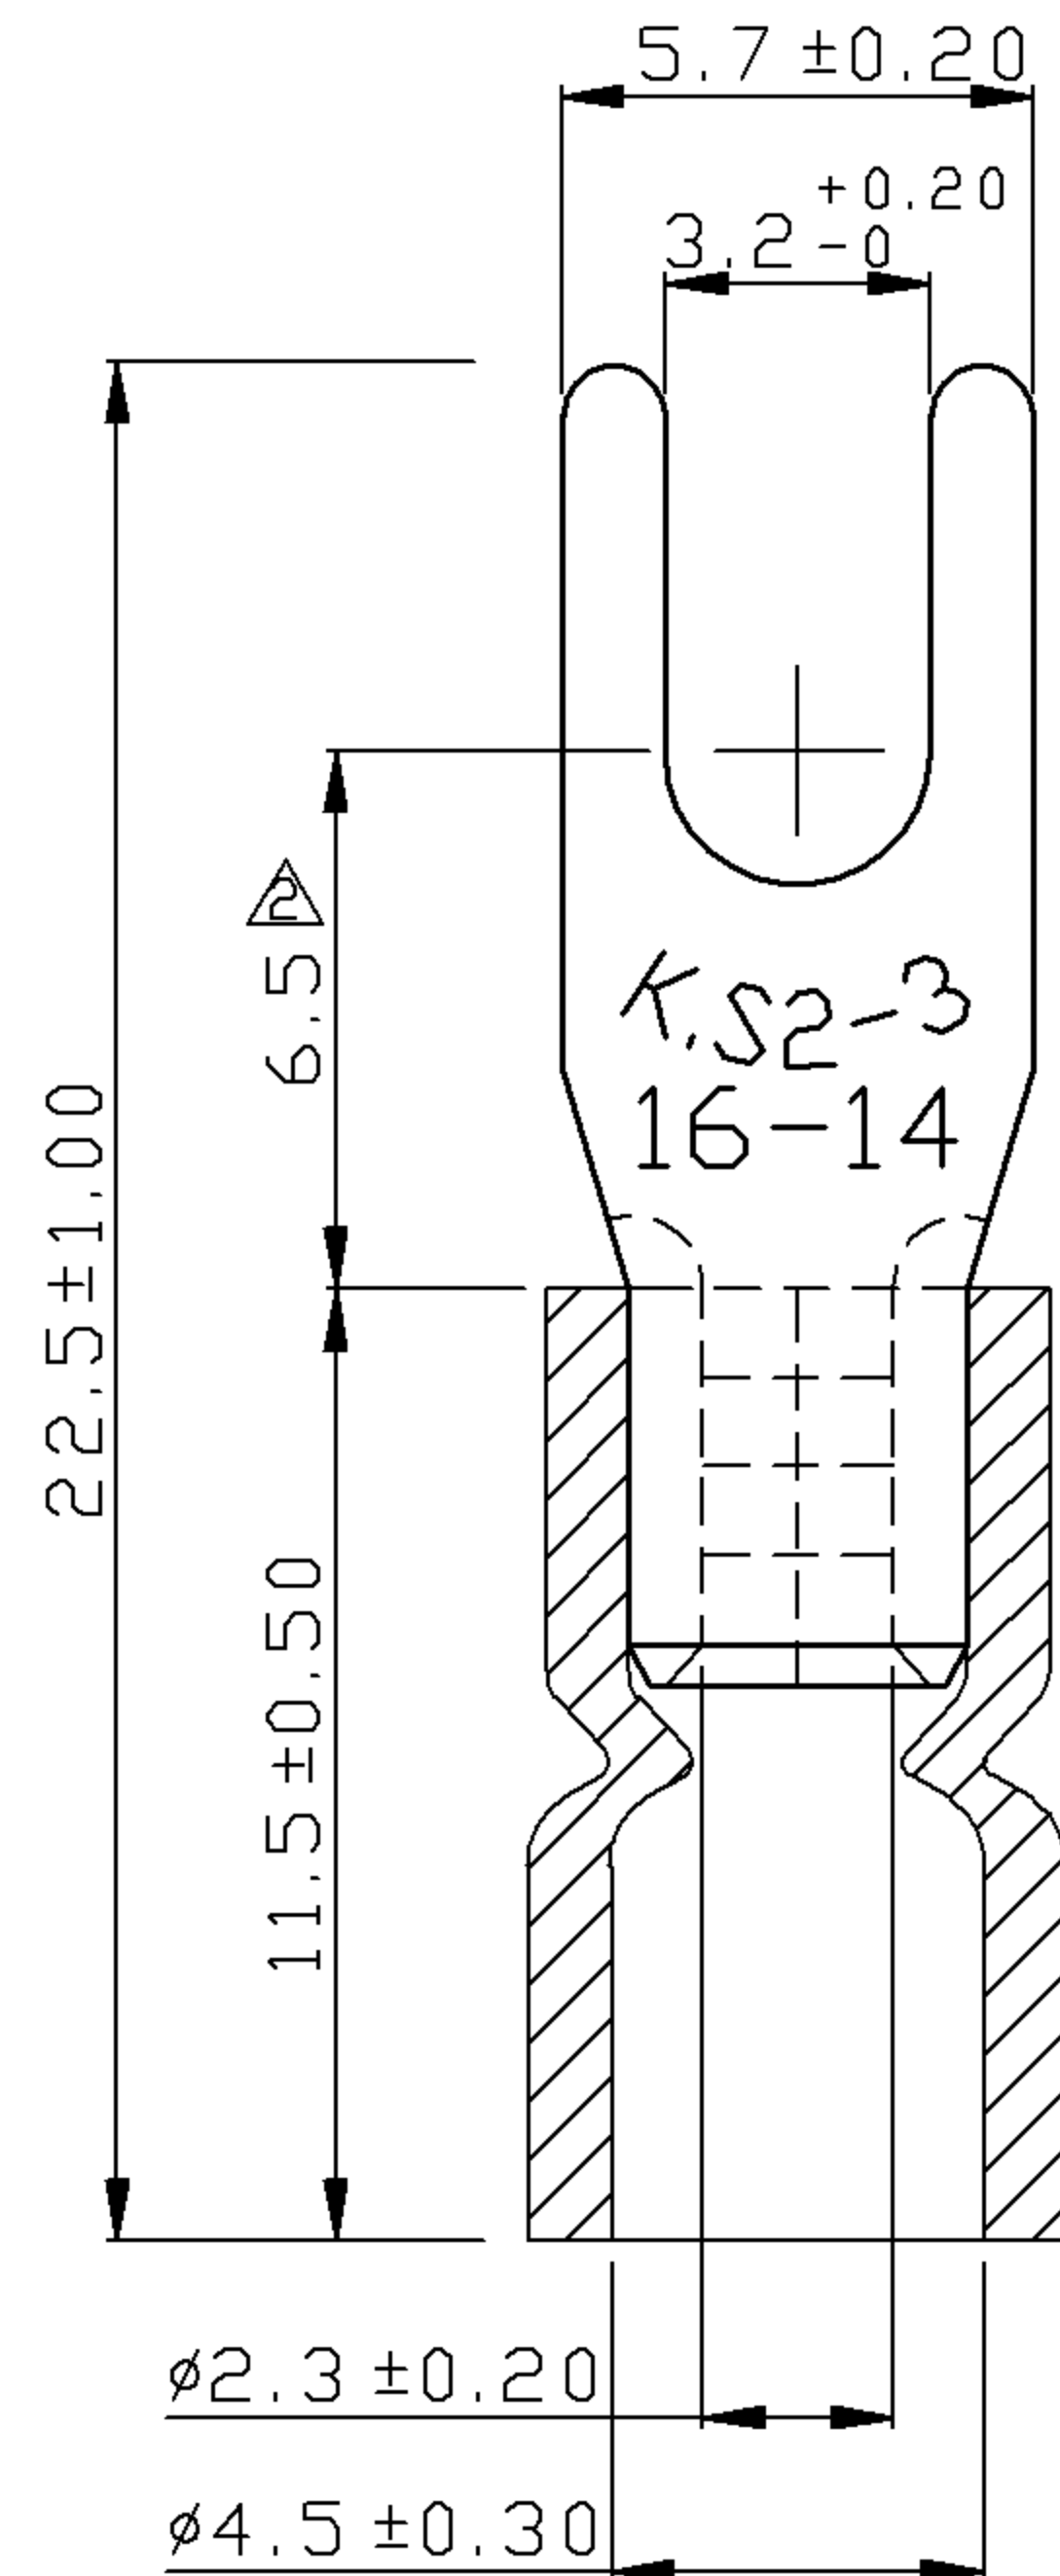

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	16	14
AMP.	18	30
2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
3. INSULATION MATERIAL : VINYL
4. INSULATION COLOR : BLUE
5. TERMINAL MATERIAL : COPPER
6. WIRE RANGE : 16-14 A.W.G. (1.5-2.5 mm²)
7. TERMINAL SURFACE TREATMENT : TIN PLATED
8. TERMINAL THICKNESS : 0.80 mm

Tolerance Unless Otherwise Specified			
0	>	mm ±	ANGLE
>		mm ±	0° > ° REF ±
>		mm ±	° > ° ±
>		mm ±	° > ° ±

NAME	VINYL-INSULATED (EASY ENTRY) SPADE TERMINALS				UNIT	mm	⊙
PART NO.	SVE2-3.2	MATERIAL	-----	APPROVE			
NUMBER	KA-95663-C	SCALE	SHEET	PAGE	CHECKED		
DATE	2006/06/22	4/1	1-3	10F2	DRAWN	張馨尹	

KST. K.S. TERMINALS INC.