
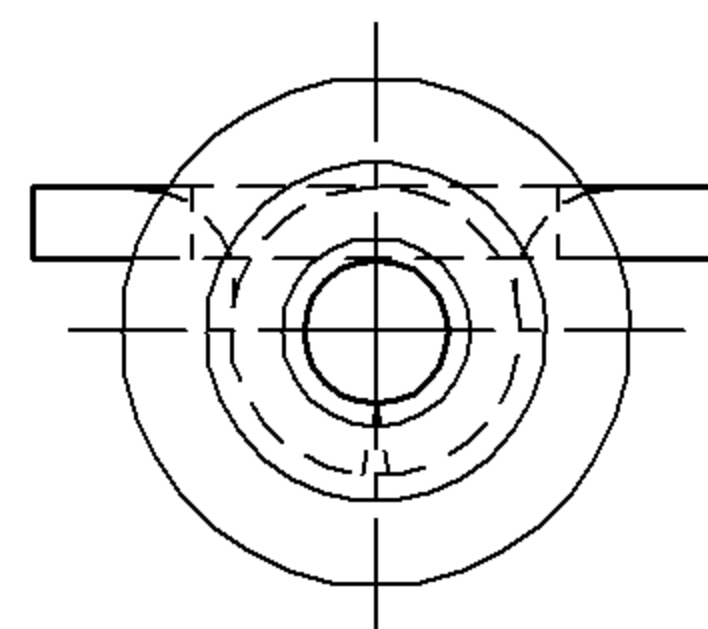
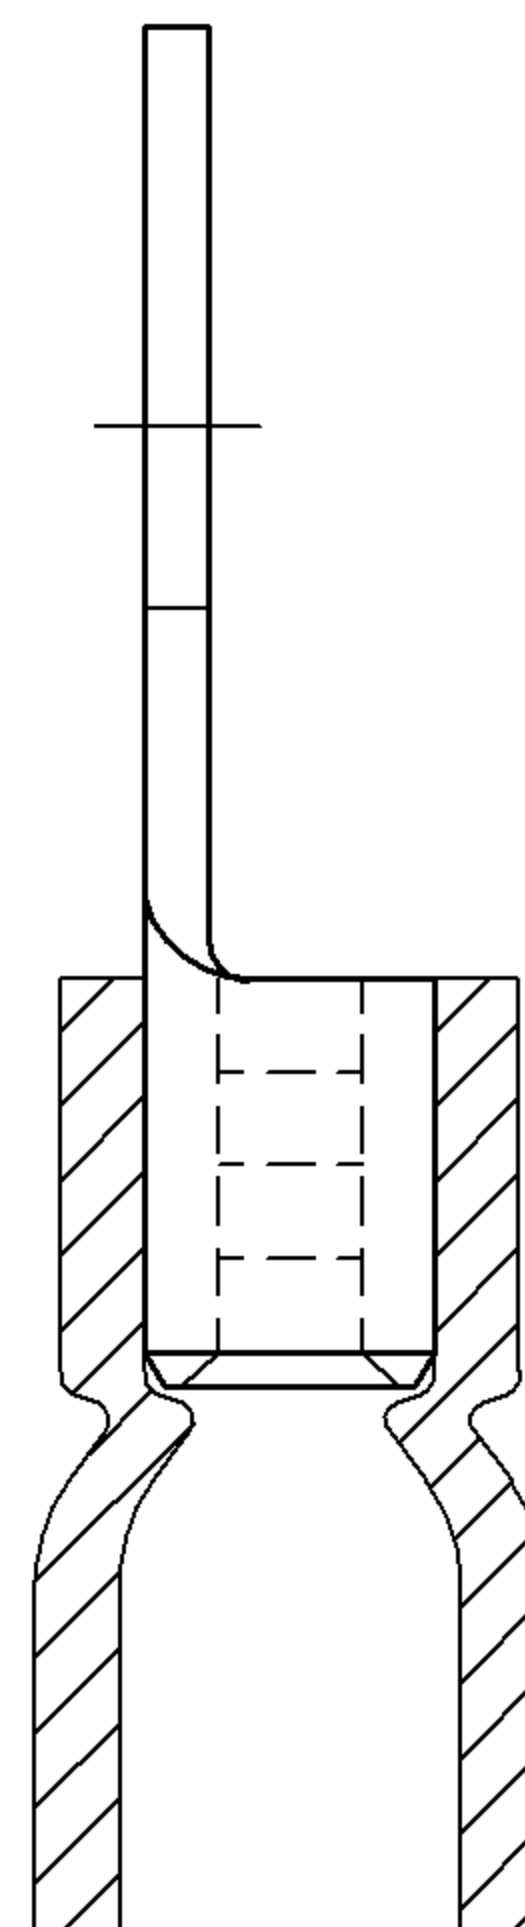


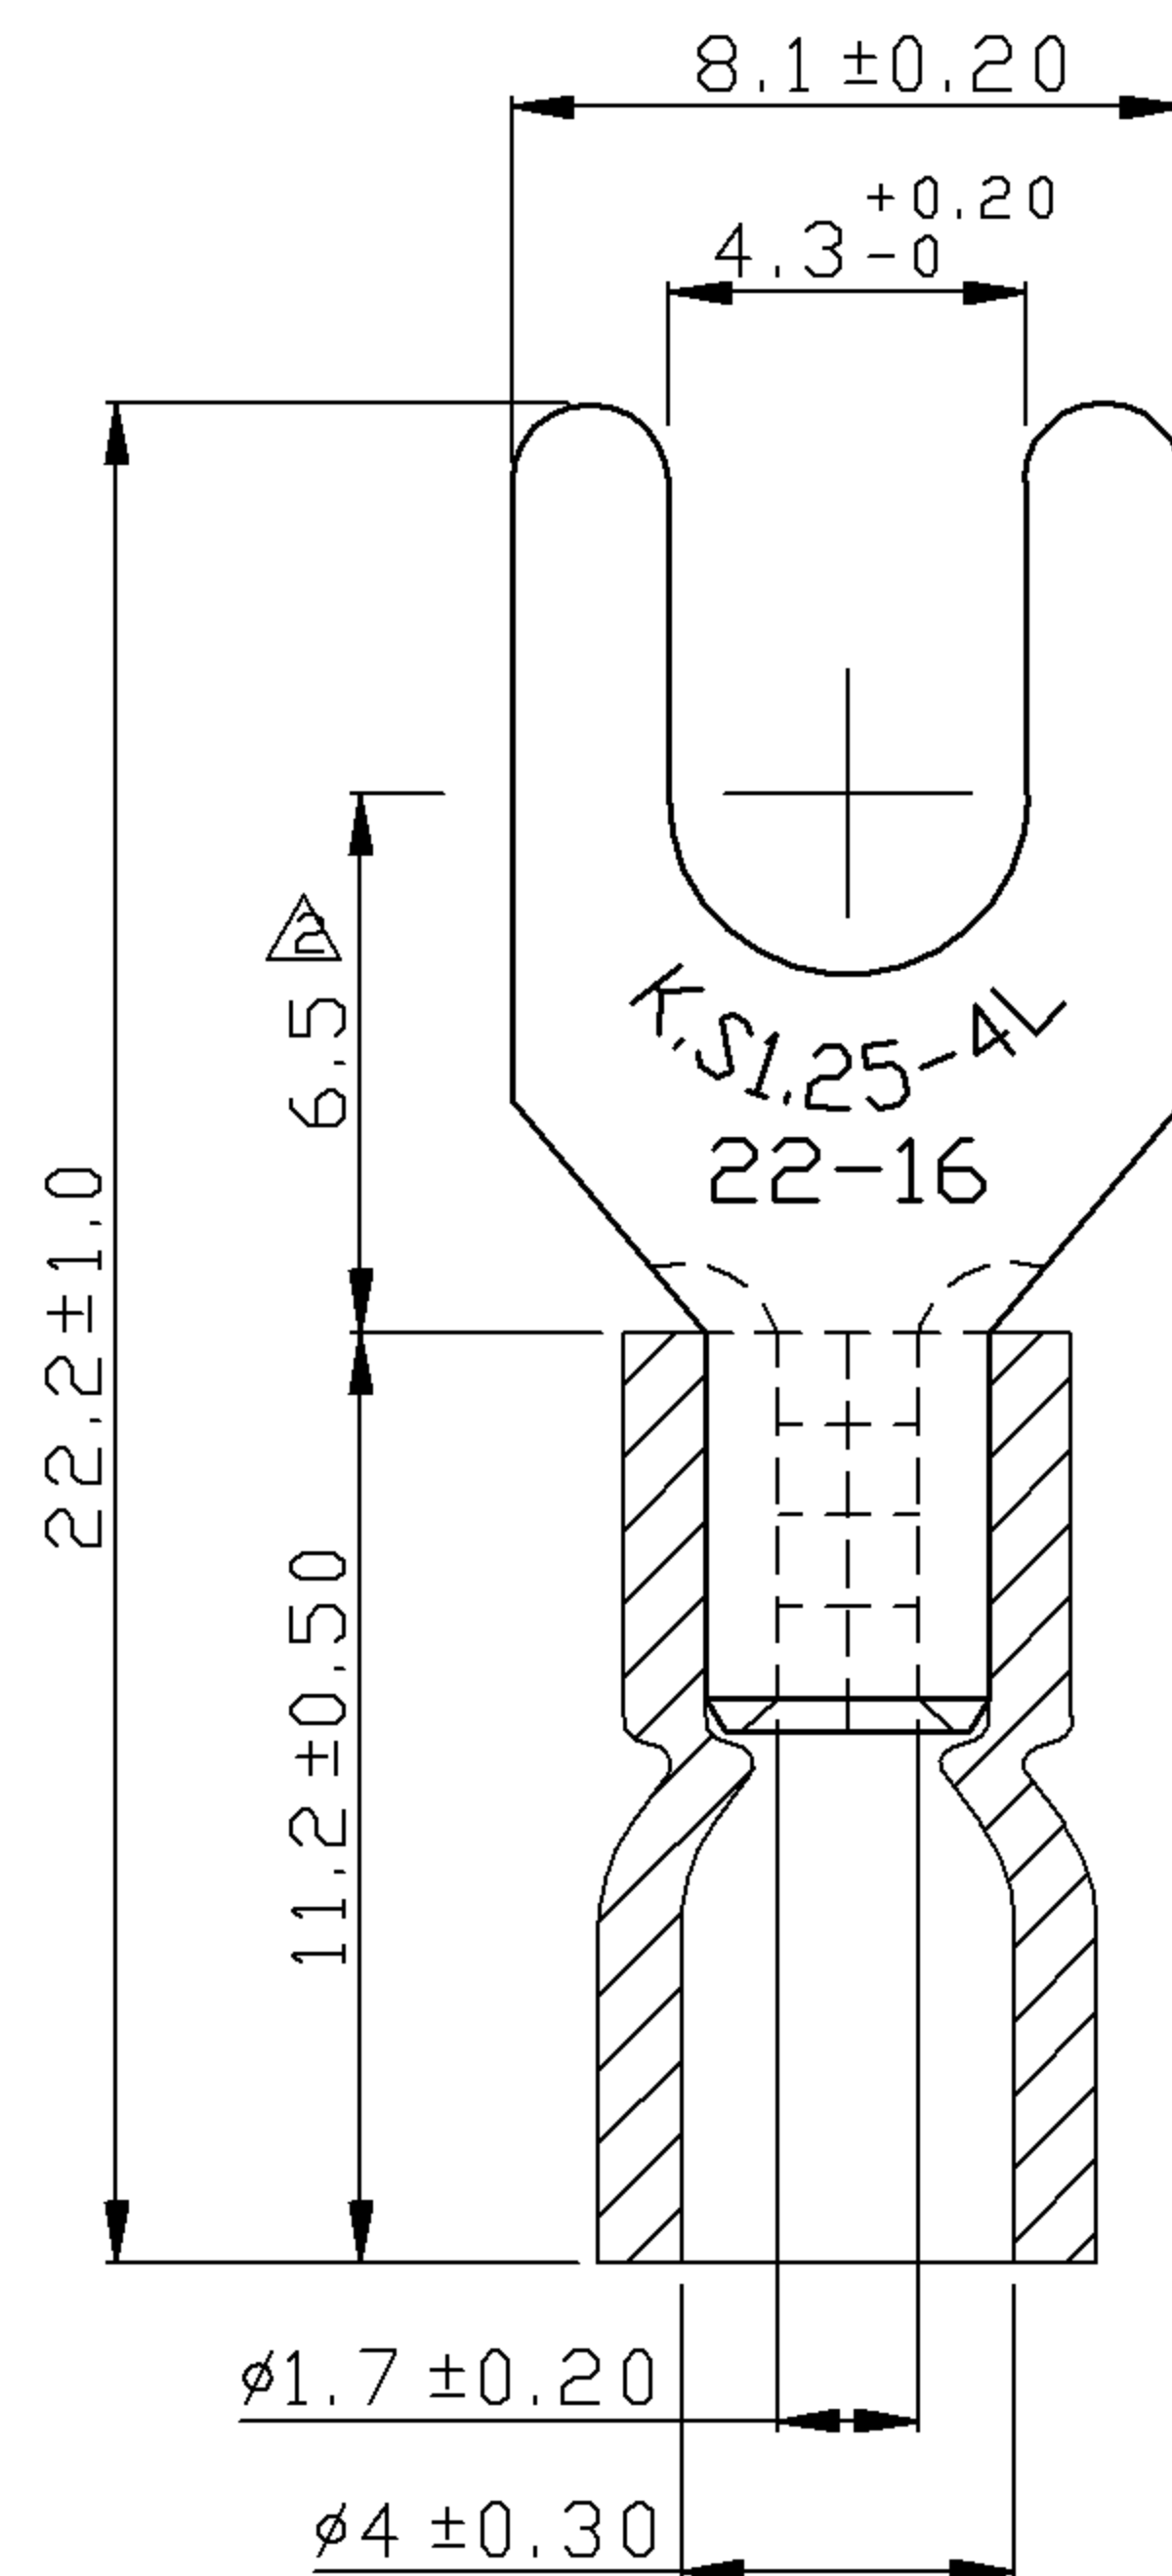

REV	DESCRIPTION	DATE
△	RDK-97048	張馨尹 2009/07/24
△	RDK-97127	張馨尹 2009/07/24
△	RDK-98020	張馨尹 2009/07/24

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16
AMP.	9	12	17	18
2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
3. INSULATION MATERIAL : VINYL
4. INSULATION COLOR : RED
5. TERMINAL MATERIAL : COPPER
6. WIRE RANGE : 22-16 A.W.G. (0.5-1.5 mm²)
7. TERMINAL SURFACE TREATMENT : TIN PLATED
8. TERMINAL THICKNESS : 0.75 mm

Tolerance Unless Otherwise Specified			
0 >	mm ±	ANGLE	
>	mm ±	0°	° REF ±
>	mm ±	°	° ±
>	mm ±	°	° ±

NAME	VINYL-INSULATED (EASY ENTRY) SPADE TERMINALS				UNIT	mm	⊙
PART NO.	SVEL1-4	MATERIAL	-----	APPROVE	張馨尹		
NUMBER	KA-95658-C	SCALE	SHEET	PAGE	CHECKED	張馨尹	
DATE	2006/06/22	4/1	1-3	10F2	DRAWN	張馨尹	

KST. K.S. TERMINALS INC.