
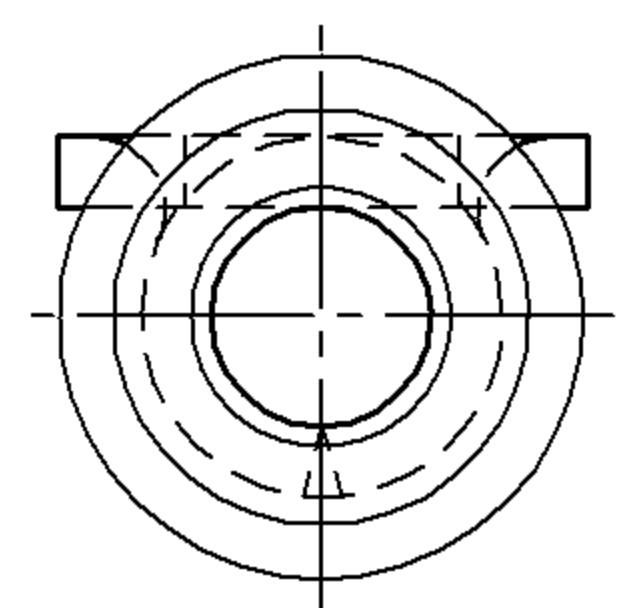
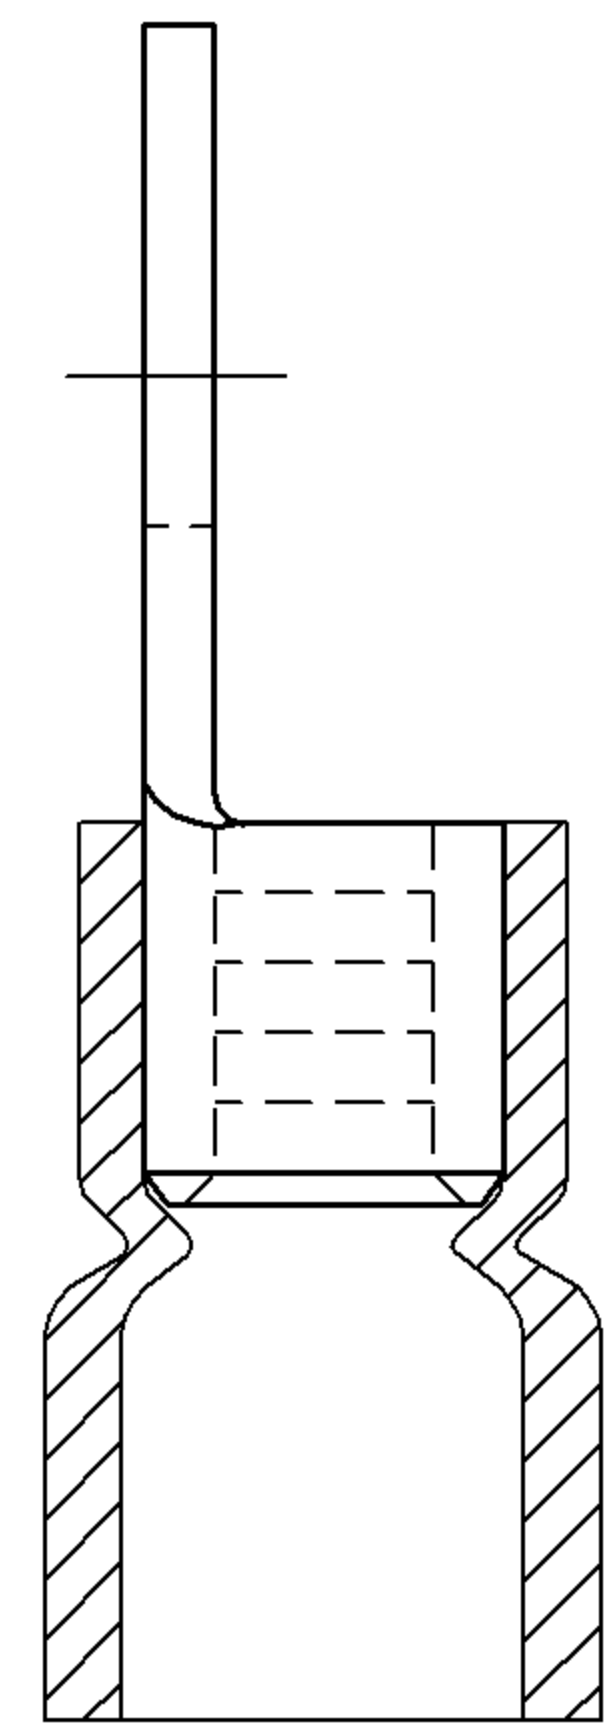


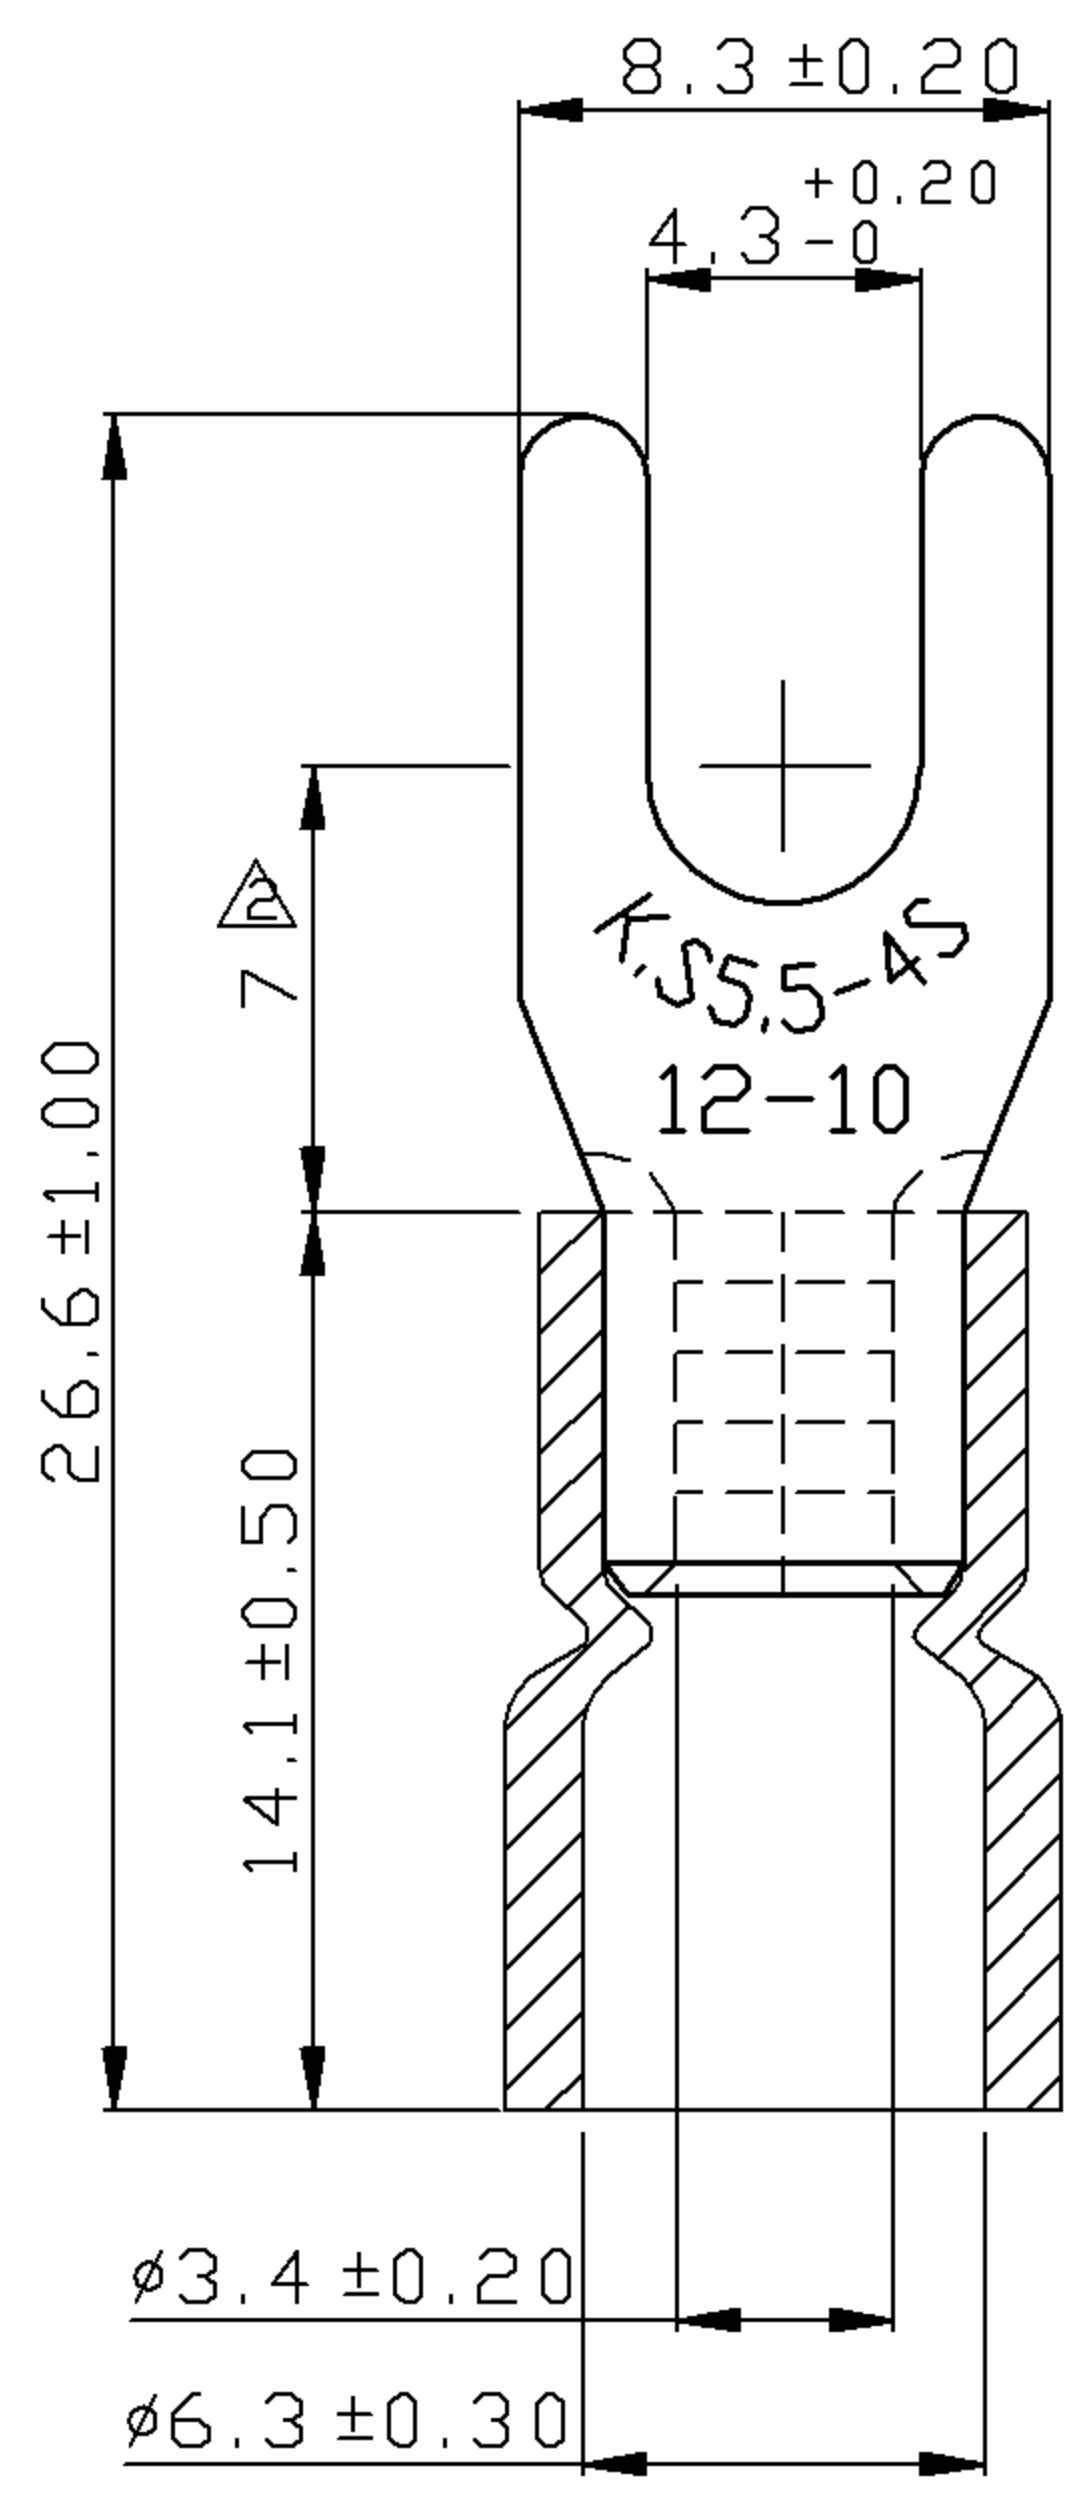

REV	DESCRIPTION	DATE
△1	RDK-97048	張馨尹 2009/07/24
△2	RDK-97127	張馨尹 2009/07/24
△3	RDK-98020	張馨尹 2009/07/24

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	12	10
AMP.	35	50
2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
3. INSULATION MATERIAL : VINYL
4. INSULATION COLOR : YELLOW
5. TERMINAL MATERIAL : COPPER
6. WIRE RANGE : 12-10 A.W.G. (4 - 6 mm²)
7. TERMINAL SURFACE TREATMENT : TIN PLATED
8. TERMINAL THICKNESS : 1.00 mm

△	Tolerance Unless Otherwise Specified		
0 >	mm ±	ANGLE	
>	mm ±	0° >	° REF ±
>	mm ±	° >	° ±
>	mm ±	° >	° ±

NAME	VINYL-INSULATED (EASY ENTRY) SPADE TERMINALS				UNIT	mm	
PART NO.	SVES5-4	MATERIAL	-----	APPROVE			
NUMBER	KA-95677-C	SCALE	SHEET	PAGE	CHECKED		
DATE	2006/06/22	3/1	1-3	10F2	DRAWN	張馨尹	

KST. K.S. TERMINALS INC.