


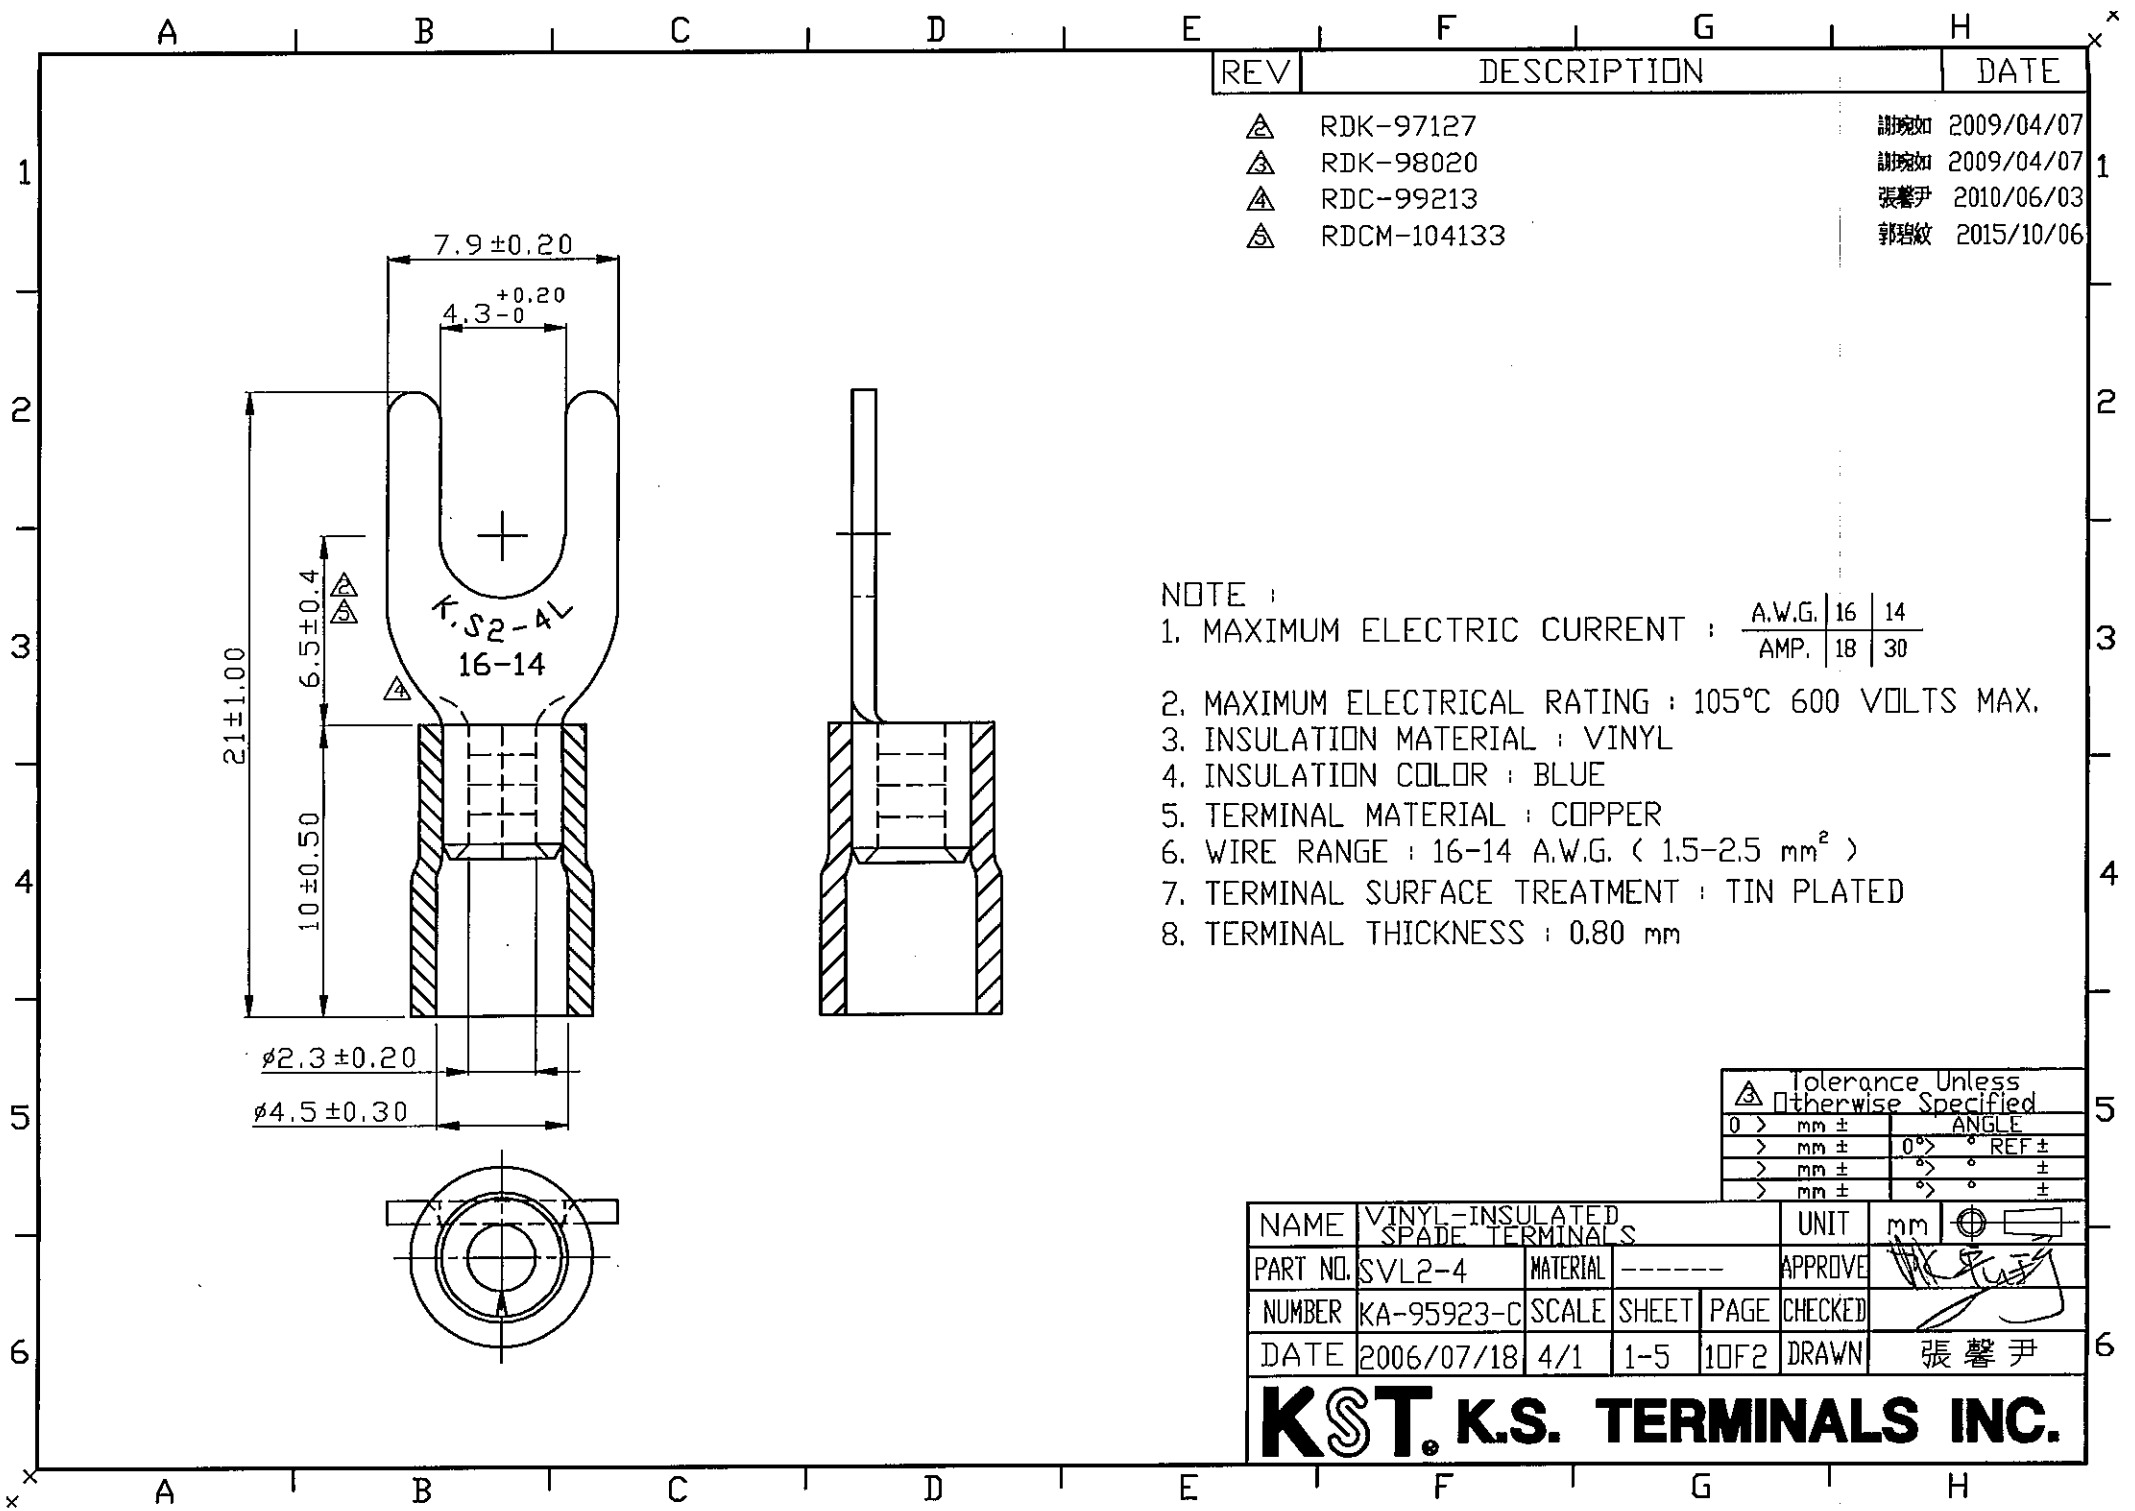

REV	DESCRIPTION	DATE
△	RDK-97127	謝婉如 2009/04/07
△	RDK-98020	謝婉如 2009/04/07
△	RDC-99213	張馨尹 2010/06/03
△	RDCM-104133	郭碧紋 2015/10/06

- NOTE :
1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	16	14
AMP.	18	30
 2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
 3. INSULATION MATERIAL : VINYL
 4. INSULATION COLOR : BLUE
 5. TERMINAL MATERIAL : COPPER
 6. WIRE RANGE : 16-14 A.W.G. (1.5-2.5 mm²)
 7. TERMINAL SURFACE TREATMENT : TIN PLATED
 8. TERMINAL THICKNESS : 0.80 mm

△	Tolerance Unless
□	Otherwise Specified
0 >	mm ±
>	mm ±
>	mm ±
>	mm ±

NAME	VINYL-INSULATED SPADE TERMINALS	UNIT	mm
PART NO.	SVL2-4	MATERIAL	-----
NUMBER	KA-95923-C	SCALE	SHEET PAGE
DATE	2006/07/18	4/1	1-5 10F2
DRAWN	張馨尹	CHECKED	

KST. K.S. TERMINALS INC.