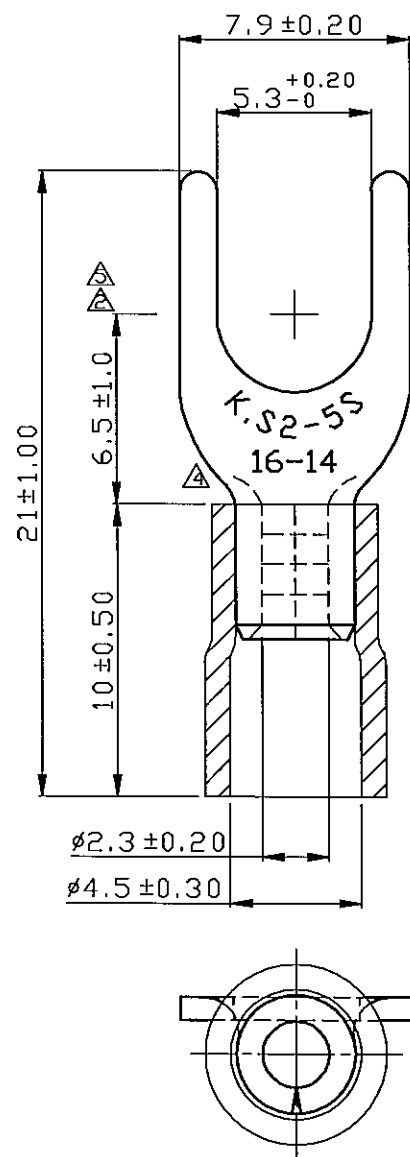


REV	DESCRIPTION	DATE
△	RDK-97048	謝婉如 2008/06/27
△	RDK-97127	謝婉如 2009/04/07
△	RDK-98020	謝婉如 2009/04/07
△	RDC-99213	張馨尹 2010/06/03
△	RDCM-105077	林淑祺 2016/06/21

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	16	14
AMP.	18	30
2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
3. INSULATION MATERIAL : VINYL
4. INSULATION COLOR : BLUE
5. TERMINAL MATERIAL : COPPER
6. WIRE RANGE : 16-14 A.W.G. (1.5-2.5 mm²)
7. TERMINAL SURFACE TREATMENT : TIN PLATED
8. TERMINAL THICKNESS : 0.80 mm

Tolerance Unless Otherwise Specified	
0 >	mm ±
>	mm ±
>	mm ±
>	mm ±

NAME	VINYL-INSULATED SPADE TERMINALS	UNIT	mm	①
PART NO.	SVS2-5	MATERIAL	-----	APPROVE
NUMBER	KA-95924-C	SCALE	SHEET	PAGE
DATE	2006/07/18	4/1	1-5	10F1
DRAWN	張馨尹			

KST. K.S. TERMINALS INC.