

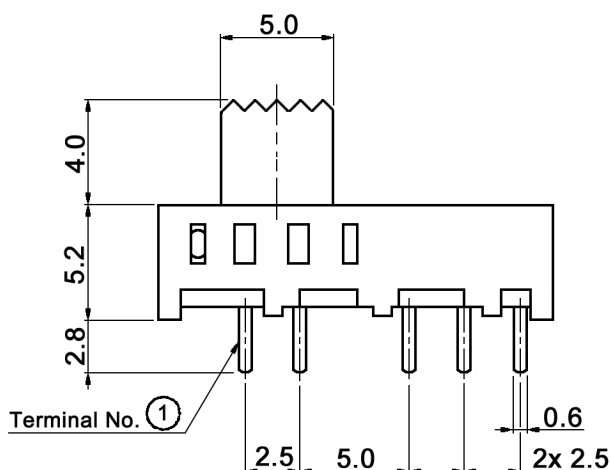
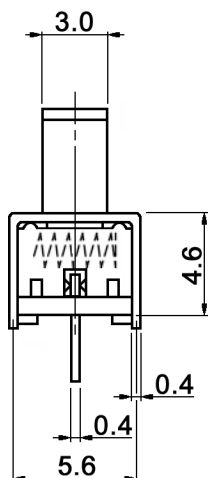


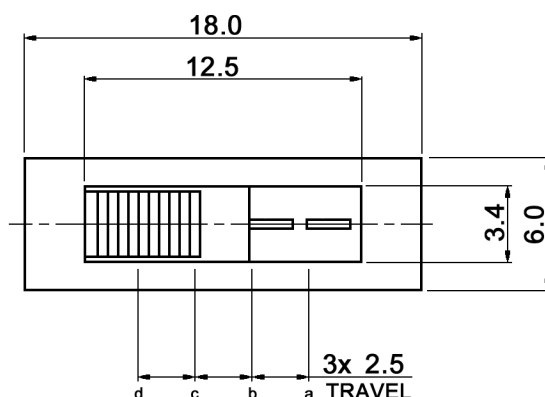


HOLE LAYOUT $\oplus 0.05$

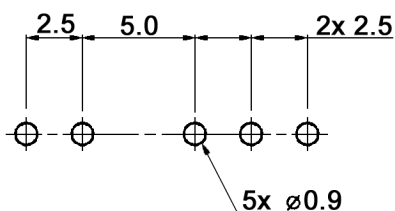

Specifications:

Contact rating:	0.3A, 30V DC
Contact resistance:	30mOhm max.
Insulation resistance:	100MOhm min. at 500V DC
Dielectric strength:	500V AC (50/60Hz, 2mA) for 1 minute
Operating temperature:	-10°C to +60°C
Mechanical life:	10 000 cycles
Operating force:	a-b d-c: 200 +/-100gf b-c c-b c-d b-a: 300 +/-150gf
Soldering conditions:	iron method: 350 +/-10°C, 3 +/-1sec.
Material:	Terminal: brass strip, silver plated Contact clip: C5210R-EH, silver plated Steel ball: carbon steel, natural Spring: SWC, temper Base: phenolic resin, natural Frame: SPCC, nickel plated Slider: POM, black

CIRCUIT DIAGRAM BOTTOM VIEW



Compliance: RohS II (2011/65/EU)

Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm			Date	Name	MFP 1424				
			07/15	dr					
			knitter-switch			30 33 78			Page
									1/1
Modifications	Date	Name							