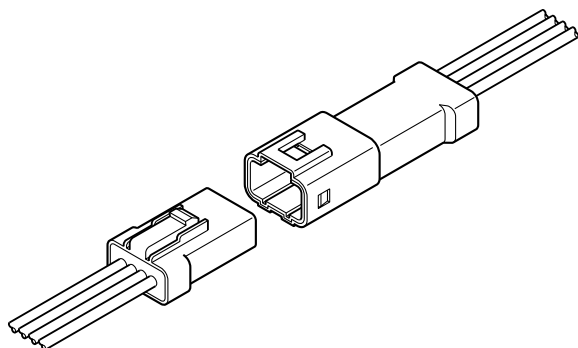


JWPF CONNECTOR

2.0mm pitch/Crimp style wire-to-wire connectors



Applicable for waterproof usage. This is the wire-to-wire connector that is grade 7 ingress protection of JIS C 0920 (IEC 60529 IPX7).

- **Waterproof grade**
- **Contained seal ring**
- **Solid rubber seal**
- **Double-spring construction**
- **Housing-to-terminal locks**
- **Inner-housing lock**

Specifications

- Current rating: 3A AC, DC (AWG #22)
- Voltage rating: 100V AC, DC
- Temperature range: -55°C to +85°C
(including temperature rise in applying electrical current)
- Contact resistance: Initial value/ 10m Ω max.
After environmental testing/ 15m Ω max.
- Insulation resistance: 1,000M Ω min.
- Withstanding voltage: 1,000V AC/minute
- Applicable wire: AWG #26 to #22
0.13 to 0.33mm²
Insulation O.D./ 1.4 to 1.7mm
- Waterproof grade: Grade 7 ingress protection
of JIS C 0920(IEC 60529 IPX7)

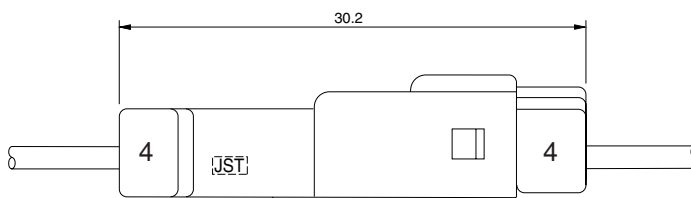
* Compliant with RoHS.

* Refer to "General Instruction and Notice when using Terminals and Connectors" at the end of this catalog.

* Contact JST for details.


Standards

Ⓡ Recognized E60389




Contact

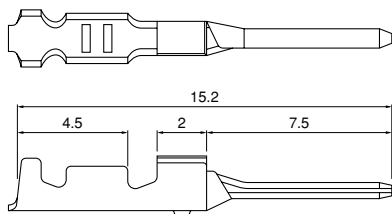Tab contact



Receptacle contact



Model No.		Applicable wire		Insulation O.D. (mm)	Q'ty / reel
Tab contact	Receptacle contact	mm ²	AWG #		
SWPT-001T-P025	SWPR-001T-P025	0.13~0.33	26~22	1.4~1.7	8,200

Material and Finish

Tab contact: Phosphor bronze, tin-plated (reflow treatment)
Receptacle contact: Copper alloy, tin-plated (reflow treatment)

RoHS compliance











Note: Contact JST for brass products.

Contact	Crimping machine	Applicator		
		Crimp applicator	Dies	Crimp applicator with dies
SWPT-001T-P025	AP-K2N	MKS-L	MK/SWPR/T-001-025	APLMK SWPR/T001-025
SWPR-001T-P025		—	—	—

JWPF CONNECTOR

Housing

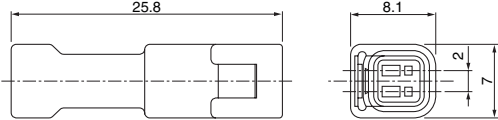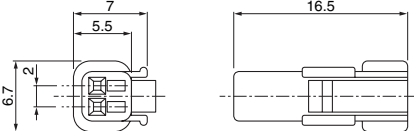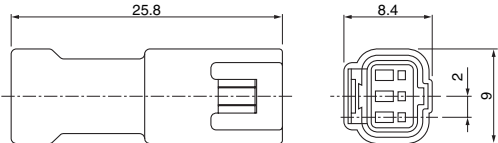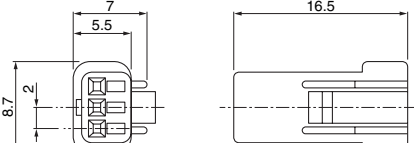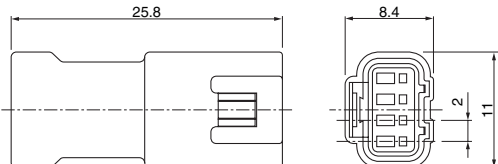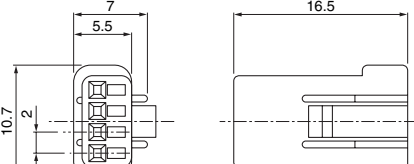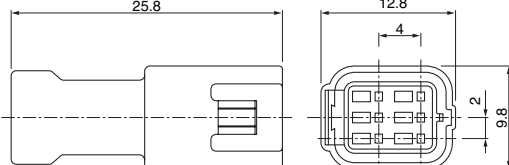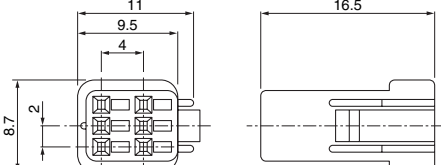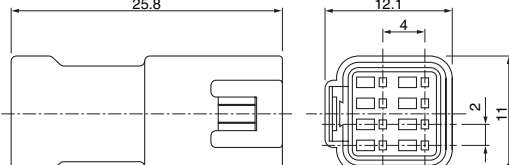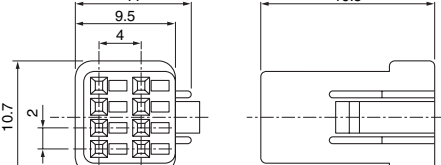Material: PBT, UL94V-0, natural (white)

Circuits	Tab housing (for Tab contact)		Receptacle housing (for Receptacle contact)	
	02T-JWPF-VSLE-S	Q'ty / bag	02R-JWPF-VSLE-S	Q'ty / bag
2		1,000		1,000
	03T-JWPF-VSLE-S	Q'ty / bag	03R-JWPF-VSLE-S	Q'ty / bag
3		1,000		1,000
	04T-JWPF-VSLE-S	Q'ty / bag	04R-JWPF-VSLE-S	Q'ty / bag
4		1,000		1,000
	06T-JWPF-VSLE-D	Q'ty / bag	06R-JWPF-VSLE-D	Q'ty / bag
6		1,000		1,000
	08T-JWPF-VSLE-D	Q'ty / bag	08R-JWPF-VSLE-D	Q'ty / bag
8		1,000		1,000

RoHS compliance

Note: 1. Receptacle housing comes with seal rubber plate.

2. Tab housing comes with seal rubber plate, seal ring and seal ring holder.