

1100 Push Button Switches 0.125A 125Vac



UL 0.125A 125Vac
UL 0.125A 45Vdc
UL file E45221

In house test 0.5A 250Vac T85 5E4 (50,000 Operations)

μ contact gap

Technical data on pages 4 & 5



T1100AA - - -



T1101AA - - -


T 1100 A A - - -

TERMINAL FUNCTION ACTUATOR BODY OPTIONS


TERMINAL	FUNCTION	ACTUATOR	BODY
T 	 1100 ♦ ON - OFF (alternate) Single pole 1101 ♦ ON - OFF (momentary ON) Single pole	A Actuator without button B Softline button 	A For purpose designed facias and sub-panels B Snap-in fixing Panel thickness 0.75-1.24 1.25-1.99 2.00-3.00 Dimension X 19.1/19.2 19.3/19.4 19.7/19.8 C 2 Hole fixing

Dimensions (mm)

T1100AA (Enclosure mounting)

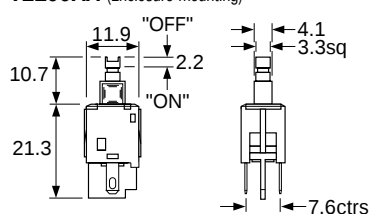

T1100AC (2 Hole Fixing) No.4 self-tapping screws

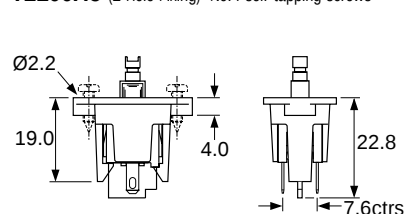

T1100BB (Snap-in) Cut-outs must be punched in the direction of insertion

