

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -






ALL RIGHTS RESERVED.

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	14JAN2015	DW	CW
	A1	ECR-18-004096	15MAR2018	RG	CW

NOTES:
I. TECHNICAL CHARACTERISTICS:
HOOD MATERIAL: DIE CAST ZINC ALLOY
SURFACE: POWDER COATED, RAL7037 OR RAL2004
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
I. 技术参数:
上壳材料: 锌合金
表面处理: 粉末涂层, RAL7037 或 RAL2004
工作温度: -40-+125°C
防护等级: IP65(配合)

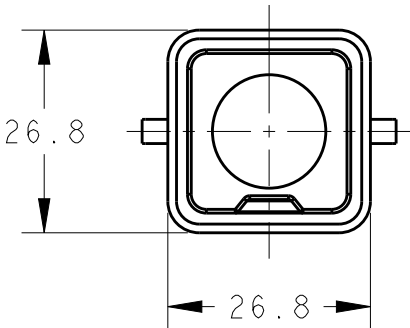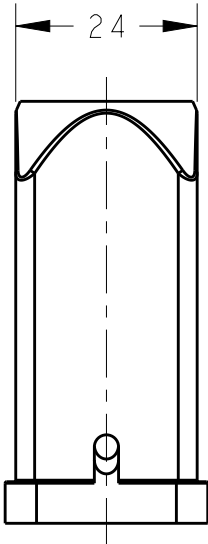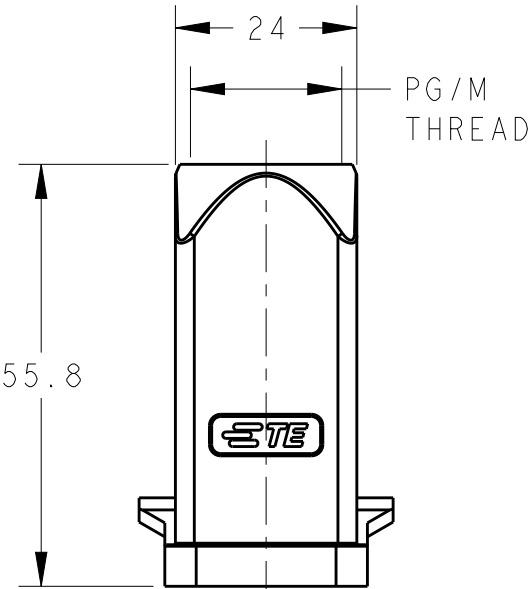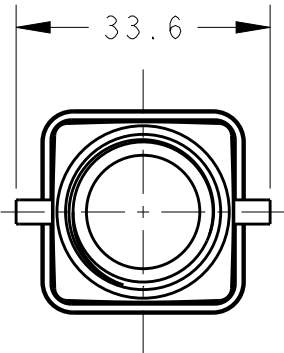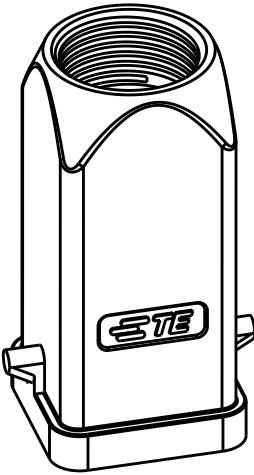

T1329033111-000	H3A-MTG-PG11	RAL2004	PG11
T1329030111-000	H3A-MTG-PG11	RAL7037	PG11
T1329030120-000	H3A-MTG-M20	RAL7037	M20
PART NUMBER	DESCRIPTION	SURFACE POWDER COATED COLOR	THREAD PG/M

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN David Wang 14JAN2015	 TE Connectivity															
DIMENSIONS: mm		CHK Chris Wang 14JAN2015	NAME H3A-MTG-M/PG															
		APVD Xiang Xu 14JAN2015																
<table><tr><td>0 PLC</td><td>±-</td></tr><tr><td>1 PLC</td><td>±-</td></tr><tr><td>2 PLC</td><td>±-</td></tr><tr><td>3 PLC</td><td>±-</td></tr><tr><td>4 PLC</td><td>±-</td></tr><tr><td>ANGLES</td><td>±-</td></tr></table>		0 PLC	±-	1 PLC	±-	2 PLC	±-	3 PLC	±-	4 PLC	±-	ANGLES	±-	PRODUCT SPEC 108-137012	SIZE A3			
		0 PLC	±-															
		1 PLC	±-															
2 PLC	±-																	
3 PLC	±-																	
4 PLC	±-																	
ANGLES	±-																	
APPLICATION SPEC 114-137012	CAGE CODE 00779																	
MATERIAL - -			FINISH - -	DRAWING NO C-T13290301XX000		RESTRICTED TO -												
Customer Drawing		SCALE 1:1	SHEET 1	OF 1	REV A1													