

8500 Rocker Switches - Miniature 10A 250Vac Single & Double Pole



10(6)A 250Vac T125 (non lit types)

6(4)A 250Vac T125 5E4 (50,000 Operations) (non lit types)

10(6)A 250Vac T100 (lit types)



UL CSA 15A Non Ind 250Vac, 14A Ind 250Vac, 10A 277Vac

UL CSA 250Vac 1/2hp, 125Vac 1/4hp

UL 105°C, file E45221, CSA file LR10990



Inrush 85A to EN61058-1 & 10A 28Vdc

3mm contact gap

Technical data on pages 4 & 5 (switches), 66 (indicators)

H 8550 V B ---

TERMINAL FUNCTION ROCKER BODY PRINT, COLOUR, VOLTAGE ETC

▶ TERMINAL	▶ FUNCTION	▶ ROCKER
H 4.8 x 0.8 8.5	Approvals & ratings vary with function On Off Switches are ON when pressed over terminal 1	H Slotted for custom adaptors Slots for snap-in buttons
K 2.6 1.5 2.8 x 0.8 8.5	8500 ♦ ON - OFF Single pole (Uses terminals 1a & 2a)	R Semi-rotary
L 2.6 3.2 2.8 x 0.8 Right angle version of K terminal available on 8500 only	8503 ♦ ON - OFF - Lit Single pole	D Paddle lever (8500 only) (not lit)
R 1.5 3.1 4.8 x 0.8 4.5	8550 ♦ ON - OFF Double pole	V Curved (not lit)
T R1.0 R0.8 3.5 8.5 Solder	8553 ♦ ON - OFF - Lit Double pole	V Curved (lit)
	8580 Available with H terminals only Indicator	X Two colour (not lit)
	 UL, S, D, N, F, UL, KEUR, CUL, S, UL, B, UL, UL	A Softline lens




H8500VB ---
T8500VB ---



H8550VB ---
T8550VB ---



H8550XB ---
T8550XB ---



H8550RB Semi-rotary
A splash proofing option



H8553VB ---
T8553VB ---




H8580AB ---

BODY


Panel cut-outs Flange

Cut-outs must be punched in the direction of insertion

B
Standard body with terminal barrier



BC
Body without terminal barrier



Dimensions for snap-in fixing

Panel thickness	Dim X
0.75-1.25	19.1/19.2
1.25-2.00	19.3/19.4
2.00-3.00	19.7/19.8

OPTIONS

Finish

Matt finish only

Colour

Call factory for custom colours
A full range is available for large orders

Legend printing

Select from the examples or call the factory for custom legends

Lamp voltage

Call factory for details of other available voltages


Protective cover L167

(designed to IP65)

Snap on to bodies with V or X style rockers and A style lens but reduces panel thickness by 0.8mm




DIMENSIONS (mm)

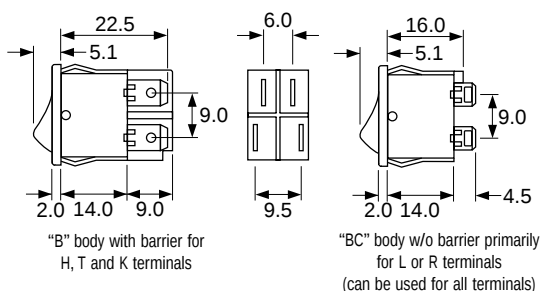


Terminal spacing between 1a & 3b - 6.0, between 2a & 4b - 9.5

Examples of printing



CL076



CL080