

## 50mA, 100mA and 150mA CMOS LDOs with Shutdown and Reference Bypass

### Features:

- Extremely Low Supply Current (50  $\mu$ A, Typ.)
- Very Low Dropout Voltage
- Choice of 50 mA (TC1014), 100 mA (TC1015) and 150 mA (TC1016) Output
- High Output Voltage Accuracy
- Standard or Custom Output Voltages
- Power-Saving Shutdown Mode
- Reference Bypass Input for Ultra Low-Noise Operation
- Over Current and Over Temperature Protection
- Space-Saving 5-Pin SOT-23A Package
- Pin Compatible Upgrades for Bipolar Regulators

### Applications:

- Battery Operated Systems
- Portable Computers
- Medical Instruments
- Instrumentation
- Cellular/GSM/PHS Phones
- Linear Post-Regulator for SMPS
- Pagers


### Device Selection Table

| Part Number  | Package       | Junction Temp. Range |
|--------------|---------------|----------------------|
| TC1014-xxVCT | 5-Pin SOT-23A | -40°C to +125°C      |
| TC1015-xxVCT | 5-Pin SOT-23A | -40°C to +125°C      |
| TC1185-xxVCT | 5-Pin SOT-23A | -40°C to +125°C      |

**Note:** xx indicates output voltages. Available output voltages: 1.8, 2.5, 2.6, 2.7, 2.8, 2.85, 3.0, 3.3, 3.6, 4.0, 5.0.

Other output voltages are available. Please contact Microchip Technology Inc. for details.

### Package Type

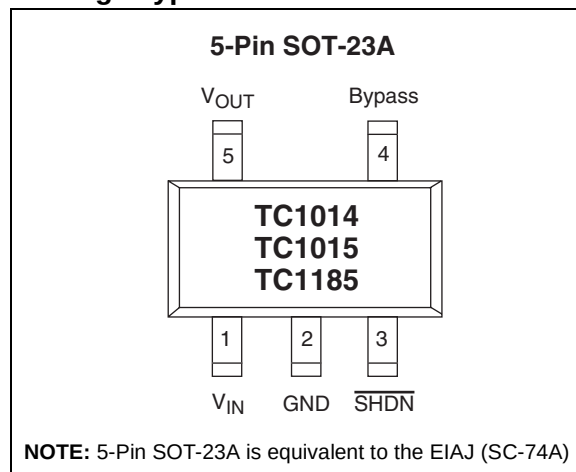

# TC1014/TC1015/TC1185


## General Description

The TC1014/TC1015/TC1185 are high accuracy (typically  $\pm 0.5\%$ ) CMOS upgrades for older (bipolar) low dropout regulators such as the LP2980. Designed specifically for battery-operated systems, the devices' CMOS construction eliminates wasted ground current, significantly extending battery life. Total supply current is typically  $50\text{ }\mu\text{A}$  at full load (20 to 60 times lower than in bipolar regulators).

The devices' key features include ultra low-noise operation (plus optional Bypass input), fast response to step changes in load, and very low dropout voltage – typically  $85\text{ mV}$  (TC1014);  $180\text{ mV}$  (TC1015); and  $270\text{ mV}$  (TC1185) at full load. Supply current is reduced to  $0.5\text{ }\mu\text{A}$  (max) and  $V_{\text{OUT}}$  falls to zero when the shutdown input is low. The devices incorporate both over-temperature and over-current protection.

The TC1014/TC1015/TC1185 are stable with an output capacitor of only  $1\text{ }\mu\text{F}$  and have a maximum output current of  $50\text{ mA}$ ,  $100\text{ mA}$  and  $150\text{ mA}$ , respectively. For higher output current regulators, please see the TC1107/TC1108/TC1173 ( $I_{\text{OUT}} = 300\text{ mA}$ ) data sheets.

## Typical Application

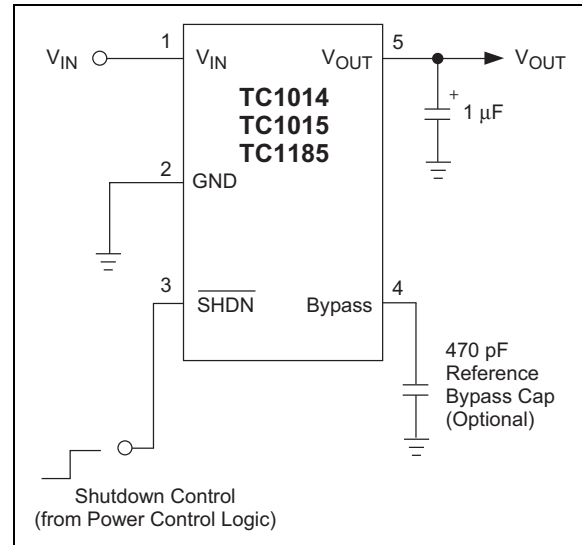

# TC1014/TC1015/TC1185

## 1.0 ELECTRICAL CHARACTERISTICS

### Absolute Maximum Ratings\*

Input Voltage ..... 6.5V  
Output Voltage ..... (-0.3V) to ( $V_{IN} + 0.3V$ )  
Power Dissipation ..... Internally Limited (**Note 7**)  
Maximum Voltage on Any Pin .....  $V_{IN} + 0.3V$  to  $-0.3V$   
Operating Temperature Range .....  $-40^{\circ}\text{C} < T_J < 125^{\circ}\text{C}$   
Storage Temperature .....  $-65^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$

Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions above those indicated in the operation sections of the specifications is not implied. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability.

**TABLE 1-1: TC1014/TC1015/TC1185 ELECTRICAL SPECIFICATIONS**

| <b>Electrical Characteristics:</b> $V_{IN} = V_R + 1V$ , $I_L = 100\ \mu\text{A}$ , $C_L = 3.3\ \mu\text{F}$ , $\overline{\text{SHDN}} > V_{IH}$ , $T_A = 25^{\circ}\text{C}$ , unless otherwise noted. <b>Boldface</b> type specifications apply for junction temperatures of $-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                   |                                       |                             |                                                  |                         |                                         |                                                                                                                                                |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|---------------------------------------|-----------------------------|--------------------------------------------------|-------------------------|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Symbol                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Parameter                         | Min                                   | Typ                         | Max                                              | Units                   | Device                                  | Test Conditions                                                                                                                                |
| $V_{IN}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Input Operating Voltage           | <b>2.7</b>                            | —                           | <b>6.0</b>                                       | V                       | —                                       | <b>Note 1</b>                                                                                                                                  |
| $I_{OUTMAX}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Maximum Output Current            | <b>50</b><br><b>100</b><br><b>150</b> | —<br>—<br>—                 | —<br>—<br>—                                      | mA                      | TC1014<br>TC1015<br>TC1185              |                                                                                                                                                |
| $V_{OUT}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Output Voltage                    | $V_R - 2.5\%$                         | $V_R \pm 0.5\%$             | $V_R + 2.5\%$                                    | V                       | —                                       | <b>Note 2</b>                                                                                                                                  |
| $TCV_{OUT}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | $V_{OUT}$ Temperature Coefficient | —<br>—                                | 20<br><b>40</b>             | —<br>—                                           | ppm/ $^{\circ}\text{C}$ | —                                       | <b>Note 3</b>                                                                                                                                  |
| $\Delta V_{OUT}/\Delta V_{IN}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Line Regulation                   | —                                     | 0.05                        | <b>0.35</b>                                      | %                       | —                                       | $(V_R + 1V) \leq V_{IN} \leq 6V$                                                                                                               |
| $\Delta V_{OUT}/I_{OUT}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Load Regulation                   | —<br>—                                | 0.5<br>0.5                  | <b>2</b><br><b>3</b>                             | %                       | TC1014; TC1015<br>TC1185                | $I_L = 0.1\ \text{mA}$ to $I_{OUTMAX}$<br>$I_L = 0.1\ \text{mA}$ to $I_{OUTMAX}$<br>( <b>Note 4</b> )                                          |
| $V_{IN}-V_{OUT}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Dropout Voltage                   | —<br>—<br>—<br>—<br>—                 | 2<br>65<br>85<br>180<br>270 | —<br>—<br><b>120</b><br><b>250</b><br><b>400</b> | mV                      | —<br>—<br>—<br>TC1015; TC1185<br>TC1185 | $I_L = 100\ \text{mA}$<br>$I_L = 20\ \text{mA}$<br>$I_L = 50\ \text{mA}$<br>$I_L = 100\ \text{mA}$<br>$I_L = 150\ \text{mA}$ ( <b>Note 5</b> ) |
| $I_{IN}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Supply Current ( <b>Note 8</b> )  | —                                     | 50                          | <b>80</b>                                        | $\mu\text{A}$           | —                                       | $\overline{\text{SHDN}} = V_{IH}$ , $I_L = 0$                                                                                                  |
| $I_{INSD}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Shutdown Supply Current           | —                                     | 0.05                        | 0.5                                              | $\mu\text{A}$           | —                                       | $\overline{\text{SHDN}} = 0V$                                                                                                                  |
| PSRR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Power Supply Rejection Ratio      | —                                     | 64                          | —                                                | dB                      | —                                       | $F_{RE} \leq 1\ \text{kHz}$                                                                                                                    |
| $I_{OUTSC}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Output Short Circuit Current      | —                                     | 300                         | 450                                              | mA                      | —                                       | $V_{OUT} = 0V$                                                                                                                                 |
| $\Delta V_{OUT}/\Delta P_D$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Thermal Regulation                | —                                     | 0.04                        | —                                                | V/W                     | —                                       | <b>Notes 6, 7</b>                                                                                                                              |
| $T_{SD}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Thermal Shutdown Die Temperature  | —                                     | 160                         | —                                                | $^{\circ}\text{C}$      | —                                       |                                                                                                                                                |
| $\Delta T_{SD}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Thermal Shutdown Hysteresis       | —                                     | 10                          | —                                                | $^{\circ}\text{C}$      | —                                       |                                                                                                                                                |
| <b>Note</b> 1: The minimum $V_{IN}$ has to meet two conditions: $V_{IN} \geq 2.7V$ and $V_{IN} \geq V_R + V_{DROPOUT}$ .<br>2: $V_R$ is the regulator output voltage setting. For example: $V_R = 1.8V, 2.5V, 2.6V, 2.7V, 2.8V, 2.85V, 3.0V, 3.3V, 3.6V, 4.0V, 5.0V$ .<br>3: $TC\ V_{OUT} = \frac{(V_{OUTMAX} - V_{OUTMIN}) \times 10^6}{V_{OUT} \times \Delta T}$<br>4: Regulation is measured at a constant junction temperature using low duty cycle pulse testing. Load regulation is tested over a load range from 1.0 mA to the maximum specified output current. Changes in output voltage due to heating effects are covered by the thermal regulation specification.<br>5: Dropout voltage is defined as the input to output differential at which the output voltage drops 2% below its nominal value at a 1V differential.<br>6: Thermal Regulation is defined as the change in output voltage at a time T after a change in power dissipation is applied, excluding load or line regulation effects. Specifications are for a current pulse equal to $I_{LMAX}$ at $V_{IN} = 6V$ for $T = 10\ \text{msec}$ .<br>7: The maximum allowable power dissipation is a function of ambient temperature, the maximum allowable junction temperature and the thermal resistance from junction-to-air (i.e., $T_A, T_J, \theta_{JA}$ ). Exceeding the maximum allowable power dissipation causes the device to initiate thermal shutdown. Please see <b>Section 4.0 "Thermal Considerations"</b> for more details.<br>8: Apply for Junction Temperatures of $-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ . |                                   |                                       |                             |                                                  |                         |                                         |                                                                                                                                                |

# TC1014/TC1015/TC1185

**TABLE 1-1: TC1014/TC1015/TC1185 ELECTRICAL SPECIFICATIONS (CONTINUED)**

| <b>Electrical Characteristics:</b> $V_{IN} = V_R + 1V$ , $I_L = 100 \mu A$ , $C_L = 3.3 \mu F$ , $\overline{SHDN} > V_{IH}$ , $T_A = 25^\circ C$ , unless otherwise noted. <b>Boldface</b> type specifications apply for junction temperatures of $-40^\circ C$ to $+125^\circ C$ .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                           |     |     |     |                 |        |                                                                    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|-----|-----|-----|-----------------|--------|--------------------------------------------------------------------|
| Symbol                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Parameter                 | Min | Typ | Max | Units           | Device | Test Conditions                                                    |
| eN                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Output Noise              | —   | 600 | —   | nV/ $\sqrt{Hz}$ | —      | $I_L = I_{OUTMAX}$ ,<br>F = 10 kHz<br>470 pF from Bypass<br>to GND |
| <b>SHDN Input</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                           |     |     |     |                 |        |                                                                    |
| $V_{IH}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | SHDN Input High Threshold | 45  | —   | —   | % $V_{IN}$      | —      | $V_{IN} = 2.5V$ to $6.5V$                                          |
| $V_{IL}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | SHDN Input Low Threshold  | —   | —   | 15  | % $V_{IN}$      | —      | $V_{IN} = 2.5V$ to $6.5V$                                          |
| <b>Note</b> <ol style="list-style-type: none"> <li>1: The minimum <math>V_{IN}</math> has to meet two conditions: <math>V_{IN} \geq 2.7V</math> and <math>V_{IN} \geq V_R + V_{DROPOUT}</math>.</li> <li>2: <math>V_R</math> is the regulator output voltage setting. For example: <math>V_R = 1.8V, 2.5V, 2.6V, 2.7V, 2.8V, 2.85V, 3.0V, 3.3V, 3.6V, 4.0V, 5.0V</math>.</li> <li>3: <math>TC V_{OUT} = \frac{(V_{OUTMAX} - V_{OUTMIN}) \times 10^6}{V_{OUT} \times \Delta T}</math></li> <li>4: Regulation is measured at a constant junction temperature using low duty cycle pulse testing. Load regulation is tested over a load range from 1.0 mA to the maximum specified output current. Changes in output voltage due to heating effects are covered by the thermal regulation specification.</li> <li>5: Dropout voltage is defined as the input to output differential at which the output voltage drops 2% below its nominal value at a 1V differential.</li> <li>6: Thermal Regulation is defined as the change in output voltage at a time T after a change in power dissipation is applied, excluding load or line regulation effects. Specifications are for a current pulse equal to <math>I_{LMAX}</math> at <math>V_{IN} = 6V</math> for T = 10 msec.</li> <li>7: The maximum allowable power dissipation is a function of ambient temperature, the maximum allowable junction temperature and the thermal resistance from junction-to-air (i.e., <math>T_A, T_J, \theta_{JA}</math>). Exceeding the maximum allowable power dissipation causes the device to initiate thermal shutdown. Please see <b>Section 4.0 "Thermal Considerations"</b> for more details.</li> <li>8: Apply for Junction Temperatures of <math>-40^\circ C</math> to <math>+85^\circ C</math>.</li> </ol> |                           |     |     |     |                 |        |                                                                    |

## 2.0 PIN DESCRIPTIONS

The descriptions of the pins are listed in Table 2-1.

**TABLE 2-1: PIN FUNCTION TABLE**


| Pin No.<br>(5-Pin SOT-23A) | Symbol                   | Description                                                                                                                                                                                                                                                                                                                      |
|----------------------------|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                          | $V_{IN}$                 | Unregulated supply input.                                                                                                                                                                                                                                                                                                        |
| 2                          | GND                      | Ground terminal.                                                                                                                                                                                                                                                                                                                 |
| 3                          | $\overline{\text{SHDN}}$ | Shutdown control input. The regulator is fully enabled when a logic high is applied to this input. The regulator enters shutdown when a logic low is applied to this input. During shutdown, output voltage falls to zero, $\overline{\text{ERROR}}$ is open circuited and supply current is reduced to 0.5 $\mu\text{A}$ (max). |
| 4                          | Bypass                   | Reference bypass input. Connecting a 470 pF to this input further reduces output noise.                                                                                                                                                                                                                                          |
| 5                          | $V_{OUT}$                | Regulated voltage output.                                                                                                                                                                                                                                                                                                        |

# TC1014/TC1015/TC1185

## 3.0 DETAILED DESCRIPTION

The TC1014/TC1015/TC1185 are precision fixed output voltage regulators. (If an adjustable version is desired, please see the TC1070/TC1071/TC1187 data sheet.) Unlike bipolar regulators, the TC1014/TC1015/TC1185 supply current does not increase with load current. In addition,  $V_{OUT}$  remains stable and within regulation over the entire 0 mA to  $I_{OUTMAX}$  operating load current ranges (an important consideration in RTC and CMOS RAM battery back-up applications).

Figure 3-1 shows a typical application circuit. The regulator is enabled any time the shutdown input (SHDN) is at or above  $V_{IH}$ , and shutdown (disabled) when SHDN is at or below  $V_{IL}$ . SHDN may be controlled by a CMOS logic gate, or I/O port of a microcontroller. If the SHDN input is not required, it should be connected directly to the input supply. While in shutdown, supply current decreases to 0.05  $\mu$ A (typical),  $V_{OUT}$  falls to zero volts.

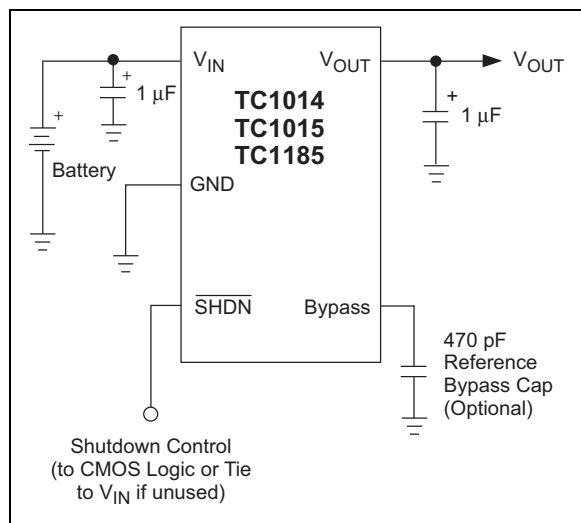

**FIGURE 3-1:** Typical Application Circuit

## 3.1 Bypass Input

A 470 pF capacitor connected from the Bypass input to ground reduces noise present on the internal reference, which in turn significantly reduces output noise. If output noise is not a concern, this input may be left unconnected. Larger capacitor values may be used, but results in a longer time period to rated output voltage when power is initially applied.

## 3.2 Output Capacitor

A 1  $\mu$ F (min) capacitor from  $V_{OUT}$  to ground is required. The output capacitor should have an effective series resistance greater than 0.1 $\Omega$  and less than 5 $\Omega$ . A 1  $\mu$ F capacitor should be connected from  $V_{IN}$  to GND if there is more than 10 inches of wire between the regulator and the AC filter capacitor, or if a battery is used as the power source. Aluminum electrolytic or tantalum capacitor types can be used. (Since many aluminum electrolytic capacitors freeze at approximately -30°C, solid tantalums are recommended for applications operating below -25°C.) When operating from sources other than batteries, supply-noise rejection and transient response can be improved by increasing the value of the input and output capacitors and employing passive filtering techniques.

## 4.0 THERMAL CONSIDERATIONS

### 4.1 Thermal Shutdown

Integrated thermal protection circuitry shuts the regulator off when die temperature exceeds 160°C. The regulator remains off until the die temperature drops to approximately 150°C.

### 4.2 Power Dissipation

The amount of power the regulator dissipates is primarily a function of input and output voltage, and output current. The following equation is used to calculate worst-case actual power dissipation:

#### EQUATION 4-1:

$$P_D \approx (V_{INMAX} - V_{OUTMIN})I_{LOADMAX}$$

Where:

$P_D$  = Worst-case actual power dissipation  
 $V_{INMAX}$  = Maximum voltage on  $V_{IN}$   
 $V_{OUTMIN}$  = Minimum regulator output voltage  
 $I_{LOADMAX}$  = Maximum output (load) current

The maximum allowable power dissipation (Equation 4-2) is a function of the maximum ambient temperature ( $T_{AMAX}$ ), the maximum allowable die temperature ( $T_{JMAX}$ ) and the thermal resistance from junction-to-air ( $\theta_{JA}$ ). The 5-Pin SOT-23A package has a  $\theta_{JA}$  of approximately 220°C/Watt.

#### EQUATION 4-2:

$$P_{DMAX} = \frac{(T_{JMAX} - T_{AMAX})}{\theta_{JA}}$$

Where all terms are previously defined.

Equation 4-1 can be used in conjunction with Equation 4-2 to ensure regulator thermal operation is within limits. For example:

Given:

$$V_{INMAX} = 3.0V + 10\%$$

$$V_{OUTMIN} = 2.7V - 2.5\%$$

$$I_{LOADMAX} = 40 \text{ mA}$$

$$T_{JMAX} = 125^\circ\text{C}$$

$$T_{AMAX} = 55^\circ\text{C}$$

Find: 1. Actual power dissipation  
2. Maximum allowable dissipation

Actual power dissipation:

$$\begin{aligned} P_D &\approx (V_{INMAX} - V_{OUTMIN})I_{LOADMAX} \\ &= [(3.0 \times 1.1) - (2.7 \times .975)]40 \times 10^{-3} \\ &= 26.7 \text{ mW} \end{aligned}$$

Maximum allowable power dissipation:

$$\begin{aligned} P_{DMAX} &= \frac{(T_{JMAX} - T_{AMAX})}{\theta_{JA}} \\ &= \frac{(125 - 55)}{220} \\ &= 318 \text{ mW} \end{aligned}$$

In this example, the TC1014 dissipates a maximum of 26.7 mW; below the allowable limit of 318 mW. In a similar manner, Equation 4-1 and Equation 4-2 can be used to calculate maximum current and/or input voltage limits.

### 4.3 Layout Considerations







The primary path of heat conduction out of the package is via the package leads. Therefore, layouts having a ground plane, wide traces at the pads, and wide power supply bus lines combine to lower  $\theta_{JA}$  and therefore increase the maximum allowable power dissipation limit.

# TC1014/TC1015/TC1185

## 5.0 TYPICAL CHARACTERISTICS

(Unless Otherwise Specified, All Parts Are Measured At Temperature = 25°C)






**Note:** The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

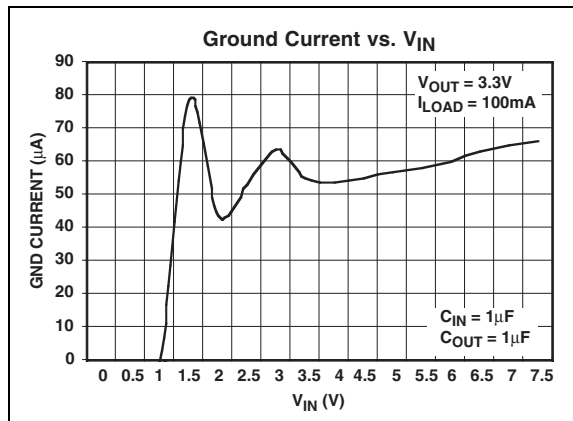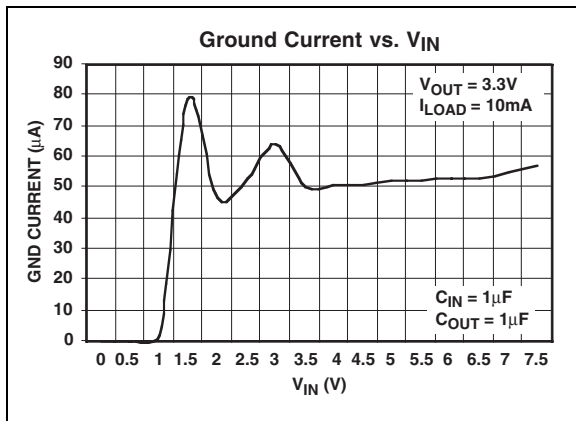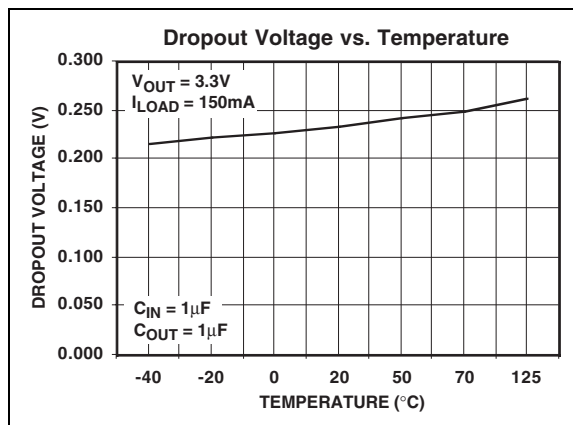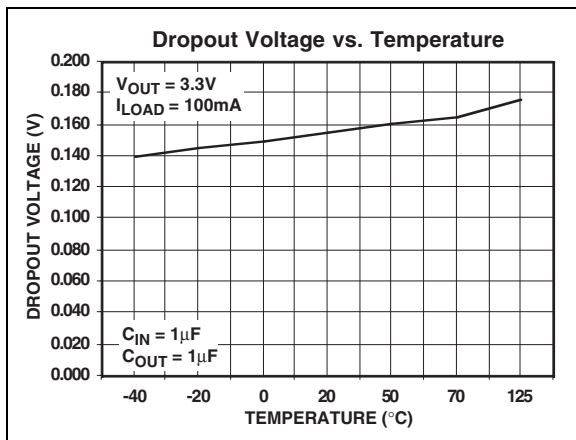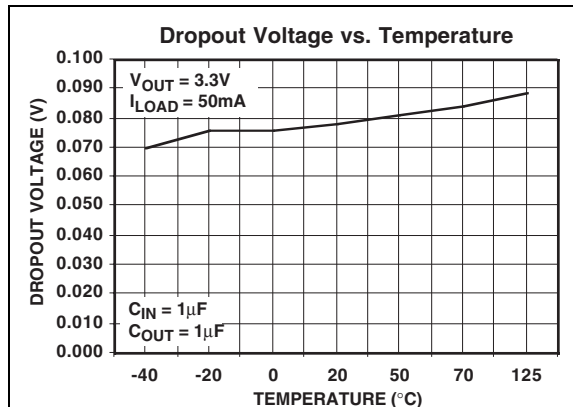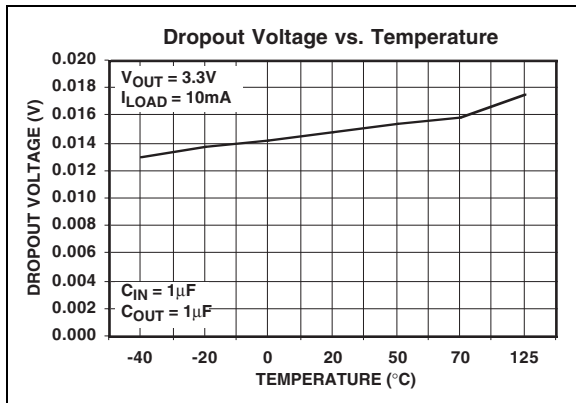



## 5.0 TYPICAL CHARACTERISTICS (CONTINUED)








(Unless Otherwise Specified, All Parts Are Measured At Temperature = 25°C)

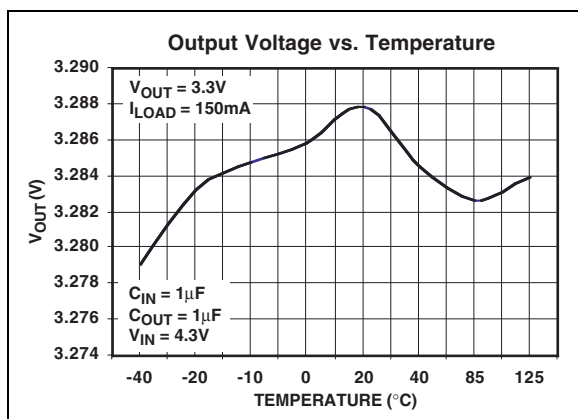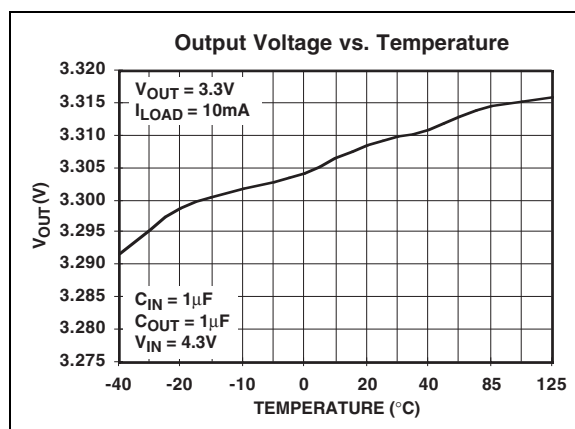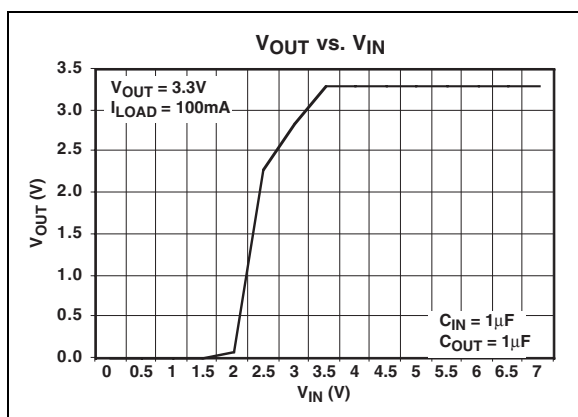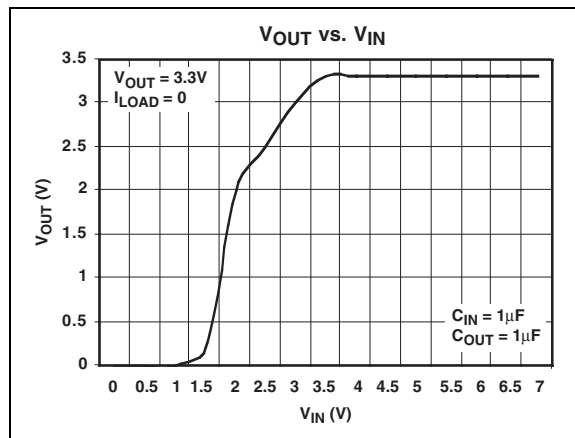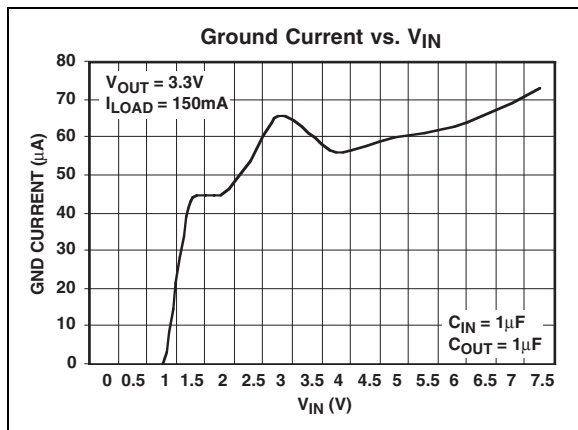

# TC1014/TC1015/TC1185

## 5.0 TYPICAL CHARACTERISTICS (CONTINUED)


(UNLESS OTHERWISE SPECIFIED, ALL PARTS ARE MEASURED AT TEMPERATURE = 25°C)

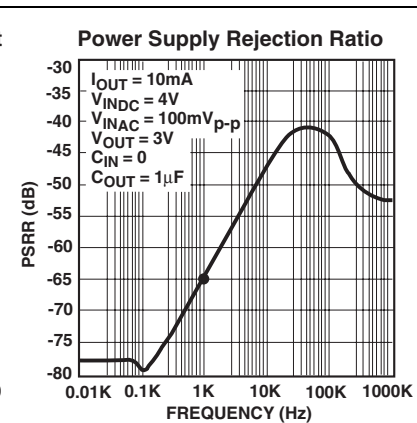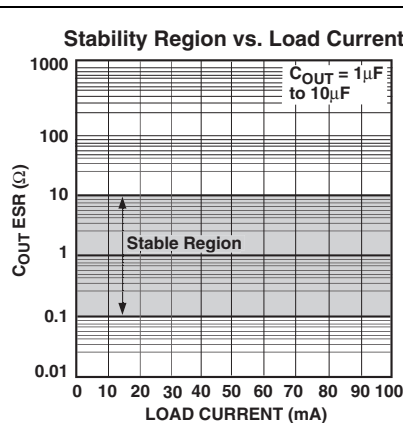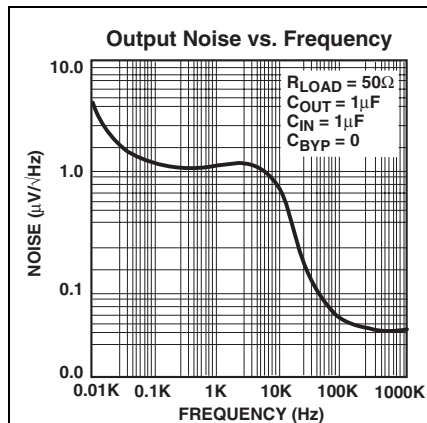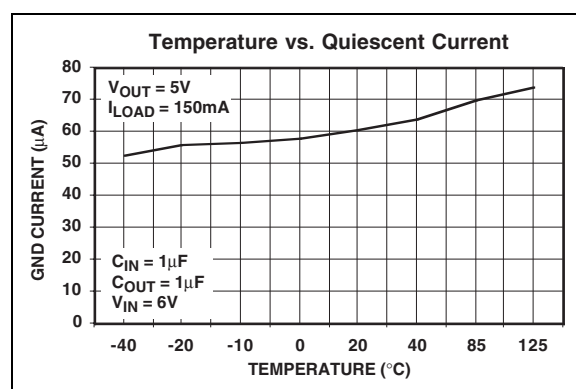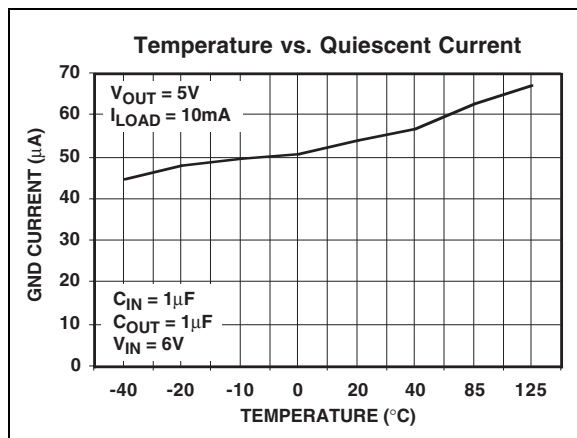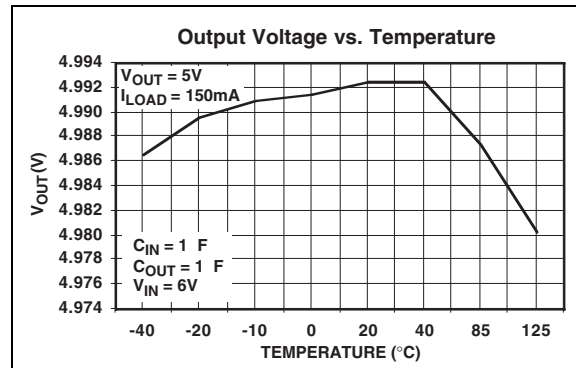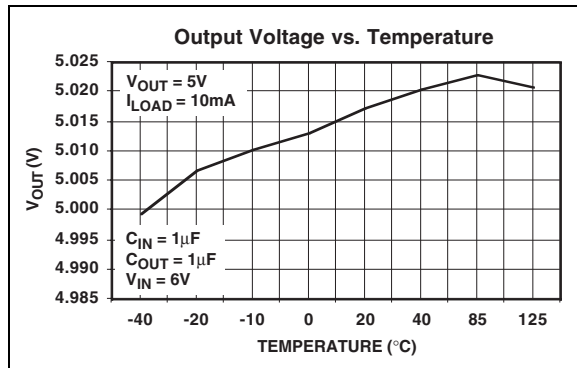

## 5.0 TYPICAL CHARACTERISTICS (CONTINUED)


### Measure Rise Time of 3.3V LDO With Bypass Capacitor

Conditions:  $C_{IN} = 1\mu F$ ,  $C_{OUT} = 1\mu F$ ,  $C_{BYP} = 470pF$ ,  $I_{LOAD} = 100mA$   
 $V_{IN} = 4.3V$ , Temp = 25°C, Rise Time = 448 $\mu s$

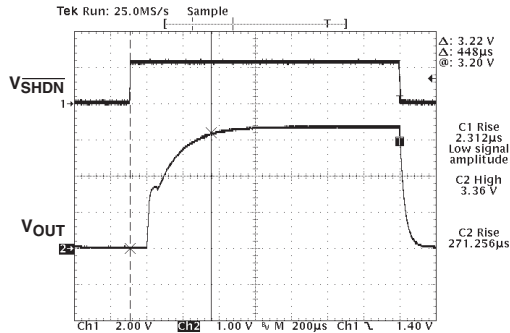


### Measure Rise Time of 3.3V LDO Without Bypass Capacitor

Conditions:  $C_{IN} = 1\mu F$ ,  $C_{OUT} = 1\mu F$ ,  $C_{BYP} = 0pF$ ,  $I_{LOAD} = 100mA$   
 $V_{IN} = 4.3V$ , Temp = 25°C, Rise Time = 184 $\mu s$

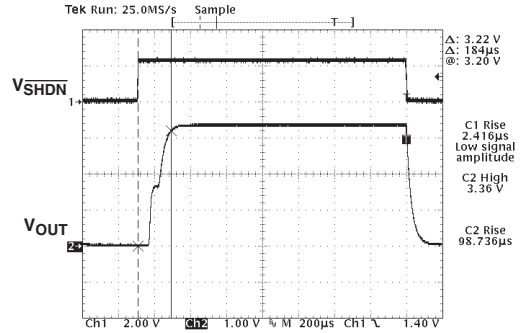


### Measure Fall Time of 3.3V LDO With Bypass Capacitor

Conditions:  $C_{IN} = 1\mu F$ ,  $C_{OUT} = 1\mu F$ ,  $C_{BYP} = 470pF$ ,  $I_{LOAD} = 50mA$   
 $V_{IN} = 4.3V$ , Temp = 25°C, Fall Time = 100 $\mu s$

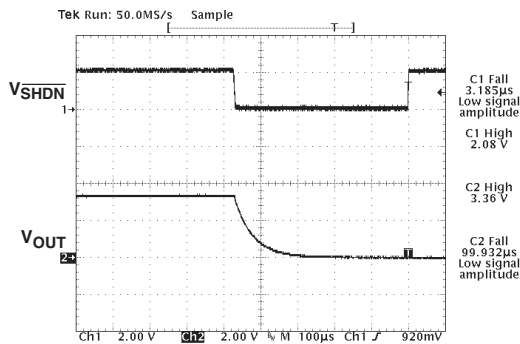

### Measure Fall Time of 3.3V LDO Without Bypass Capacitor

Conditions:  $C_{IN} = 1\mu F$ ,  $C_{OUT} = 1\mu F$ ,  $C_{BYP} = 0pF$ ,  $I_{LOAD} = 100mA$   
 $V_{IN} = 4.3V$ , Temp = 25°C, Fall Time = 52 $\mu s$

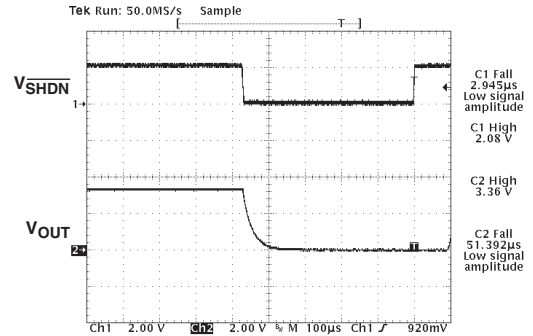


# TC1014/TC1015/TC1185

## 5.0 TYPICAL CHARACTERISTICS (CONTINUED)


### Measure Rise Time of 5.0V LDO With Bypass Capacitor

Conditions:  $C_{IN} = 1\mu F$ ,  $C_{OUT} = 1\mu F$ ,  $C_{BYP} = 470pF$ ,  $I_{LOAD} = 100mA$   
 $V_{IN} = 6V$ , Temp = 25°C, Rise Time = 390 $\mu s$

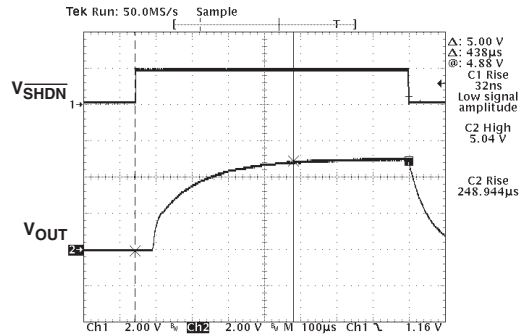


### Measure Rise Time of 5.0V LDO Without Bypass Capacitor

Conditions:  $C_{IN} = 1\mu F$ ,  $C_{OUT} = 1\mu F$ ,  $C_{BYP} = 0pF$ ,  $I_{LOAD} = 100mA$   
 $V_{IN} = 6V$ , Temp = 25°C, Rise Time = 192 $\mu s$

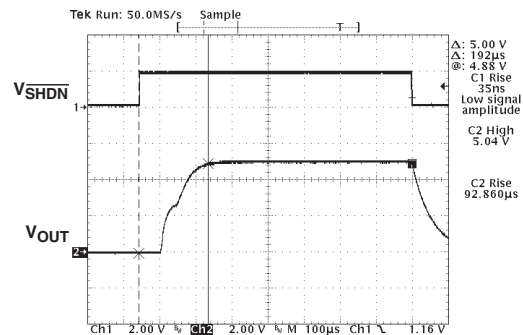


### Measure Fall Time of 5.0V LDO With Bypass Capacitor

Conditions:  $C_{IN} = 1\mu F$ ,  $C_{OUT} = 1\mu F$ ,  $C_{BYP} = 470pF$ ,  $I_{LOAD} = 50mA$   
 $V_{IN} = 6V$ , Temp = 25°C, Fall Time = 167 $\mu s$




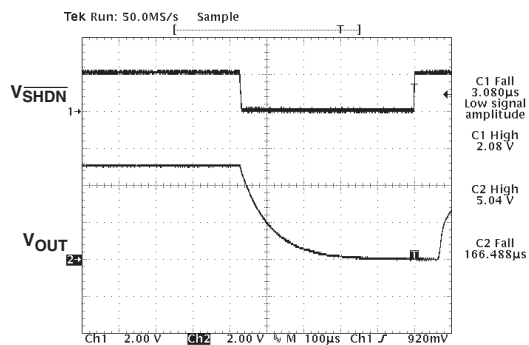


### Measure Fall Time of 5.0V LDO Without Bypass Capacitor

Conditions:  $C_{IN} = 1\mu F$ ,  $C_{OUT} = 1\mu F$ ,  $C_{BYP} = 0pF$ ,  $I_{LOAD} = 100mA$   
 $V_{IN} = 6V$ , Temp = 25°C, Fall Time = 88 $\mu s$


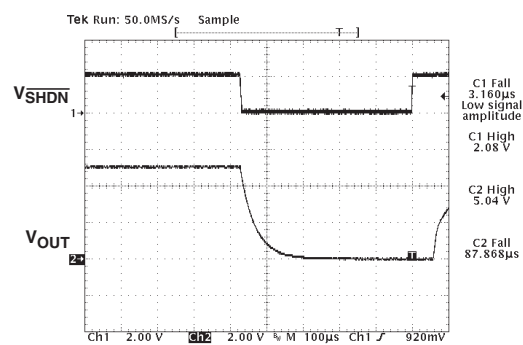


## 5.0 TYPICAL CHARACTERISTICS (CONTINUED)

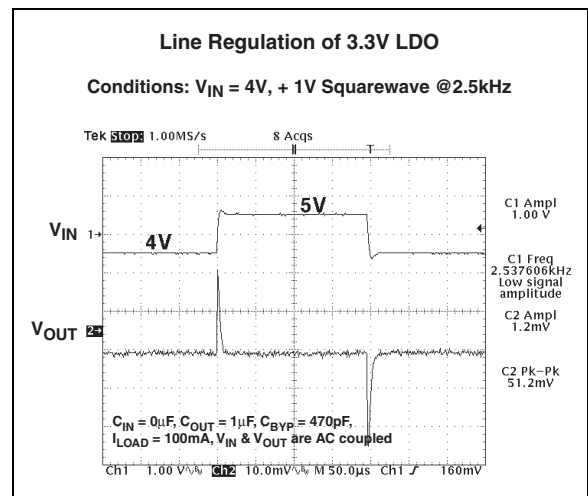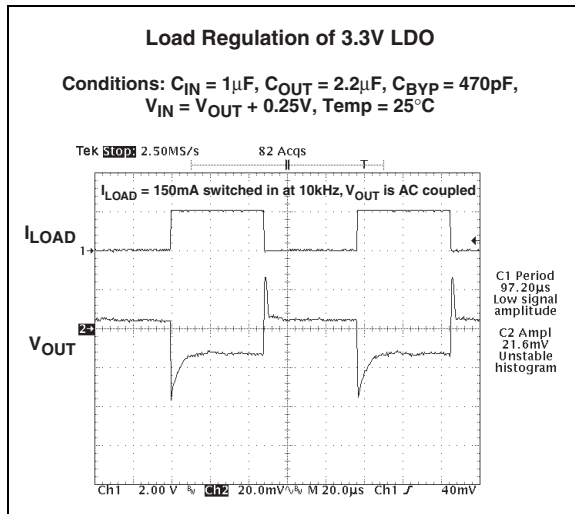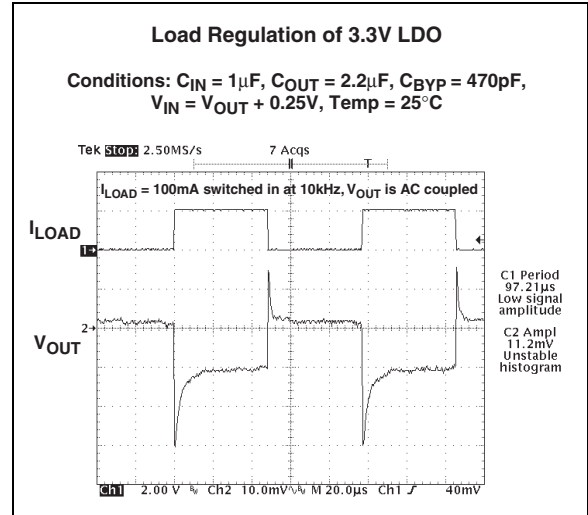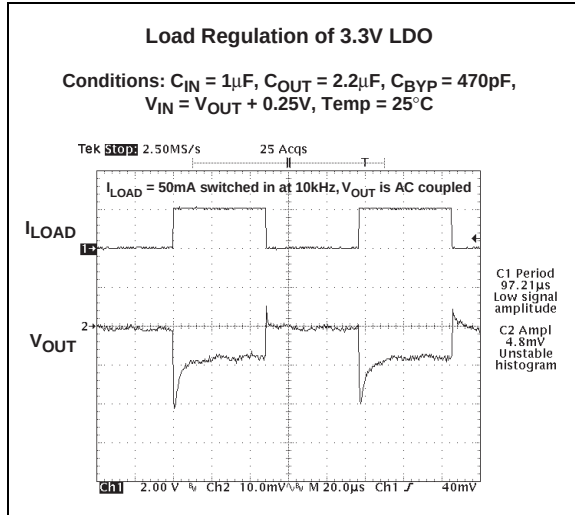


# TC1014/TC1015/TC1185

## 5.0 TYPICAL CHARACTERISTICS (CONTINUED)

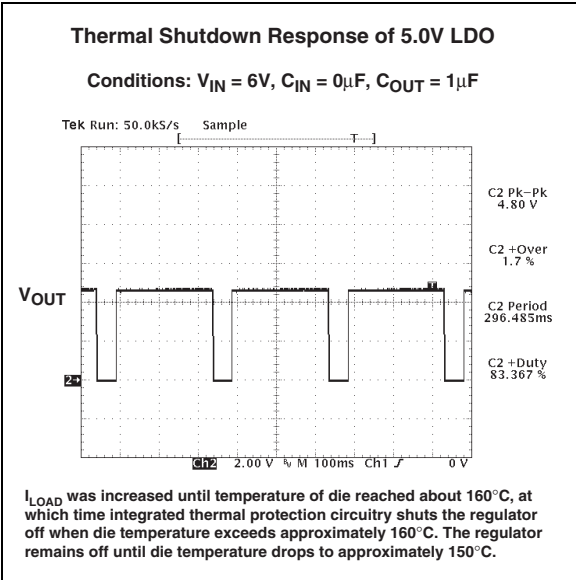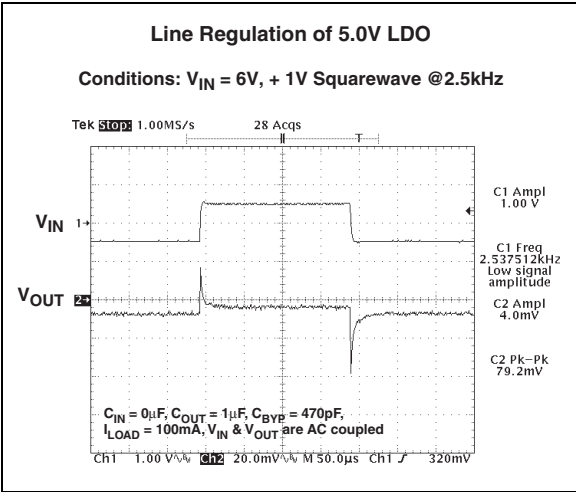

## 6.0 PACKAGING INFORMATION

### 6.1 Package Marking Information

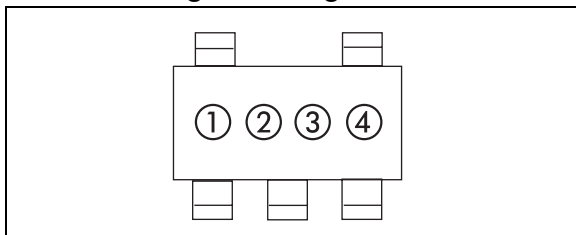

“1” & “2” = part number code + temperature range and voltage


| (V)  | TC1014 Code | TC1015 Code | TC1185 Code |
|------|-------------|-------------|-------------|
| 1.8  | AY          | BY          | NY          |
| 2.5  | A1          | B1          | N1          |
| 2.6  | NB          | BT          | NT          |
| 2.7  | A2          | B2          | N2          |
| 2.8  | AZ          | BZ          | NZ          |
| 2.85 | A8          | B8          | N8          |
| 3.0  | A3          | B3          | N3          |
| 3.3  | A5          | B5          | N5          |
| 3.6  | A9          | B9          | N9          |
| 4.0  | A0          | B0          | N0          |
| 5.0  | A7          | B7          | N7          |

“3” represents date code

“4” represents lot ID number

### 6.2 Taping Form

#### Component Taping Orientation for 5-Pin SOT-23A (EIAJ SC-74A) Devices

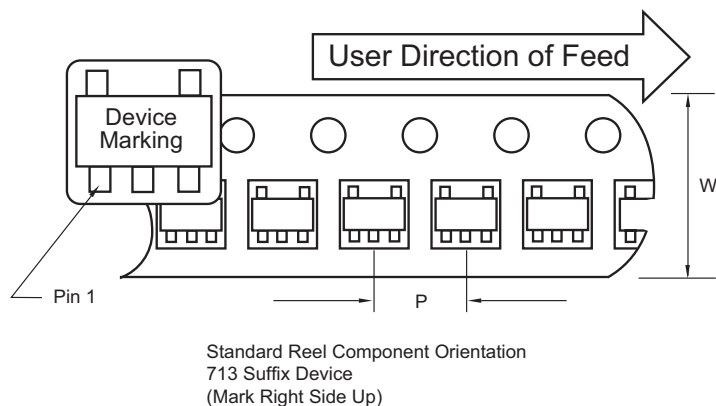


#### Carrier Tape, Number of Components Per Reel and Reel Size

| Package       | Carrier Width (W) | Pitch (P) | Part Per Full Reel | Reel Size |
|---------------|-------------------|-----------|--------------------|-----------|
| 5-Pin SOT-23A | 8 mm              | 4 mm      | 3000               | 7 in      |

# TC1014/TC1015/TC1185

## 6.3 Package Dimensions

### SOT-23A-5

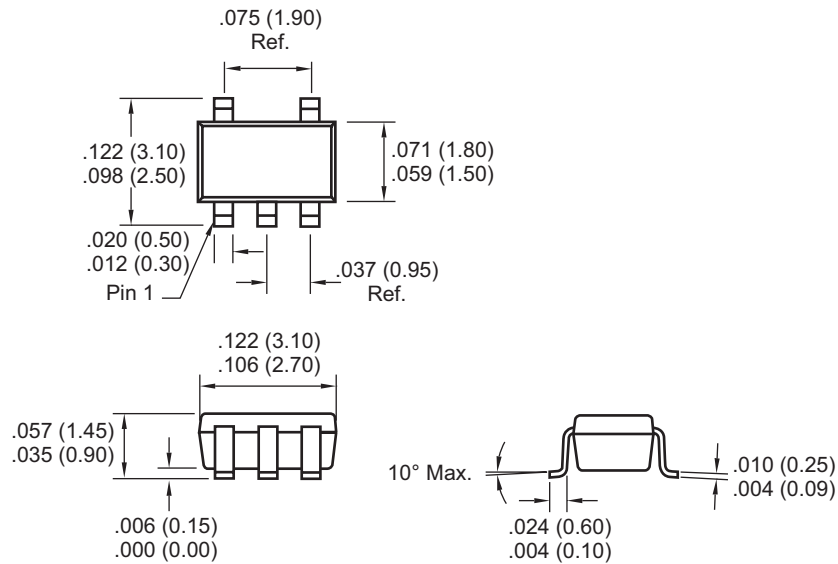

Dimensions: inches (mm)



## **Sales and Support**

### **Data Sheets**

Products supported by a preliminary Data Sheet may have an errata sheet describing minor operational differences and recommended workarounds. To determine if an errata sheet exists for a particular device, please contact one of the following:

1. Your local Microchip sales office
2. The Microchip Corporate Literature Center U.S. FAX: (480) 792-7277
3. The Microchip Worldwide Site ([www.microchip.com](http://www.microchip.com))

Please specify which device, revision of silicon and Data Sheet (include Literature #) you are using.

### **New Customer Notification System**

Register on our web site ([www.microchip.com/cn](http://www.microchip.com/cn)) to receive the most current information on our products.

# TC1014/TC1015/TC1185

---

NOTES:

---

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

---

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip's products as critical components in life support systems is not authorized except with express written approval by Microchip. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

#### **Trademarks**

The Microchip name and logo, the Microchip logo, Accuron, dsPIC, KEELoQ, microID, MPLAB, PIC, PICmicro, PICSTART, PRO MATE, PowerSmart, rfPIC, and SmartShunt are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AmpLab, FilterLab, Migratable Memory, MXDEV, MXLAB, PICMASTER, SEEVAL, SmartSensor and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, Application Maestro, dsPICDEM, dsPICDEM.net, dsPICworks, ECAN, ECONOMONITOR, FanSense, FlexROM, fuzzyLAB, In-Circuit Serial Programming, ICSP, ICEPIC, Linear Active Thermistor, MPASM, MPLIB, MPLINK, MPSIM, PICkit, PICDEM, PICDEM.net, PICLAB, PICtail, PowerCal, PowerInfo, PowerMate, PowerTool, Real ICE, rLAB, rfPICDEM, Select Mode, Smart Serial, SmartTel, Total Endurance, UNI/O, WiperLock and Zena are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

All other trademarks mentioned herein are property of their respective companies.

© 2006, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

 Printed on recycled paper.

**QUALITY MANAGEMENT SYSTEM**  
**CERTIFIED BY DNV**  
**== ISO/TS 16949:2002 ==**

*Microchip received ISO/TS-16949:2002 quality system certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona and Mountain View, California in October 2003. The Company's quality system processes and procedures are for its PICmicro® 8-bit MCUs, KEELoQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.*



## WORLDWIDE SALES AND SERVICE

### AMERICAS

**Corporate Office**  
2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://support.microchip.com>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

#### Atlanta

Alpharetta, GA  
Tel: 770-640-0034  
Fax: 770-640-0307

#### Boston

Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

#### Chicago

Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

#### Dallas

Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

#### Detroit

Farmington Hills, MI  
Tel: 248-538-2250  
Fax: 248-538-2260

#### Kokomo

Kokomo, IN  
Tel: 765-864-8360  
Fax: 765-864-8387

#### Los Angeles

Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608

#### San Jose

Mountain View, CA  
Tel: 650-215-1444  
Fax: 650-961-0286

#### Toronto

Mississauga, Ontario,  
Canada  
Tel: 905-673-0699  
Fax: 905-673-6509

### ASIA/PACIFIC

**Australia - Sydney**  
Tel: 61-2-9868-6733  
Fax: 61-2-9868-6755

**China - Beijing**  
Tel: 86-10-8528-2100  
Fax: 86-10-8528-2104

**China - Chengdu**  
Tel: 86-28-8676-6200  
Fax: 86-28-8676-6599

**China - Fuzhou**  
Tel: 86-591-8750-3506  
Fax: 86-591-8750-3521

**China - Hong Kong SAR**  
Tel: 852-2401-1200  
Fax: 852-2401-3431

**China - Qingdao**  
Tel: 86-532-8502-7355  
Fax: 86-532-8502-7205

**China - Shanghai**  
Tel: 86-21-5407-5533  
Fax: 86-21-5407-5066

**China - Shenyang**  
Tel: 86-24-2334-2829  
Fax: 86-24-2334-2393

**China - Shenzhen**  
Tel: 86-755-8203-2660  
Fax: 86-755-8203-1760

**China - Shunde**  
Tel: 86-757-2839-5507  
Fax: 86-757-2839-5571

**China - Wuhan**  
Tel: 86-27-5980-5300  
Fax: 86-27-5980-5118

**China - Xian**  
Tel: 86-29-8833-7250  
Fax: 86-29-8833-7256

### ASIA/PACIFIC

**India - Bangalore**  
Tel: 91-80-2229-0061  
Fax: 91-80-2229-0062

**India - New Delhi**  
Tel: 91-11-5160-8631  
Fax: 91-11-5160-8632

**India - Pune**  
Tel: 91-20-2566-1512  
Fax: 91-20-2566-1513

**Japan - Yokohama**  
Tel: 81-45-471- 6166  
Fax: 81-45-471-6122

**Korea - Gumi**  
Tel: 82-54-473-4301  
Fax: 82-54-473-4302

**Korea - Seoul**  
Tel: 82-2-554-7200  
Fax: 82-2-558-5932 or  
82-2-558-5934

**Malaysia - Penang**  
Tel: 60-4-646-8870  
Fax: 60-4-646-5086

**Philippines - Manila**  
Tel: 63-2-634-9065  
Fax: 63-2-634-9069

**Singapore**  
Tel: 65-6334-8870  
Fax: 65-6334-8850

**Taiwan - Hsin Chu**  
Tel: 886-3-572-9526  
Fax: 886-3-572-6459

**Taiwan - Kaohsiung**  
Tel: 886-7-536-4818  
Fax: 886-7-536-4803

**Taiwan - Taipei**  
Tel: 886-2-2500-6610  
Fax: 886-2-2508-0102

**Thailand - Bangkok**  
Tel: 66-2-694-1351  
Fax: 66-2-694-1350

### EUROPE

**Austria - Wels**  
Tel: 43-7242-2244-399  
Fax: 43-7242-2244-393

**Denmark - Copenhagen**  
Tel: 45-4450-2828  
Fax: 45-4485-2829

**France - Paris**  
Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79

**Germany - Munich**  
Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44

**Italy - Milan**  
Tel: 39-0331-742611  
Fax: 39-0331-466781

**Netherlands - Drunen**  
Tel: 31-416-690399  
Fax: 31-416-690340

**Spain - Madrid**  
Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91

**UK - Wokingham**  
Tel: 44-118-921-5869  
Fax: 44-118-921-5820