
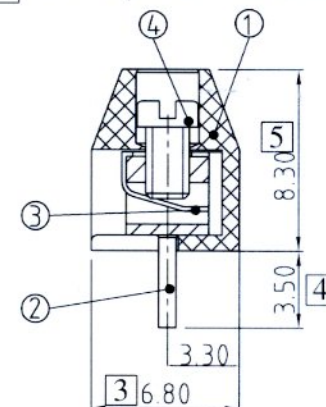
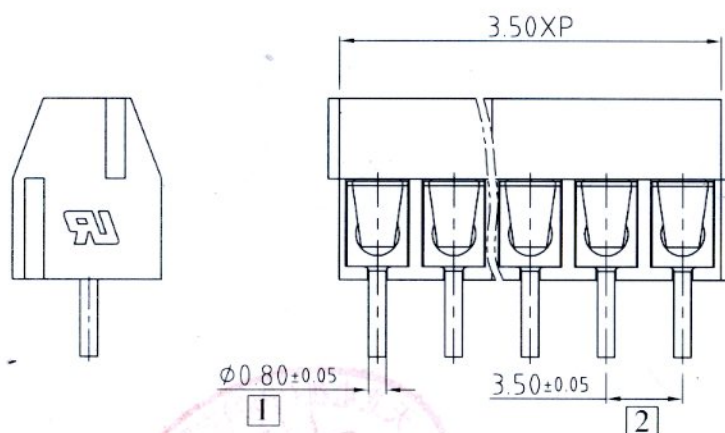


FILE TL001\TL001V-XP-XS

REV	CONTENT	CHK	DATE
V0.0	ORIGINAL		
V1.0	主体材料由PBT (G20) 改为PA66/6 (V0)	S.WEN	05/09/20
V2.0	扭力0.4Nm改为0.2Nm	XTB	08/08/13

NOTES:

- 1.Rating:300V 6A;(UL)
- 2.Insulation Withstands Voltage: AC2000V/MIN
- 3.Insulation Resistance: $\geq 500M\Omega$ or more at DC500V
- 4.Using Temperature Range: $-40^{\circ}C/+105^{\circ}C$
- 5.Screw Torque Value:0.2Nm
- 6.Suitable Electric Wire: 16-24AWG
- 7.RoHS compliance
- 8"□" the important dimension.

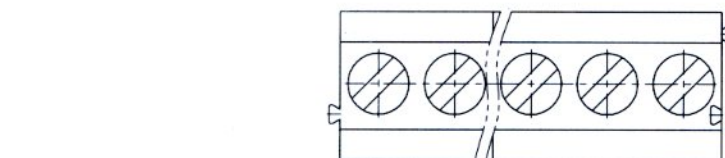

DIM	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
L	7	10.5	14	17.5	21	24.5	28	31.5	35	38.5	42	45.5	49	52.5	56	59.5	63	66.5	70	73.5	77	80.5	84
TOL(±)	0.05	0.05	0.07	0.08	0.1	0.12	0.14	0.15	0.17	0.19	0.21	0.22	0.24	0.26	0.28	0.29	0.31	0.33	0.35	0.36	0.38	0.40	0.42

4	SCREW	TL000001	P	STEEL	Zn Plated
3	SPRINGCOIL	TL001B0002	P	BRONZE	Ni Plated
2	SOLDERPIN	TL001B0003	P	BRASS	Sn Plated
1	HOUSING	TL001A10XX(2P) TL001A11XX(3P)	1	PA66/6(V0)	2P/3P

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	XSD DATE	2005/04/11	UNITS	MM	SHEET/OF 1/1
CHK.	DATE		SCALE	3:1	A4
APP.	DATE				
			NAME	TL001V-XP-XS	
			DWGNO.	TL-02-TL001VXPXS	

PICH ERROR	Nominal dimension rage in mm					radius	chamfer	short angle side						
±0.05/10	0.5	over 3	over 6	over 30	over 120	0.5	over 3	over 6	over 10	over 50	over 120	all	all	5
	to 3	to 6	to 30	to 120	to 480	to 3	to 6	to 30	to 10	to 50	to 120	all	all	5
	±0.1	±0.15	±0.2	±0.3	±0.5	±0.2	±0.5	1	1'	30'	20'	10'	0.2	0.5
														0.025
														0.06
														0.12
														0.4