
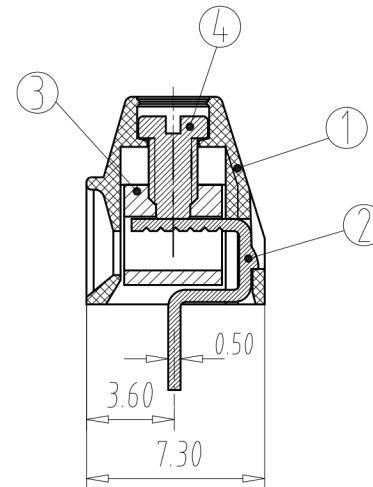
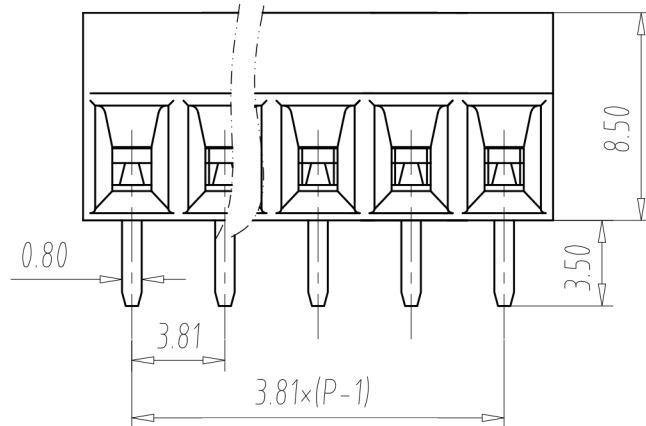


NOTES:

1. Rating: 300V 10A(UL); 130V 10A(IEC)
2. Insulation Withstands Voltage: AC1600V/MIN
3. Insulation Resistance: $\geq 500M\Omega$ or more at DC500V
4. Using Temperature Range: $-40^{\circ}\text{C}/+105^{\circ}\text{C}$
5. Screw Torque Value: 0.2Nm
6. Suitable Electric Wire: 26-16AWG(UL); 1.5mm²(IEC)
7. RoHS compliance

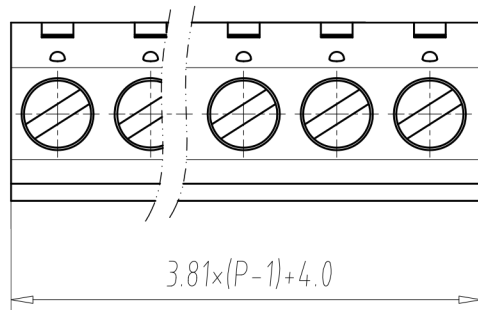

4	Screw	TLS00126	1	Steel	Zn plated
3	Block	TLX0007	1	Brass	Ni plated
2	Solder Pin	TL01A012	1	Brass	Sn plated
1	Housing	TL01BX13	1	PA66	UL94-V0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	WG	DATE	12.04.17	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE			
				NAME	TL-103V-XP-XS
				DWGNO.	TL-02-TL-103V-XP-XS

TIANLI
ELECTRICAL MACHINERY(NINGBO)CO.,LTD.

Pitch Tolerances in mm						Nominal dimension range in mm																			
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	all	over 0	over 100	over 150
to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 30	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10			to 100	to 150	to 150	
±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5					