
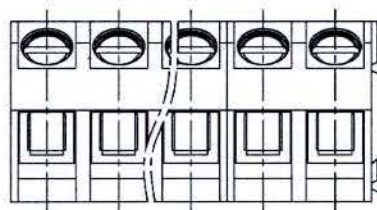






FILE: D02\TL02\

REV	CONTENT	CHK	DATE
V3.0	依实物修正图纸	陈小龙	11.11.02

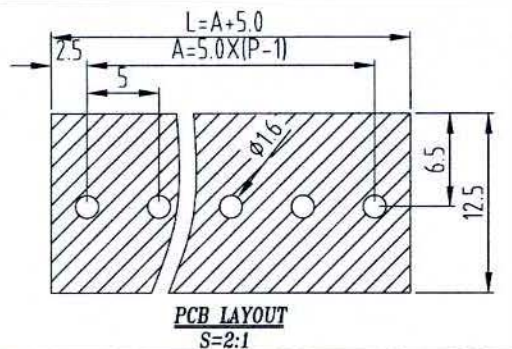

NOTES:

1. Rating: 250V (UL); 130V (VDE)
2. Test current: 16A (UL/VDE/CE)
3. Insulation Withstands Voltage: AC2000V/MIN
4. Insulation Resistance: $\geq 500M\Omega$ or more at DC500V
5. Using Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
6. Screw Torque Value: 0.4Nm
7. Suitable Electric Wire: 2.5MM² (VDE); 12-26AWG (UL);
8. RoHS Compliance.

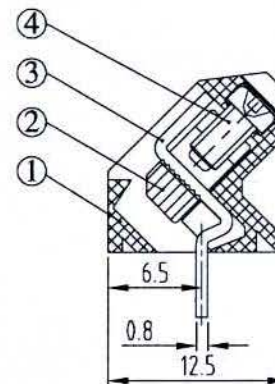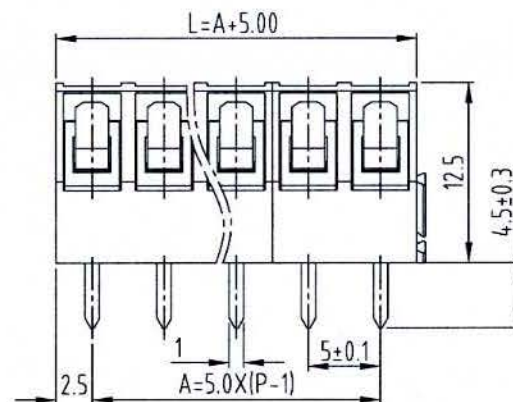

DIM	P	2	3	4	5	6	7	8	9	10	11	12	13
L		10	15	20	25	30	35	40	45	50	55	60	65
A		5	10	15	20	25	30	35	40	45	50	55	60
DIM	P	14	15	16	17	18	19	20	21	22	23	24	
L		70	75	80	85	90	95	100	105	110	115	120	
A		65	70	75	80	85	90	95	100	105	110	115	

PITCH ERROR		Nominal dimension range in mm					radius		chamfer		 short angle side										
±0.05/10	0.5	over	over	over	over	0.5	over	over	over	over	over	over	all	all	5	5	30	120			
	to	3	6	30	120	to	3	6	to	10	50	120									
	3	6	30	120	480	3	6	30	10	50	120	400									
±0.1	±0.15	±0.2	±0.3	±0.5	±0.2	±0.5	±1	1°	30'	20'	10'	0.2	0.5	0.025	0.06	0.12	0.4				

4	SCREW	TL500177	P	STEEL	Zn Plated				
3	SOLDERPIN	TL003B0012	P	BRASS	Sn Plated				
2	BLOCK	TLX00015	P	BRASS	Ni Plated				
1	HOUSING	TL003A50XX(2P)	1	PA66(V0)	2P/3P				
		TL003A51XX(3P)							
ITEM	NAME OF PART		NO. OF PART		Q'TY	MATERIAL		NOTE	
DWG.	陈小龙		DATE	11.11.02		UNITS	MM	SHEET/OF	1/1
CHK.	陈小龙		DATE	12.01.09		SCALE	2:1	A4	
APP.	王		DATE	12.01.09		NAME	TL204-XP-XS		
 TIANLI ELECTRICAL MACHINERY(NINGBO)CO.,LTD.									
						DWGNO:	TL-02-TL204XPXS		