

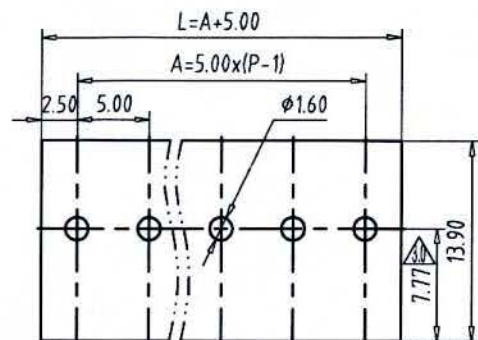

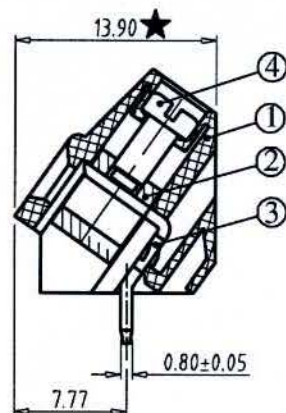
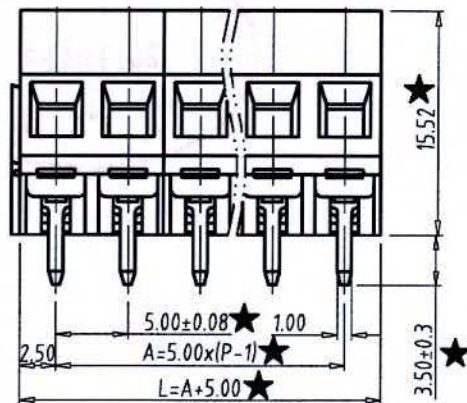


FILE: SheJi\2013-002\TL02\TL207\TL207-XP-XS



PCB LAYOUT
S=2:1

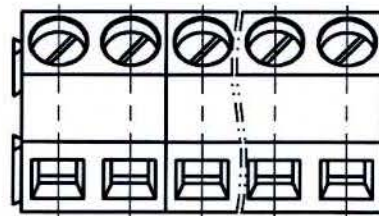

NOTES:

1. Rating:250V 12A(UL);
2. Insulation Withstands Voltage: AC2000V/MIN
3. Insulation Resistance: 500M Ω or more at DC500V
4. Using Temperature Range: -40°C--+105°C
5. Screw Torque Value:0.4Nm
6. Suitable Electric Wire: 24-12AWG
7. RoHS Compliance.

8. "★" is the important dimension.

DIM \ P	2	3	4	5	6	7	8	9	10	11	12	
L	10	15	20	25	30	35	40	45	50	55	60	
A	5	10	15	20	25	30	35	40	45	50	55	
DIM \ P	13	14	15	16	17	18	19	20	21	22	23	24
L	65	70	75	80	85	90	95	100	105	110	115	120
A	60	65	70	75	80	85	90	95	100	105	110	115

Total Pitch Tolerances										Nominal dimension range										⊥		=		—		//	
in mm										in mm																	
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over				
0	30	53	70	90	115	150	200	250	30	30	53	70	90	115	150	200	250	30	over	0	100	over					
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	10	all	to	to					
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10			100	150					
±0.18	±0.20	±0.25	±0.3	±0.35	±0.4	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.4	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5				

4	SCREW	TLS00013	P	STEEL	M2.5/Zn Plated
3	SOLDERPIN	TL003B0080	P	BRASS	Tin Plated
2	BLOCK	TLX00001	P	BRASS	Ni Plated
1	HOUSING	TL003A90XX(2P) TL003A91XX(3P)	PA66(V0)		
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LJZ	DATE	13.02.23	UNITS	mm
CHK.		DATE	2013.1.29	SCALE	2:1
APP.		DATE			
International Connect U.S.A				NAME	TL207-XP-XS
				DWGNO.	TL-02-TL207XPXS0