
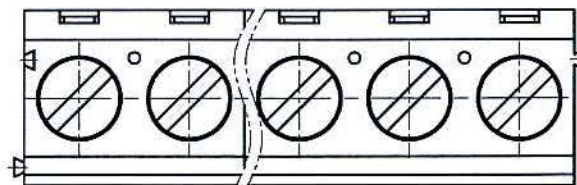





FILE: TL02

REV	E.CN NO.	CONTENT	CHK	DATE
V1.0		ORIGINAL	LYJ	05.04.20
V2.0		整理图面	唐麒贤	12.08.09

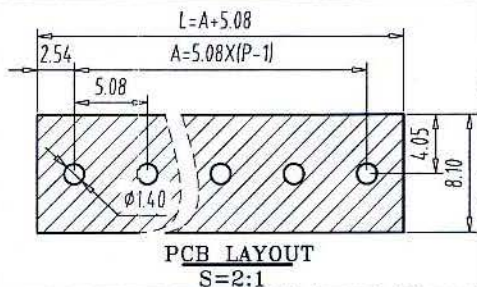

NOTES:

1. Rating: 300V 10A (UL);
2. Insulation Withstands Voltage: AC2000V/MIN
3. Insulation Resistance: $\geq 500\text{M}\Omega$ or more at DC500V
4. Using Temperature Range: $-40^\circ\text{C} \sim +105^\circ\text{C}$
5. Screw Torque Value: 0.4Nm
6. Suitable Electric Wire: 16-26AWG
7. RoHS Compliance.

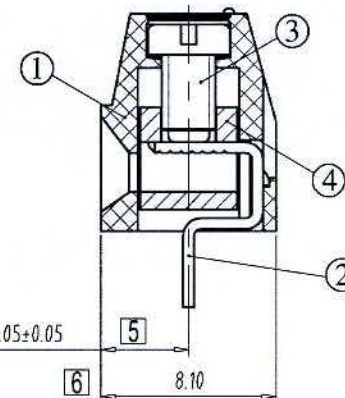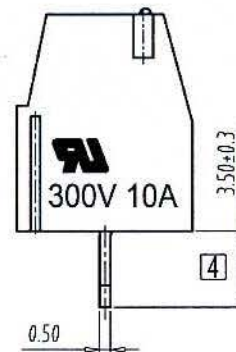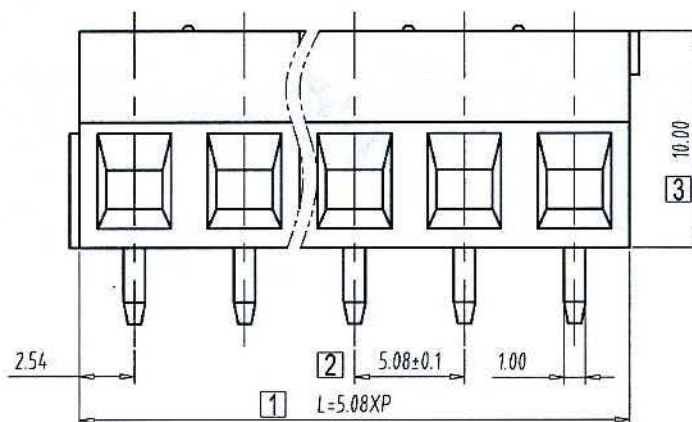

DIM	P	2	3	4	5	6	7	8	9	10	11	12	
L		10.16	15.24	20.32	25.4	30.48	35.56	40.64	45.72	50.8	55.88	60.96	
TOL(±)		0.05	0.08	0.10	0.13	0.15	0.18	0.20	0.23	0.25	0.28	0.30	
DIM	P	13	14	15	16	17	18	19	20	21	22	23	24
L		66.04	71.12	76.2	81.28	86.36	91.44	96.52	101.6	106.68	111.76	116.84	121.92
TOL(±)		0.33	0.35	0.38	0.40	0.43	0.45	0.48	0.50	0.53	0.55	0.58	0.60

Total Pitch Tolerances										Nominal dimension range																		
in mm										in mm																		
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	10	all	0	100	150
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	10	all	0	100	150	
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.3	0.2	0.3	0.5				

4	BLOCK	TLX00002	P	BRASS	Ni Plated		
3	SCREW	TL500015	P	STEEL	Zn Plated		
2	SOLDER PIN	TL003B0023	P	BRASS	Sn Plated		
1	HOUSING	TL004A40XX(2P)	1	PA66(V0)	2P/3P		
		TL004A41XX(3P)					
ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL	NOTE	
DWG.	LYJ	DATE	05.04.20	UNITS	MM	SHEET/OF	1/1
CHK.		DATE	12.08.09	SCALE	3:1	A4	
APP.		DATE	2008.8.9	NAME	TL308V-XP-XS		
 TIANLI ELECTRICAL MACHINERY (NINGBO) CO., LTD.				DWGNO	TL-02-TL308VXPXS		