
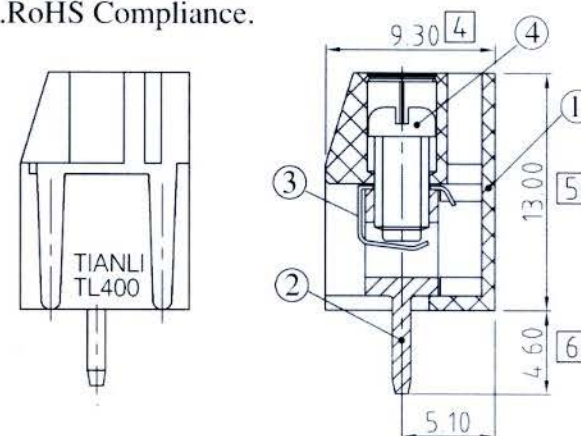


FILE TL001\TL001A1001

REV	CONTENT	CHK	DATE
V0.0	ORIGINAL	CHK	DATE
V1.0	材质由PBT (G20) 修改为PA66 6 (V0); 加设卡环	S.WEN	06/02/09
V2.0	更改螺丝	XTB	08.08.15

NOTES:

1. Rating:300V 16A;
2. Insulation Withstands Voltage: AC2000V/MIN
3. Insulation Resistance: $\geq 500M\Omega$ or more at DC500V
4. Using Temperature Range: $-30^{\circ}C$ -- $+105^{\circ}C$
5. Screw Torque Value:0.6Nm
6. Suitable Electric Wire: 14-22AWG
7. "□" the important dimension.
- 8.RoHS Compliance.

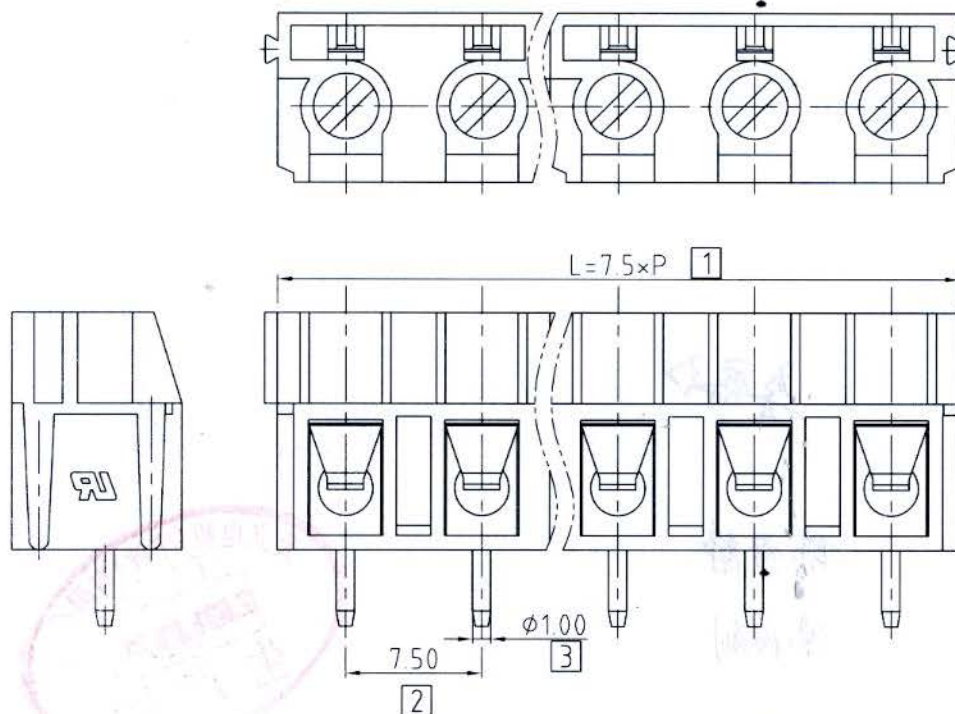

DIM	P	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
L		15	22.5	30	37.5	45	52.5	60	67.5	75	82.5	90	97.5	105	112.5	120	127.5	135	142.5	150	157.5	165	172.5	180
TOL(±)		0.08	0.11	0.15	0.18	0.22	0.26	0.30	0.34	0.38	0.41	0.45	0.49	0.53	0.56	0.60	0.64	0.68	0.71	0.75	0.79	0.83	0.86	0.90

4	SCREW	TLS00003	△	P	STEEL	Zn Plated
3	SPRING COIL	TL003B0001		P	BRONZE	Ni Plated
2	SOLDER PIN	TL003B0002		P	BRASS	Sn Plated
1	HOUSING	TL005A01XX(2P) TL005A02XX(3P)		P	PA66/6(V0)	2P/3P

PICH ERROR	Nominal dimension rage in mm				radius	chamfer	short angle side			÷	—	□	//
±0.05/10	0.5	3	over	over	0.5	over	over	over	all	all	5	30	120
	to	to	to	to	to	to	to	to			to	to	to
	3	6	30	120	480	3	6	30	10	50	120	400	
	±0.1	±0.15	±0.2	±0.3	±0.5	±0.2	±0.5	1	1'	30'	20'	10'	0.2
									0.5	0.025	0.06	0.12	0.4

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	DWG	DATE	UNITS	MM	SHEET/OF 1/1
CHK.	DATE		SCALE	1:1	A4
APP.	DATE				
	TIANLI		NAME	TL400V-XP-XS	
	ELECTRICAL MACHINERY(NINGBO)CO.,LTD.		DWGNO.	TL-01-TL001A1001	