


Terminal Strip — TLB series — TLB-100HW

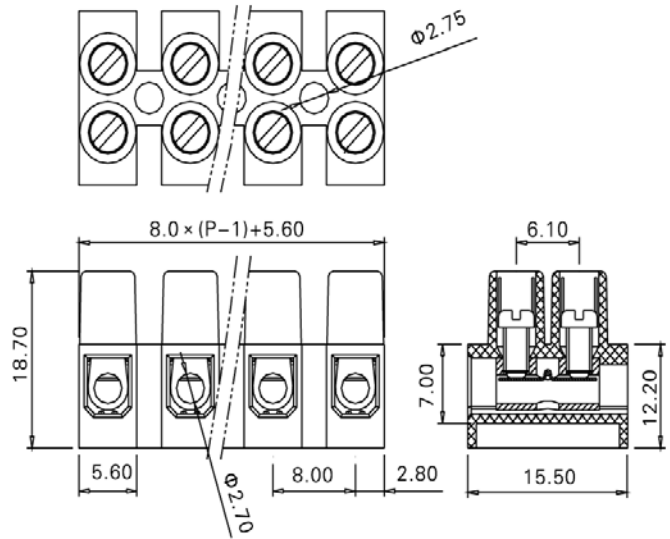

■ 图示(Pic. shown) : TLB-100HW-12P-T01S

General.	Terminal Strip	Rated : 450V, 24A , 2.5mm ²
	8.00mm pitch , 02-12 Pole	
	Wire-to-Wire Connection	
	Screw clamp unit: M2.5, 0.4Nm Max	

认证 (Approval) :



技术参数 Technical Data	UL standard			IEC standard		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	150V	300V	--	450V	--
额定电流(Rated current)	20A	20A	10A	--	24A	--
额定连接容量(Rated connection capacity)	24-12AWG Sol&Str			0.75-2.5mm ²		
绝缘材料(Insulation Material)				PA66 UL94 V-0		
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper alloy , Ni plated		
接线弹片材料(Material of Clamp spring)				--		
绝缘电阻(Insulation Resistance)				500MΩ or more at DC500V		
耐电压(1分钟)(Withstanding Voltage/1Min)				2000V		
额定冲击电压(Rated surge voltage)				--		
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)				M2.5 , 0.4Nm Max		
固定螺丝(Mounting Screw) , 扭矩(torque)				--		
剥线长度(Wire stripping length)				6.0mm		
使用温度(Operating temperature)				-40°C up to +105°C		
焊接方式(Soldering recommend)				--		

■ 订购方式(How to order)

TLB	1	00	H	W	XXXX	XXP	T01	S
Series No. 系列号	Pitch间距 P=8.00mm	Differentiate Number 区分号	Higher base 加高型	With wire protector 弹片型	Special code 特编号 XXXX=custom-made blank=standard	No. of Poles 极数 02-12P	Color 颜色 Transparent: T01	Screw Type 螺丝S=Slot C=Cross

Web:www.china-tianli.com TEL:+86-574-6347-9600,6389-6436

Mail : sale@china-tianli.cn

地址:中国浙江省宁波杭州湾新区庵东工业园区纬三路138号

ADD : 138 , Weisan Rd., Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China