


PCB terminal block — TLM series (Screwless Type) — TLM-207

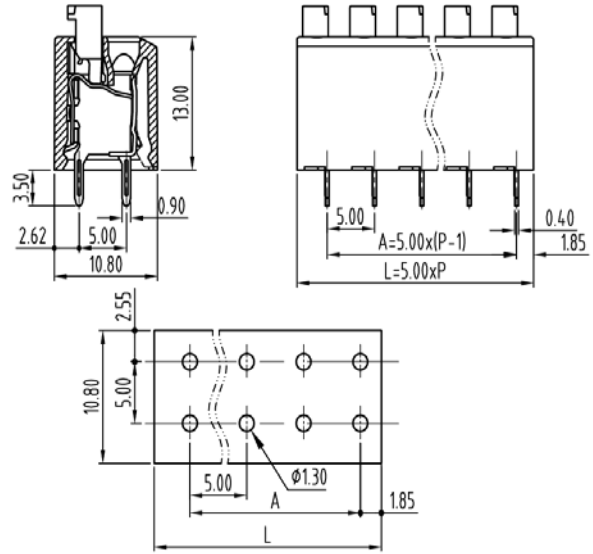

PCB Layout

■ 图示(Pic. shown) : TLM-207-04P-M19

General.
PCB terminal block Rated : 320V, 10A 1.5mm²
Single row , 5.00mm pitch , 02-24 Pole
Wiring orientation: 90°(wire-to-board)
Screwless Type

认证 (Approval) :



■ 技术参数Technical Data		UL standard			IEC standard		
UL应用组别(UL Application group)		UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		B	C	D			
额定电压(Rated voltage)		300V	--	300V	--	320V	--
额定电流(Rated current)		10A	--	10A	--	10A	--
额定连接容量(Rated connection capacity)		20-16AWG Sol&Str			0.5~1.5mm² Sol&Str		
绝缘材料(Insulation Material)				PA66 UL94 V-0			
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper alloy , Tin plated			
接线弹片材料(Material of Clamp spring)				Stainless Steel (GrNi)			
绝缘电阻(Insulation Resistance)				500MΩ or more at DC500V			
耐电压(1分钟)(Withstanding Voltage/1Min)				2200V			
额定冲击电压(Rated surge voltage)				--			
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)				--			
固定螺丝(Mounting Screw) , 扭矩(torque)				--			
剥线长度(Wire stripping length)				9.0mm			
使用温度(Operating temperature)				-40°C up to +105°C			
焊接方式(Soldering recommend)		Wave soldering ,260°C 5S Max (Single Wave) , 260°C 10S Max(Double Wave)					

■ 订购方式(How to order)

