
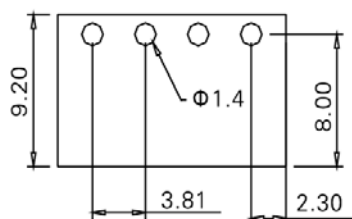


PCB Connector — TLP series (Pin header)— TLPHC-100R

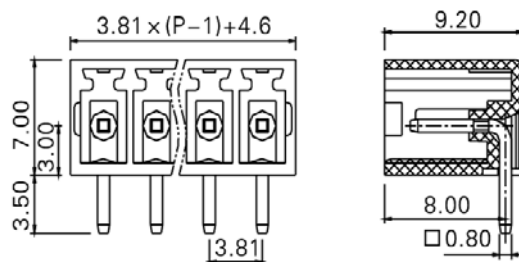

PCB Layout

■ 图示(Pic. shown) : TLPHC-100R-08P-G12

General. PCB Connector Rated : 150V,10A
Single row , 3.81mm pitch , 02-24 Pole
Orientation:180°(plug-in to board)

认证 (Approval) :



■ 技术参数Technical Data		UL standard			IEC standard		
UL应用组别(UL Application group)		UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)		300V	--	300V	--	150V	--
额定电流(Rated current)		10A	--	10A	--	10A	--
额定连接容量(Rated connection capacity)		--			--		
绝缘材料(Insulation Material)				PA66 UL94 V-0			
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper alloy , Tin plated			
接线弹片材料(Material of Clamp spring)				--			
绝缘电阻(Insulation Resistance)				500MΩ or more at DC500V			
耐电压(1分钟)(Withstanding Voltage/1Min)				2000V			
额定冲击电压(Rated surge voltage)				--			
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)				--			
固定螺丝(Mounting Screw) , 扭矩(torque)				--			
剥线长度(Wire stripping length)							
使用温度(Operating temperature)				-40°C up to +105°C			
焊接方式(Soldering recommend)		Wave soldering ,260°C 5S Max (Single Wave) , 260°C 10S Max(Double Wave)					

■ 订购方式(How to order)

TLPHC	1	00	R	XXXX	XXP	G12
Series No. 系列号	Pitch间距 1=3.81mm	Differentiate Number 区分号	Connection angle 角度 R=180° plug-in to board	Special code 特编号 XXXX=custom-made blank=standard	No. of Poles 极数 02-24P	Color 颜色 Green : G12

编码片 Coding key



P/N:
TLPCK-001-S

插头 (Female Connector) — single row



P/N : TLPS-100V
Wiring orientation :
180°(wire to plug-in)
Rated : 150V,10A , 1.5mm²
Screw clamp unit: M2.0 , 0.2Nm



P/N : TLPS-100R
Wiring orientation :
90°(wire to plug-in)
Rated : 160V,10A , 1.5mm²
Screw clamp unit: M2.0 , 0.2Nm



P/N : TLPS-100RL
Wiring orientation :
270°(wire to plug-in)
Rated : 160V,10A , 1.5mm²
Screw clamp unit: M2.0 , 0.2Nm



P/N : TLPS-101V
Wiring orientation :
180°(wire to plug-in)
Rated : 160V,10A , 1.5mm²
Spring clamp unit.